



# Samsung Galaxy Alpha microSIM Card Replacement

Samsung Galaxy Alpha microSIM Card Replacement

Written By: Tyler



## INTRODUCTION


This guide demonstrates how to remove the microSIM card in order to replace it.

## Step 1 — Removing the Back Panel



- On the back panel of the phone, find the slot that is on the top left side next to the flashlight.
- Insert your fingernail or prying tool into the slot and lift up to slightly open the top left corner of the back panel.
- Slide your fingernail or prying tool around the outer edge of the back panel to fully release it from the phone.

## Step 2 — Battery

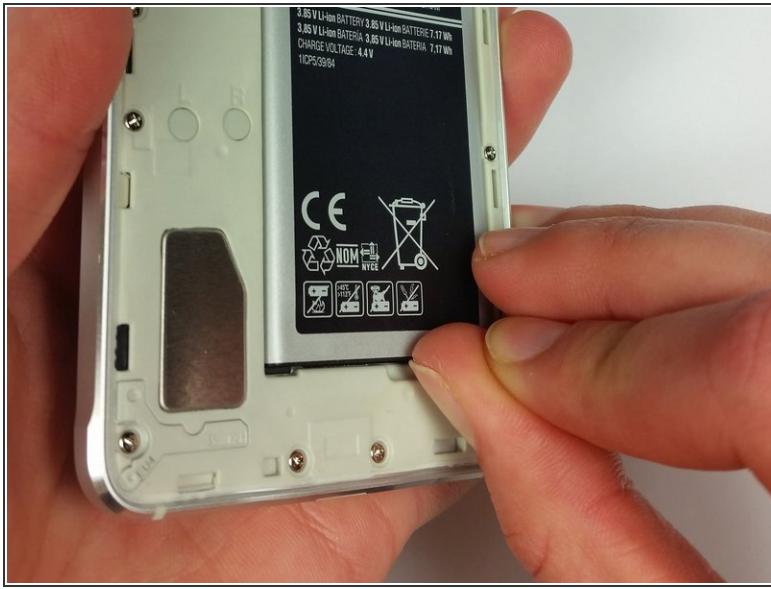

*(i)* Make sure the device is powered down before moving forward.

**⚠** Since the NFC antenna is glued to the battery, make sure the replacement also includes one.

- Locate the slot at the base of the battery and insert your thumb.
- Push slightly toward the battery and out, away from the phone to free the battery.

## Step 3 — microSIM Card



- Remove your Micro SIM card from the slot shown.

To reassemble your device, follow these instructions in reverse order.