



# Samsung Galaxy J1 Glass Screen Replacement

This guide will assist with the replacement of the Glass Screen of the Samsung Galaxy J1.

Written By: Sean Kramer



 **TOOLS:**

- [Phillips #00 Screwdriver](#) (1)
- [iFixit Opening Tools](#) (1)
- [Spudger](#) (1)

## Step 1 — Midframe



- Insert a finger nail or plastic opening tool between the back cover and the device.
- Gently pry the rear cover off of the back of the phone.

## Step 2



- Using a finger, pull the SIM card down out of its slot.
- Remove the SIM card.

*(i)* The pictured device is missing the SIM card and battery.

## Step 3



- Using a Phillips #00 screwdriver remove the eleven 3 mm screws.

## Step 4



- Insert a plastic opening tool between the screen and the back of the device.
- Starting at the bottom of the device, gently slide the tool along the edges of the screen.
- Gently pry the main assembly from the midframe of the device.

**⚠** When removing the main assembly, pry gently so as to not crack the glass screen or break any clips within the device.

## Step 5 — Glass Screen



- Using the flat end of a spudger, disconnect the digitizer cable connector.


## Step 6



- Using a plastic opening tool pry between silver digitizer and black back piece.
- Slowly slide plastic opening tool around the screen to loosen the adhesive.

**⚠** Be careful not to tear the digitizer cable when threading it through the plastic housing.

## Step 7

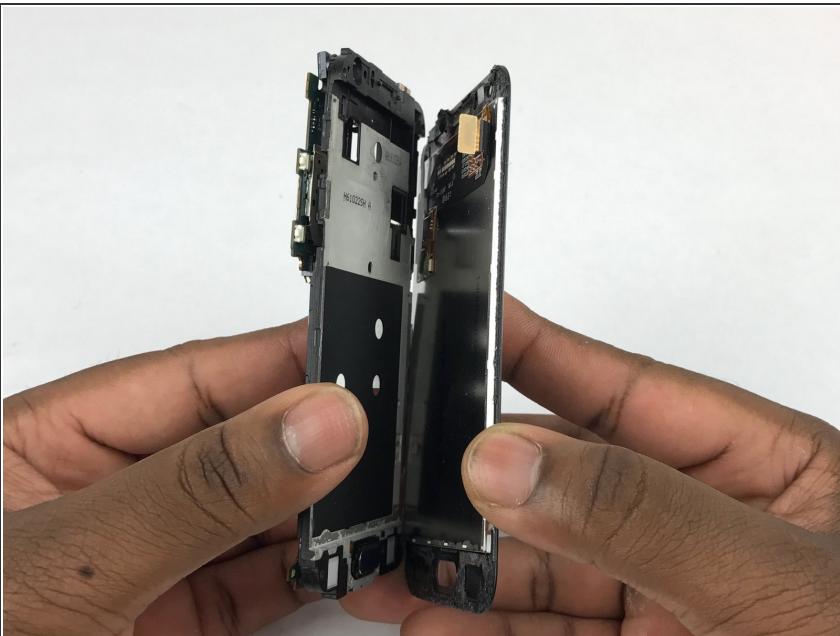

- Carefully separate display assembly from the plastic housing.

To reassemble your device, follow these instructions in reverse order.