



# Samsung Galaxy J1 Rear Camera Replacement

This guide will assist in the replacement of the Samsung Galaxy J1's rear Camera.

Written By: Sean Kramer



# INTRODUCTION

Use this guide to replace the Rear Camera.

## TOOLS:


- [Phillips #00 Screwdriver](#) (1)
- [iFixit Opening Tools](#) (1)
- [Spudger](#) (1)

## Step 1 — Midframe



- Insert a finger nail or plastic opening tool between the back cover and the device.
- Gently pry the rear cover off of the back of the phone.

## Step 2

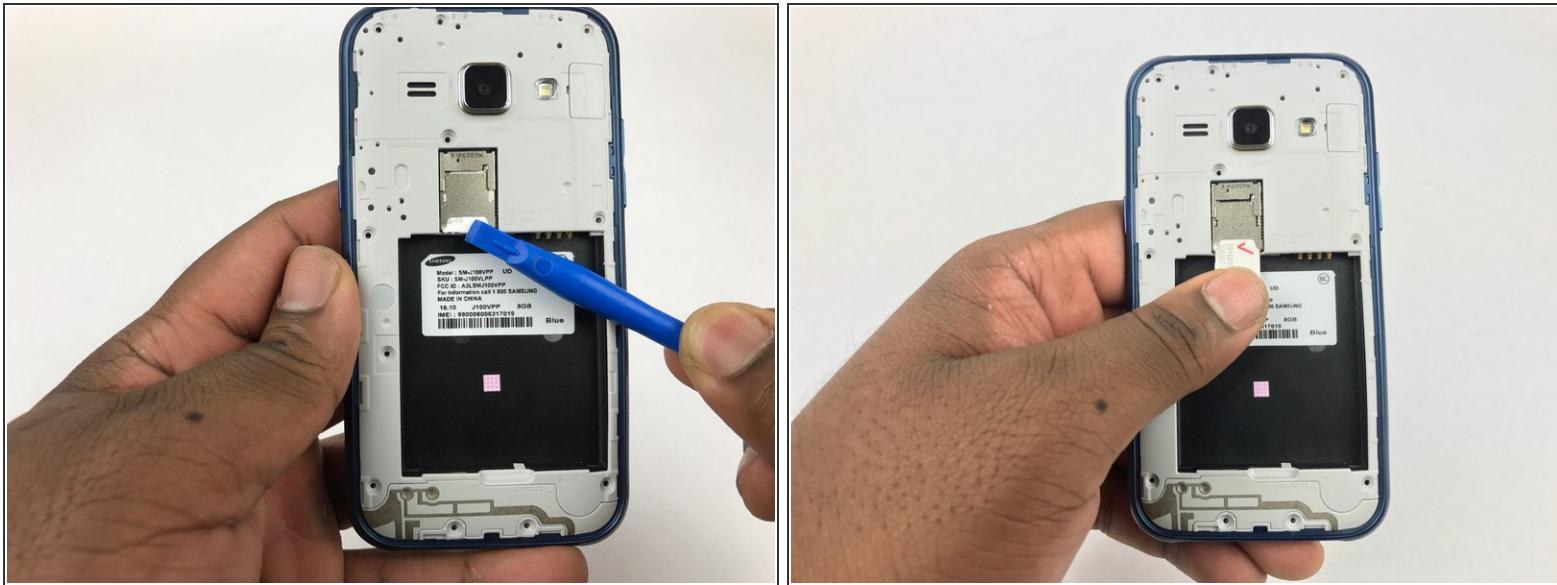

- Using a finger, pull the SIM card down out of its slot.
- Remove the SIM card.

**(i)** The pictured device is missing the SIM card and battery.

## Step 3



- Using a Phillips #00 screwdriver remove the eleven 3 mm screws.



## Step 4



- Insert a plastic opening tool between the screen and the back of the device.
- Starting at the bottom of the device, gently slide the tool along the edges of the screen.
- Gently pry the main assembly from the midframe of the device.

**⚠** When removing the main assembly, pry gently so as to not crack the glass screen or break any clips within the device.

## Step 5 — Rear Camera

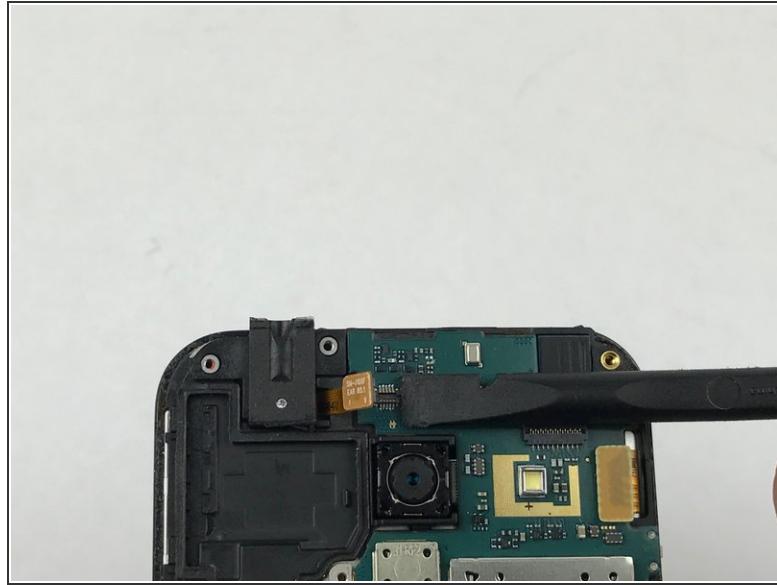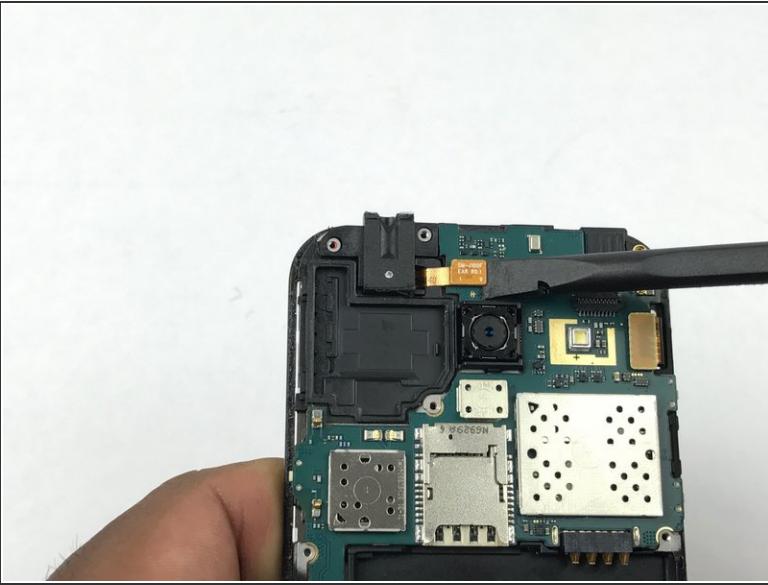

- Use the flat end of a spudger to disconnect the ear speaker connector from the motherboard.

## Step 6




- Use the flat end of a spudger to disconnect the digitizer connector from the motherboard.

## Step 7



- Use a plastic opening tool to gently pry under the motherboard.
- Remove motherboard.

## Step 8

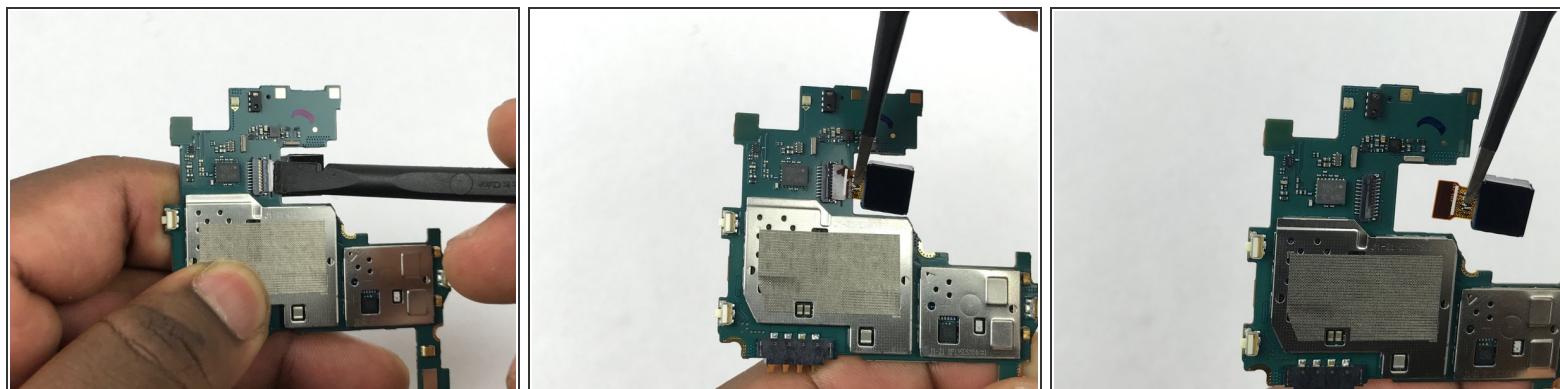

- Use the flat end of a spudger to disconnect the rear camera from the motherboard.
- Remove the rear camera.

To reassemble your device, follow these instructions in reverse order.