



# Samsung Galaxy J3 Headphone Jack Replacement

Replacing the headphone jack to bring back sound when using a pair of headphones.

Written By: Makayla Williams



## INTRODUCTION

Sometimes the headphone jack can get extremely dirty or get something lodged in it. This guide will show you how to remove and replace the headphone jack.

### TOOLS:


- [Metal Spudger \(1\)](#)
- [Phillips #000 Screwdriver \(1\)](#)

## Step 1 — Headphone Jack



- Separate the back casing from the phone by carefully using your fingers to pry it apart.

## Step 2

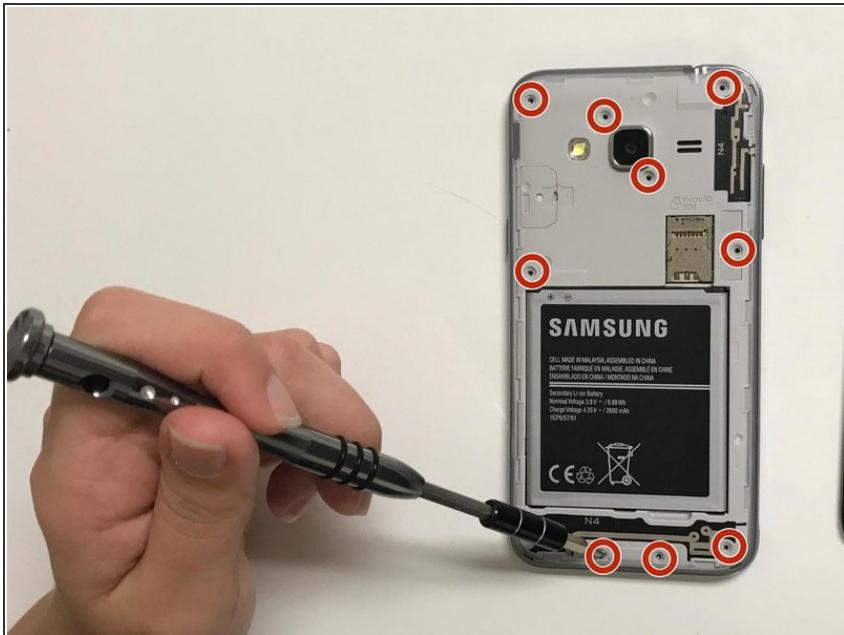

- Remove all 11 screws by using the J000 phillips

## Step 3



- Remove the battery by gripping on and pulling up.


## Step 4



- Use the flat side of the metal spudger to remove the middle frame bezel.

**⚠** Do not use a wrenching motion while performing this step. The screen may crack.

## Step 5

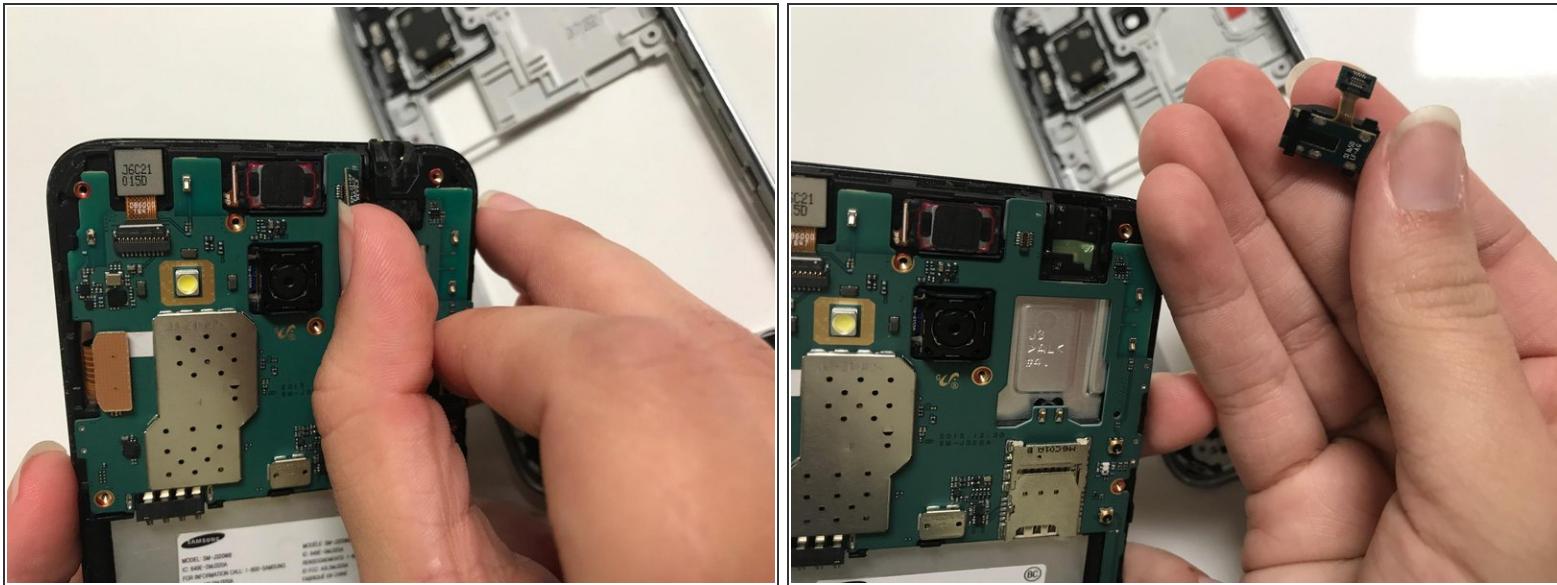

- Detach the headphone jack from the motherboard plug-in.
- Replace the headphone jack.

To reassemble your device, follow these instructions in reverse.