




Samsung Galaxy J3 Mission Midframe Replacement

How to remove the midframe from the Samsung Galaxy J3 Mission. This panel encloses the motherboard for protection.

Written By: Joseph Toth

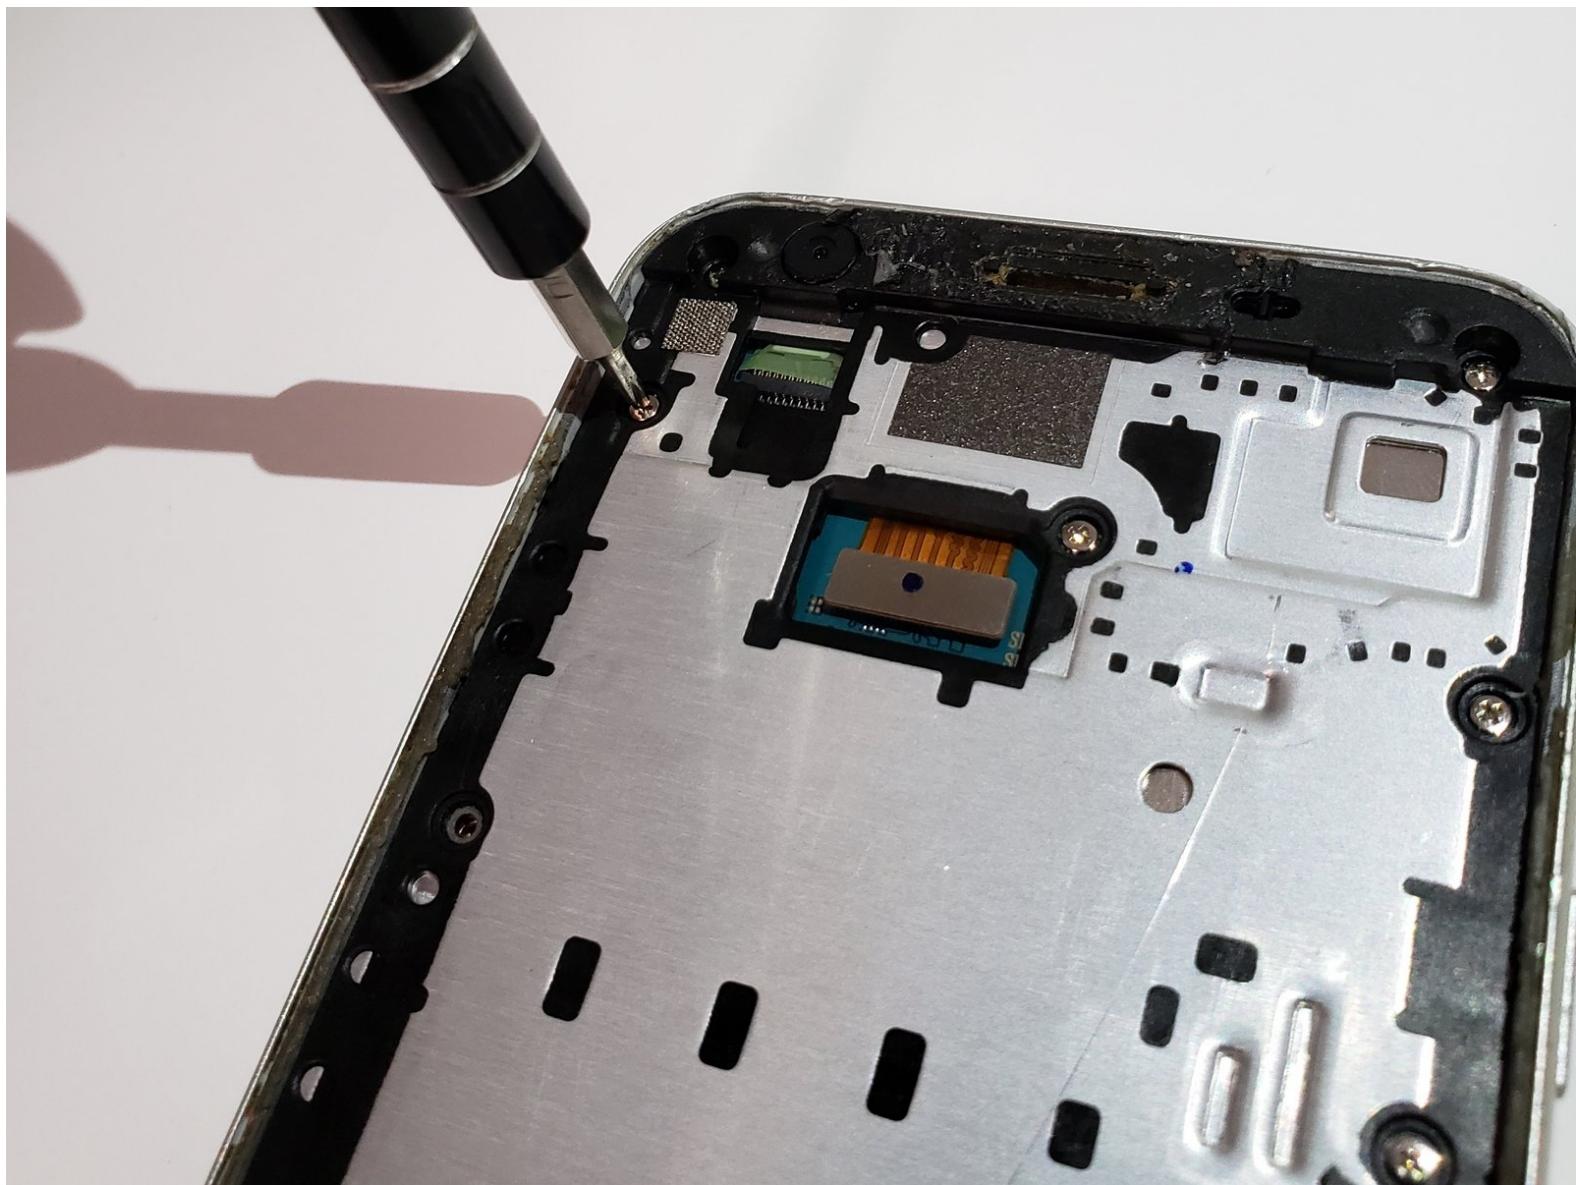

This document was generated on 2020-04-04 05:30:18 AM (MST).

INTRODUCTION

Removing the midframe takes a bit of time to do, as there are many screws that help keep it in place. This panel is in place to protect the important inside components of the device and also to give the device stability.

TOOLS:

- [iFixit Opening Tools \(1\)](#)
- [Phillips #000 Screwdriver \(1\)](#)

Step 1 — Back Cover



- Insert your fingernail into the back cover removal slot and gently pull back until the cover pops off.

Step 2 — Battery



- Insert your fingernail into the battery removal slot and pull back until the battery pops out.

 Make sure that your device is powered off before removing the battery.

Step 3 — SD and SIM Cards



- Use your finger to slide the SD and SIM card out of the device.


Step 4 — Screen



- Very carefully use your blue prying tool to lift the screen from one of the vertical sides of the phone.

 Screen is very fragile. Handle with care!

Step 5 — Midframe

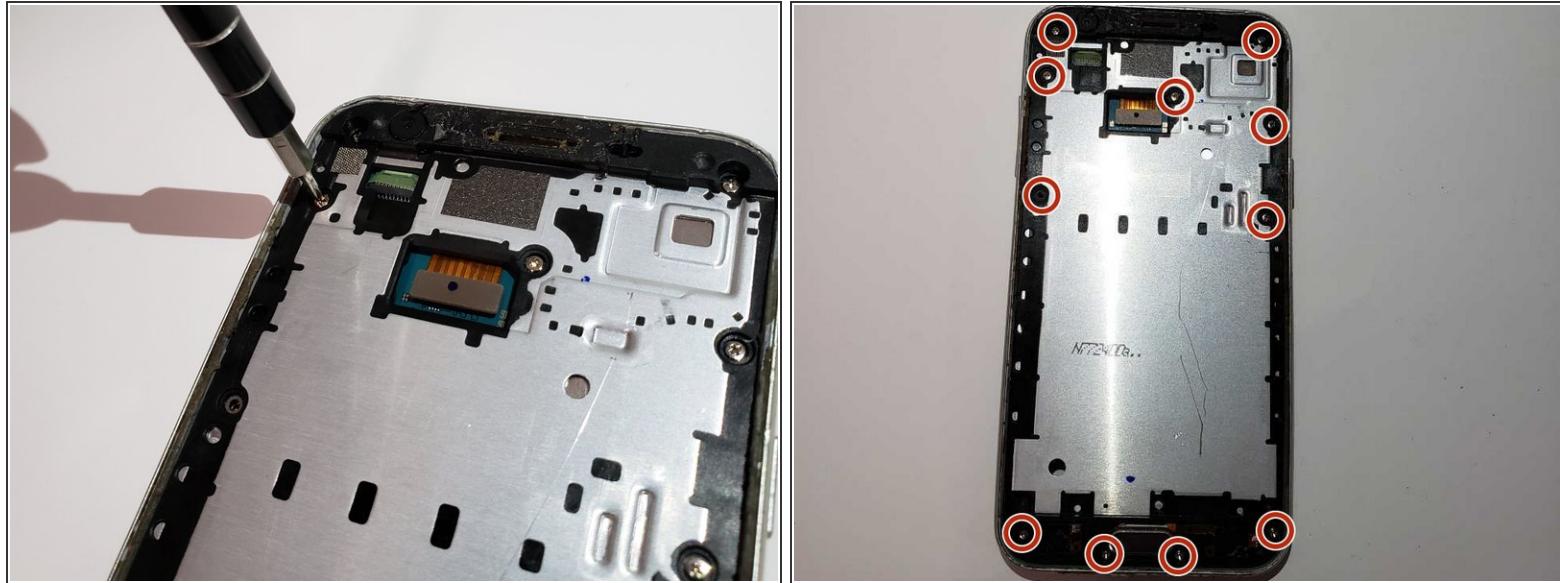

- Using a Phillips #000 screwdriver, remove all eleven 5mm screws from the metal panel.

Step 6



- Turn the device over, and push firmly to separate the metal plate from the back paneling.

To reassemble your device, follow these instructions in reverse order.