



Samsung Galaxy J3 Motherboard Replacement

This guide will help you replace the motherboard on you Samsung Galaxy J3.

Written By: Sophie



INTRODUCTION

This guide will help you replace the motherboard on you Samsung Galaxy J3.

TOOLS:

- [Phillips #00 Screwdriver](#) (1)
- [Metal Spudger](#) (1)

Step 1 — Back Cover Removal




- Using your fingernail, pop off the back cover and set it aside.

Step 2 — Battery Removal



- Pry out the battery using your fingernail.


Step 3 — Main Body Removal

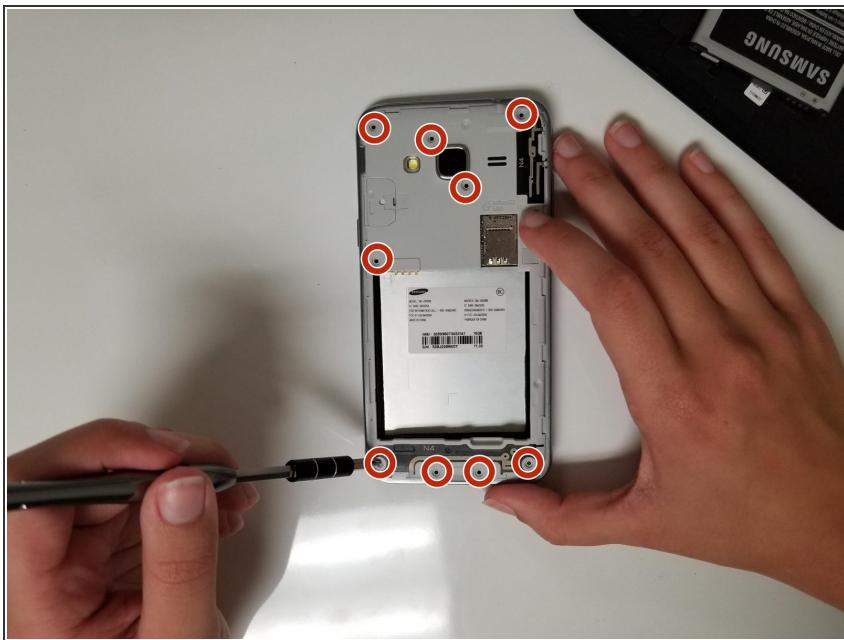

- Using a J00 Phillips head screwdriver, remove the 9 screws pictured.

 Remember to keep your screws organized!


Step 4

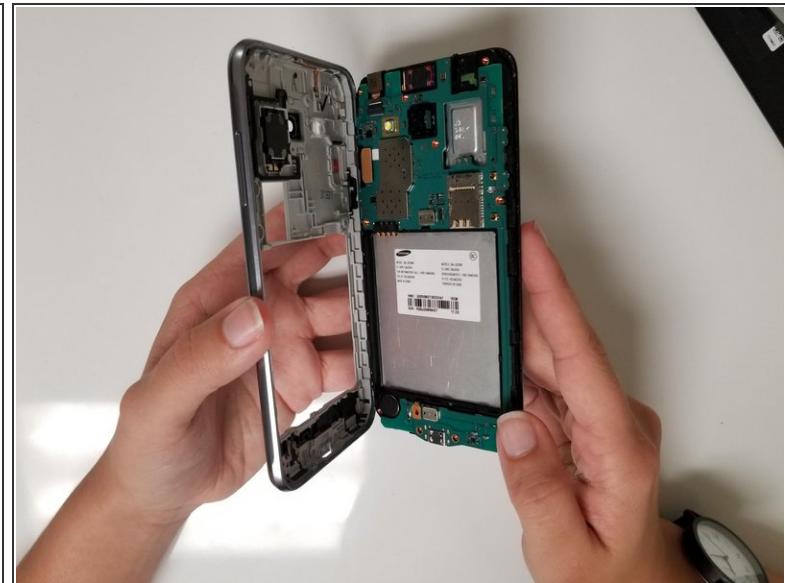

- Use metal spudger to remove the back casing.

 Do not use a wrenching motion or the screen will crack.

Step 5

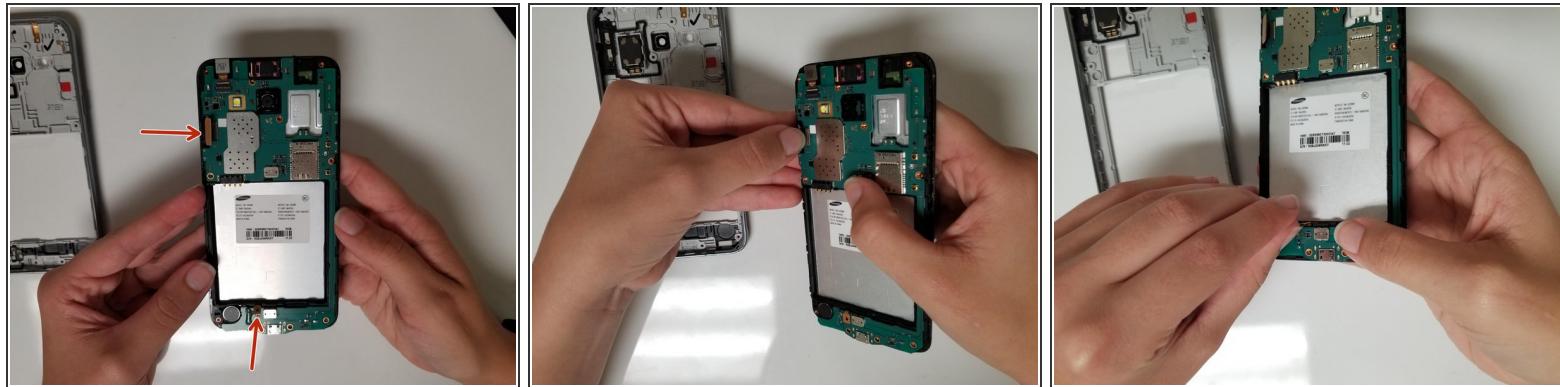

- Detach the two pieces as shown in the picture.

Step 6



- Gently take off the motherboard.

i It should come off easily, if not something may still be connected.

To reassemble your device, follow these instructions in reverse order.