



# Samsung Galaxy J7 Screen Assembly Replacement

Use this guide to replace a cracked or non-functioning screen on your Samsung Galaxy J7.

Written By: Gabriel Arellano




## Step 1 — Back Cover



- Take off the back by pulling on the tab near the top left of the back of the device.

## Step 2 — Back Panel Disassembly

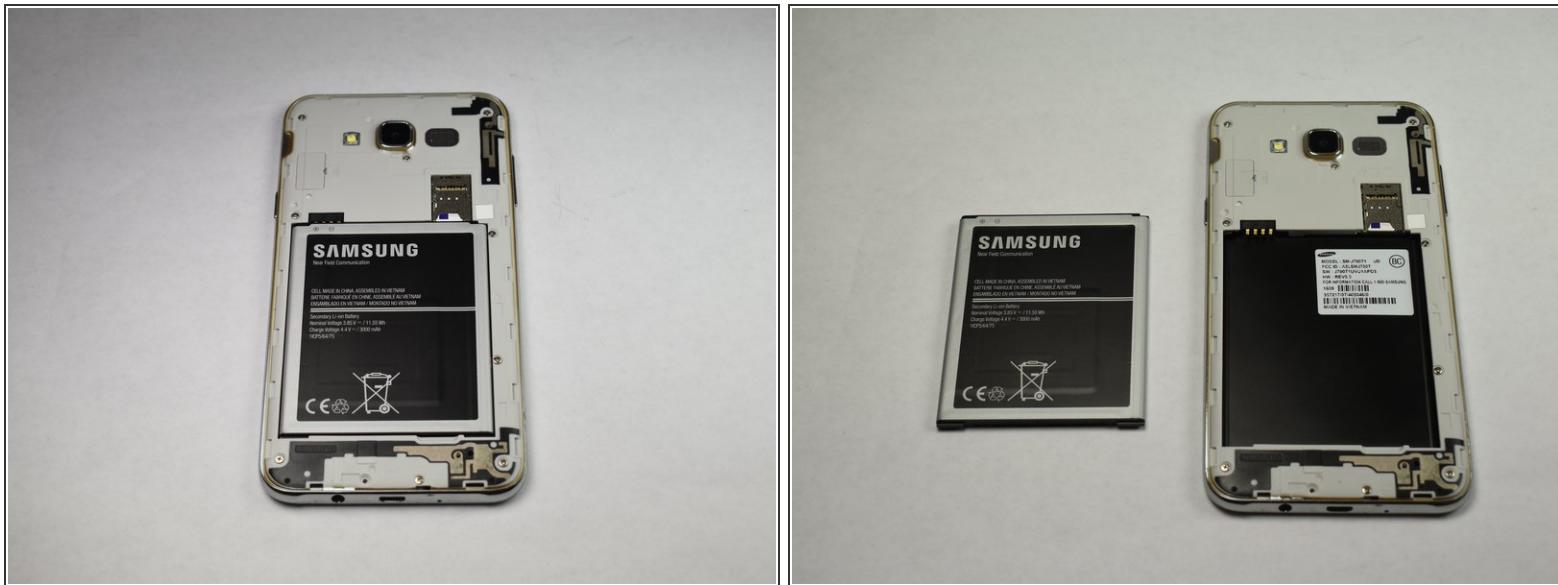

- Take out the battery before unscrewing the screws.

## Step 3



- Using the Phillips screwdriver bit size 000, unscrew out all 10 4.19mm screws.

## Step 4



- Use the iFixit Opening Tool to lift up the back, to disconnect the back with the inside of the device.

## Step 5 — Screen Assembly



- With the motherboard removed begin by identifying the speaker piece.

## Step 6



- Gently lift the speaker piece and disconnect the connection to the panel by lifting it up.

## Step 7



- Disconnect the connection by gently lifting up the tab .
- Lift the motor from the panel.

## Step 8



- Take your new screen and reverse the step to replace the screen.

To reassemble your device, follow these instructions in reverse order.