




Samsung Galaxy Note5 rear camera & front camera & earpiece Replacement

Samsung Galaxy Note 5 rear camera replacement, front camera replacement and earpiece replacement share most the same steps, so show them together.

Written By: Sophia

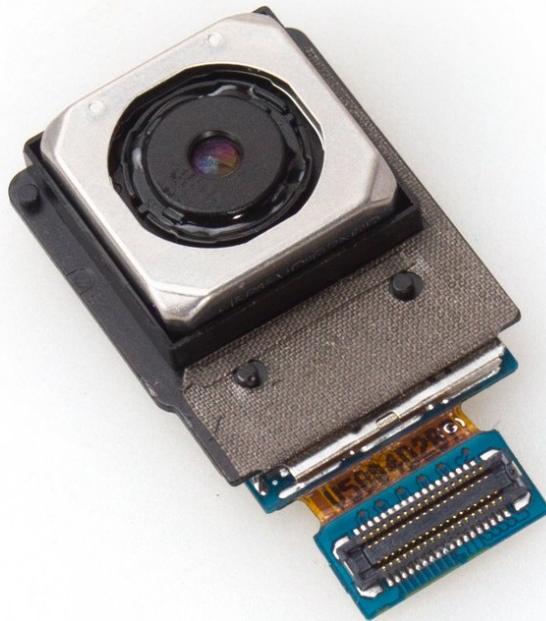

INTRODUCTION

[video: <https://www.youtube.com/watch?v=CQjNBUDEOio>]

TOOLS:

- Heat Gun (1)
- iFixit Opening Picks set of 6 (1)
- Suction Handle (1)
- Phillips #000 Screwdriver (1)
- Spudger (1)

PARTS:

- Galaxy Note5 Rear Camera (1)
- Galaxy Note5 Front Camera (1)
- Galaxy Note5 Earpiece Speaker (1)

Step 1 — Rear camera & front camera & eapiece




- Remove SIM card tray.

Step 2



- Remove S Pen.

Step 3

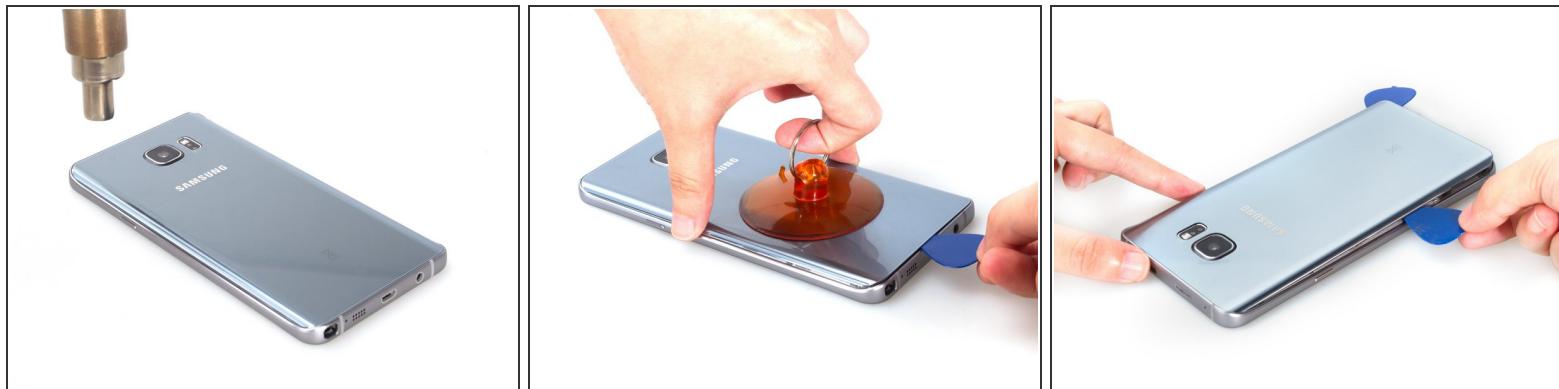

- Remove back cover.

Step 4



- Remove screws.

Step 5



- Remove middle housing.

Step 6




- Remove battery. But it's not necessary. You also can just release battery connector from motherboard.

Step 7




- Release the connector on the board.

Step 8

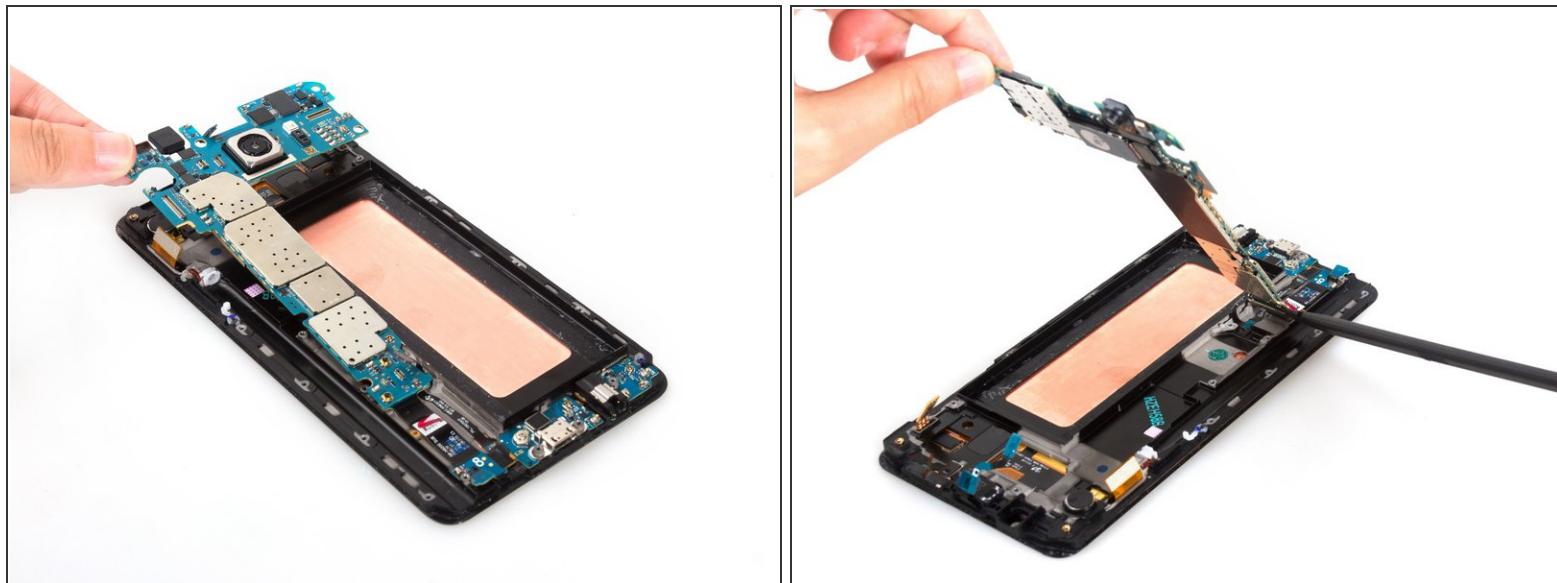


- Release the USB board connector on the back and remove the motherboard from front assembly.

Step 9

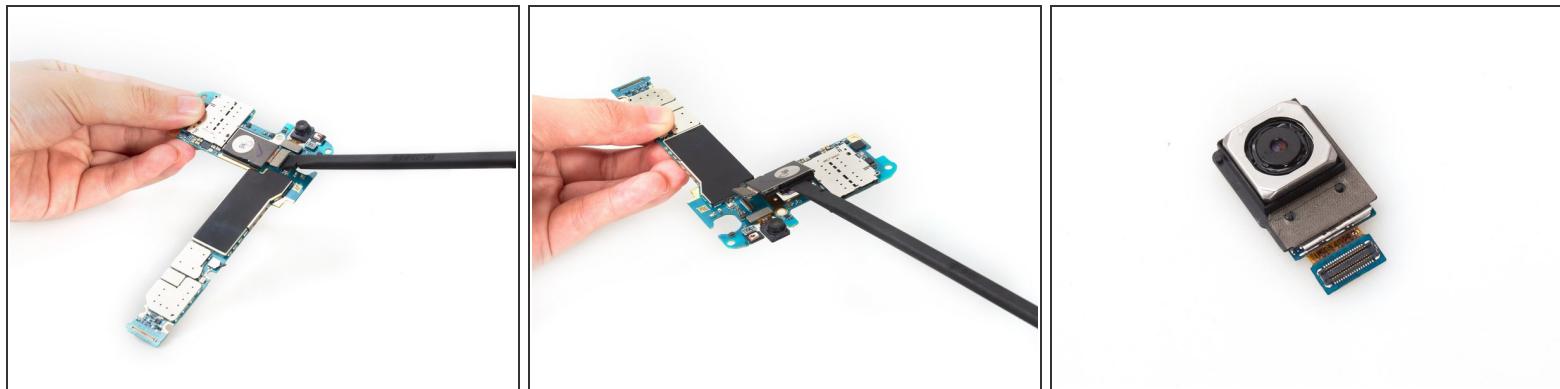


- Remove rear camera.

Step 10

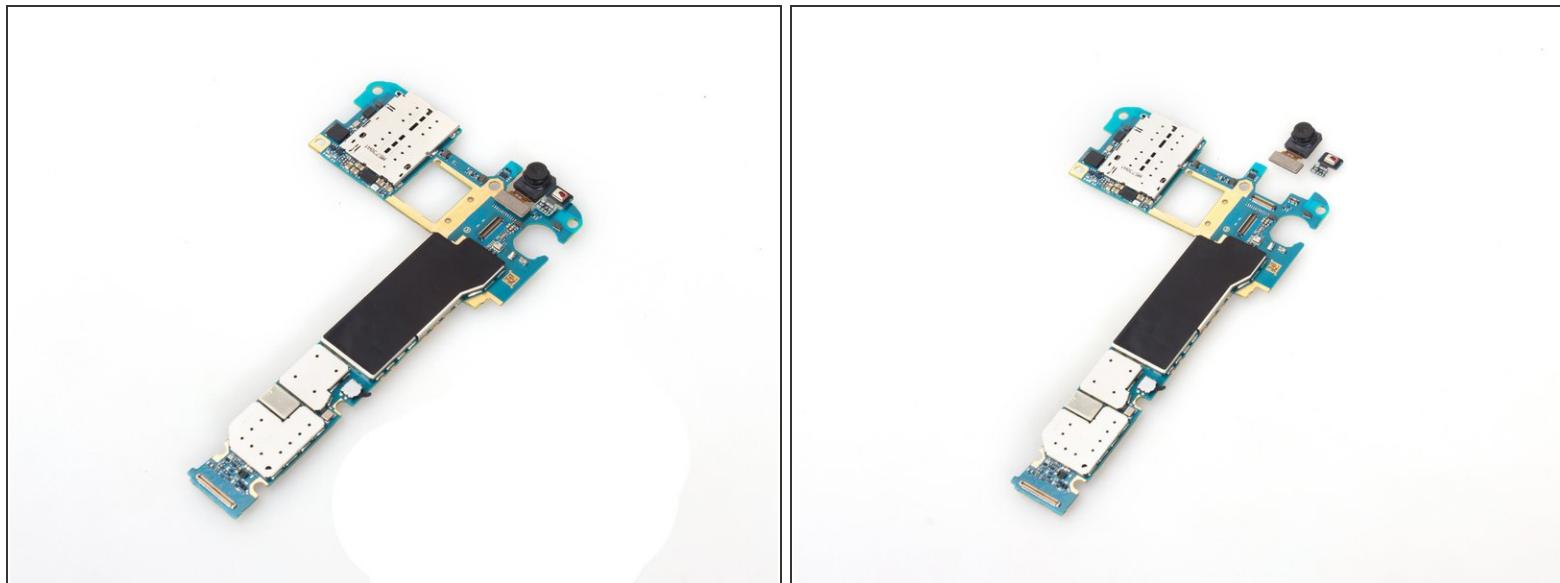

- Remove front camera and noise-canceling mic.

Step 11

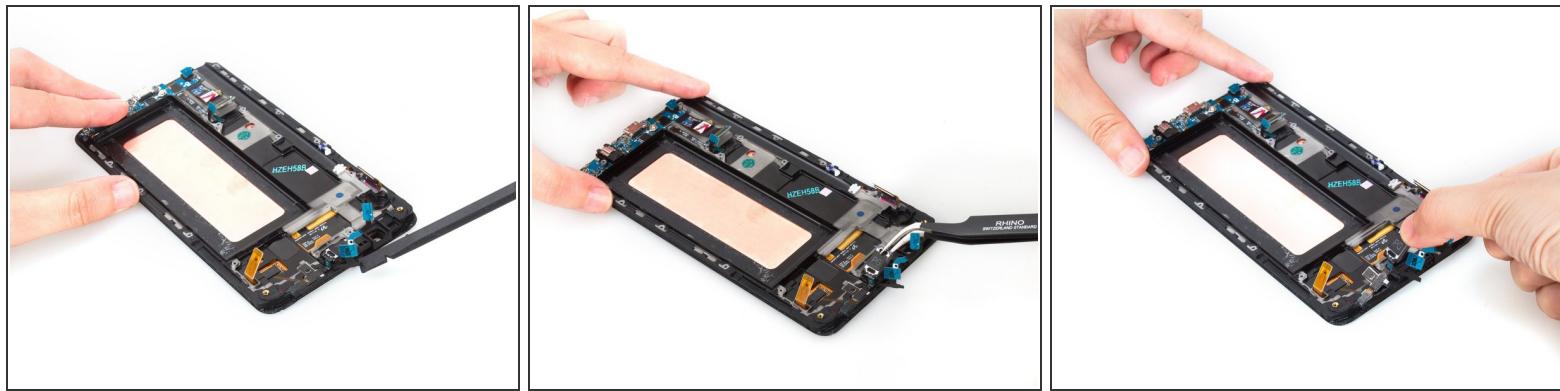

- Remove earpiece assembly.

Step 12



- That's earpiece with sensors.

To reassemble your device, follow these instructions in reverse order.