




Samsung Galaxy Prevail 2 Vibrator Replacement

If for any reason you need to replace your phone's vibration motor, this guide will show you how.

Written By: Garrett Bowleg

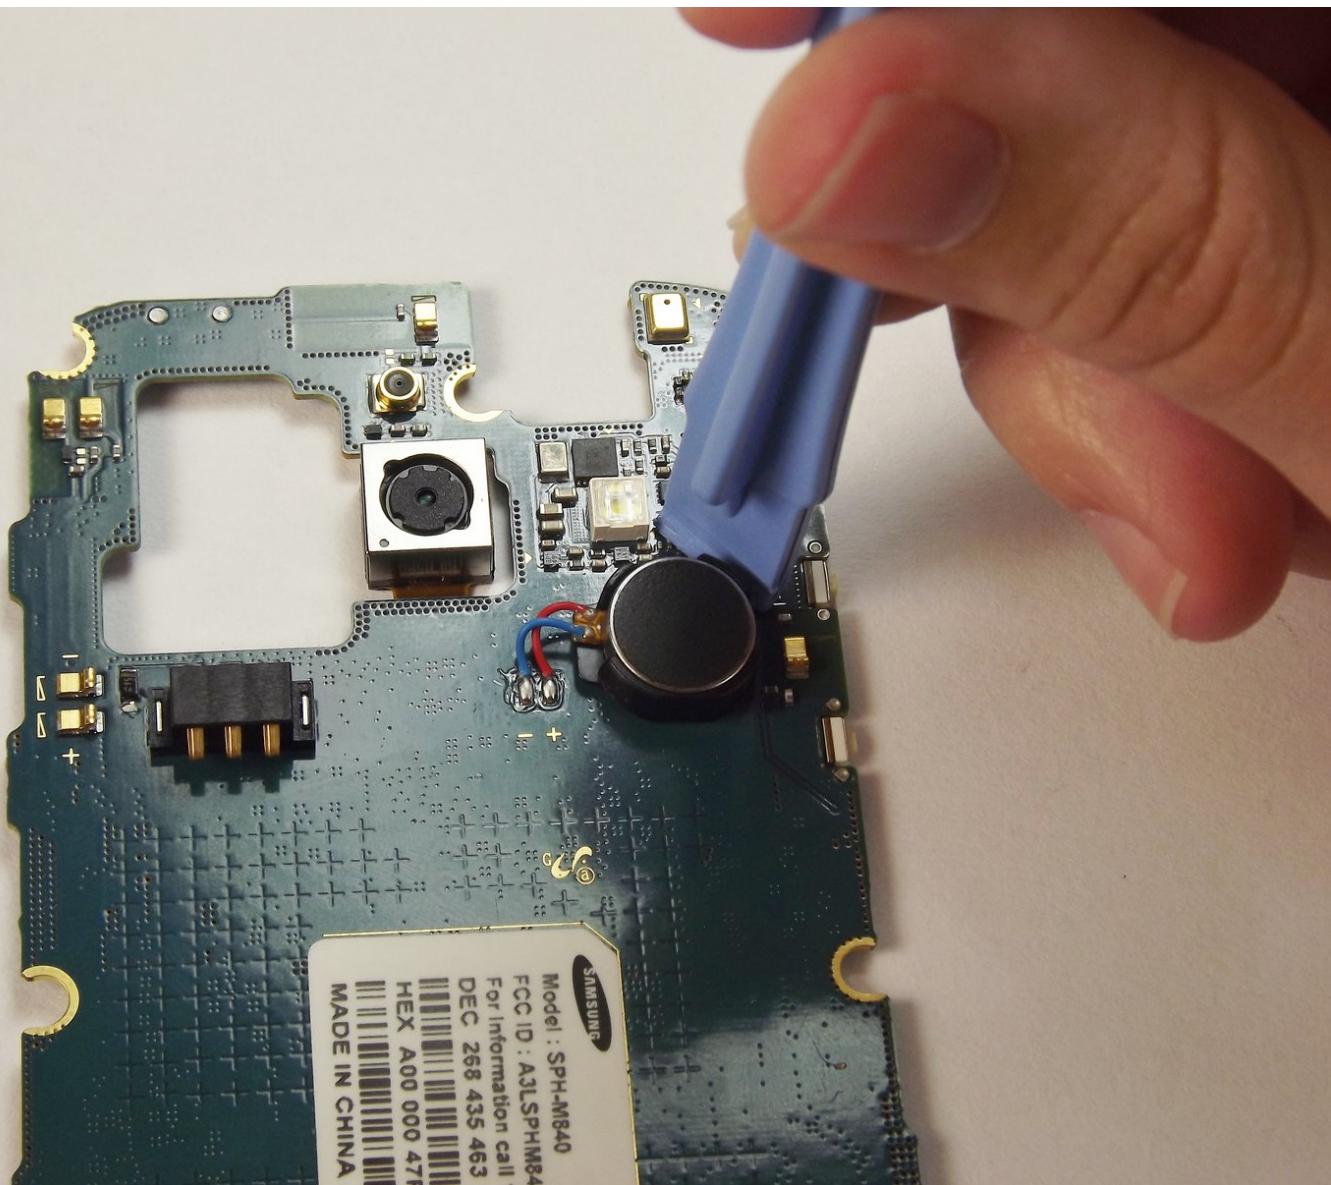

INTRODUCTION

This guide will teach you how to replace the vibration motor of the Samsung Galaxy Prevail 2. Prior knowledge of how to use a soldering iron is required.

TOOLS:

- [Spudger \(1\)](#)
- [Soldering Iron \(1\)](#)

Step 1 — Removing Back Casing



- Using your finger nails or the spudger; pry the plastic casing open, and pull away from the body of the phone.

Step 2 — Remove Battery



- Gently pull the battery out of the phone.

Step 3 — Remove Screws




- Unscrew all of the screws.
- ⓘ Be sure to set the screws aside in a safe place.

Step 4 — Pry Off Back of Phone




- Insert the plastic prying tool between the silver frame and the white face of the phone. to pry off the front frame.
- ⓘ Make sure to pry around the entire frame to loosen it before proceeding.
- Use your thumbs to separate the motherboard from the back of the phone.

Step 5 — Open the Motherboard

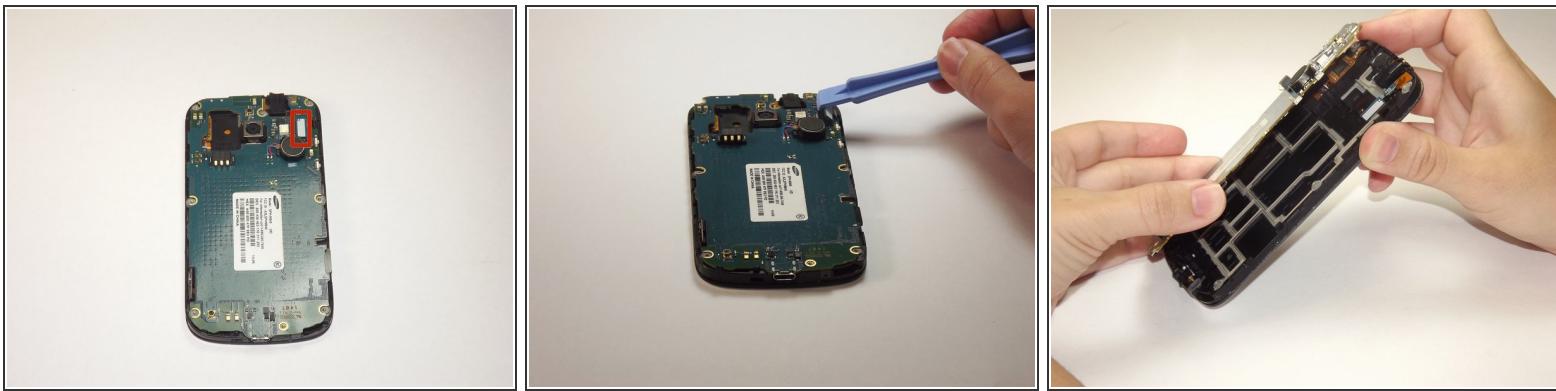


- With the plastic prying tool, lift up the flap in order to fully open the motherboard.

Step 6 — Detach Motherboard

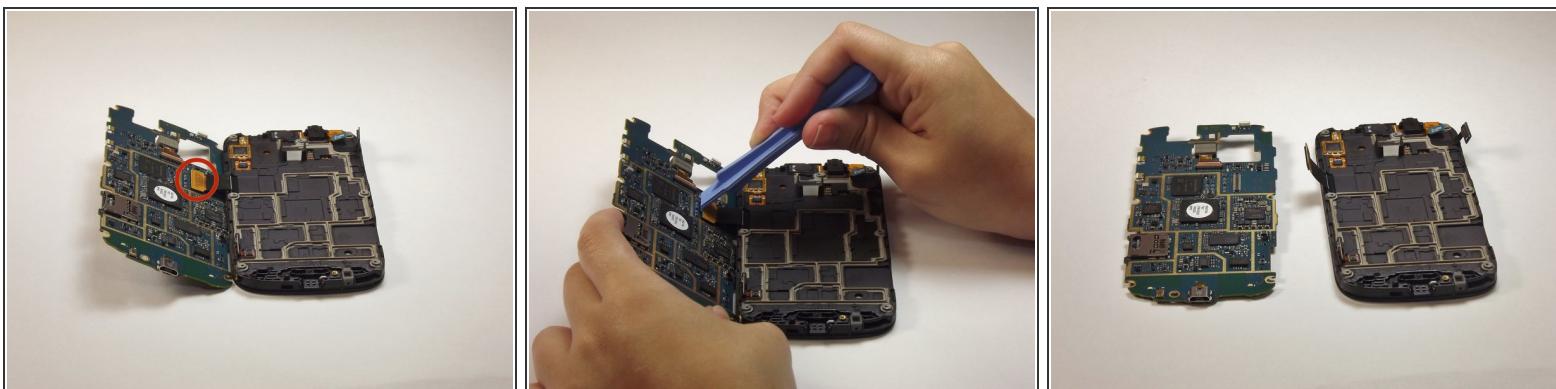


- With plastic prying tool, lift the flap up to divide the motherboard.
- (i)* This will make it easier to detach the internal battery.

Step 7 — Locate and Release Vibration Motor

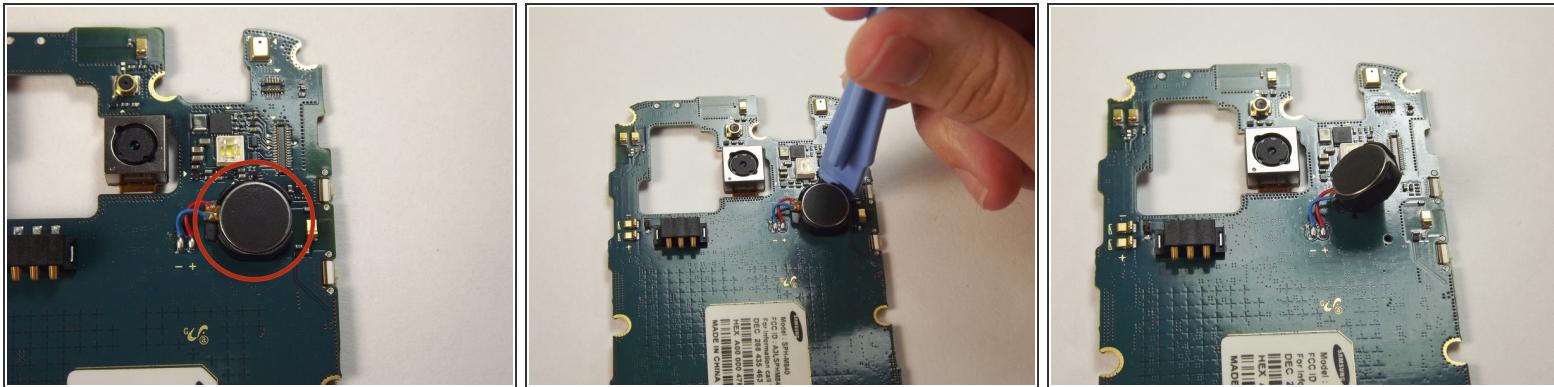

- With plastic prying tool, lift up the vibration motor.

Step 8 — Detach Vibration Motor

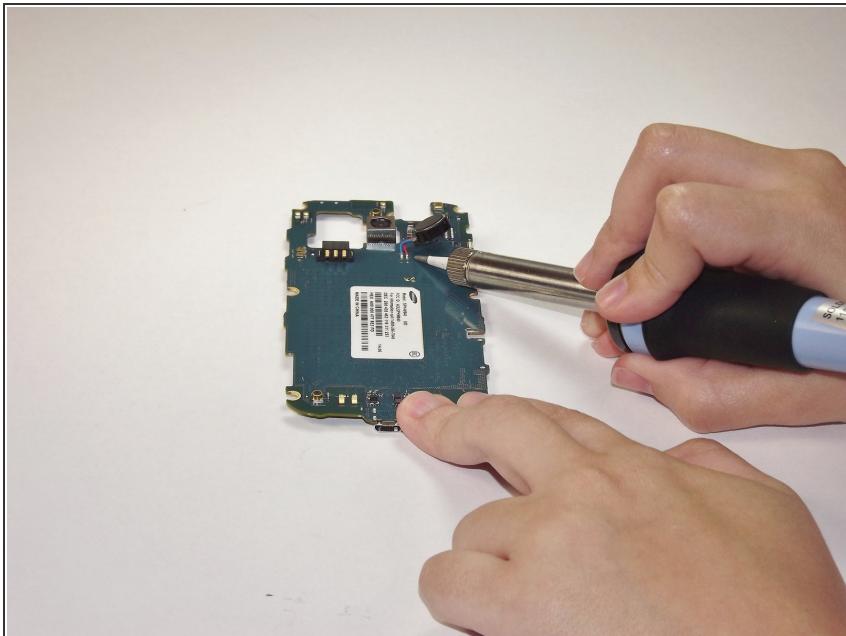

- With the soldering iron remove the solder attaching the vibration motor to the motherboard.

To reassemble your device, follow these instructions in reverse order.