



# Samsung Galaxy Rush Display Replacement

Did your phone take a fall or just died? Use this guide to replace your screen.

Written By: Kenny Afiadata



## INTRODUCTION

This guide will help you replace the LCD screen or your motherboard on your Samsung Galaxy Rush. It is not a lengthy process and you will have a brand new screen in about 30 minutes.

### TOOLS:

- [Phillips #0 Screwdriver](#) (1)
- [iFixit Opening Tools](#) (1)

## Step 1 — Rear Case




- Looking at the back of your phone, use your finger to remove back cover.

## Step 2




- Remove the battery.

## Step 3

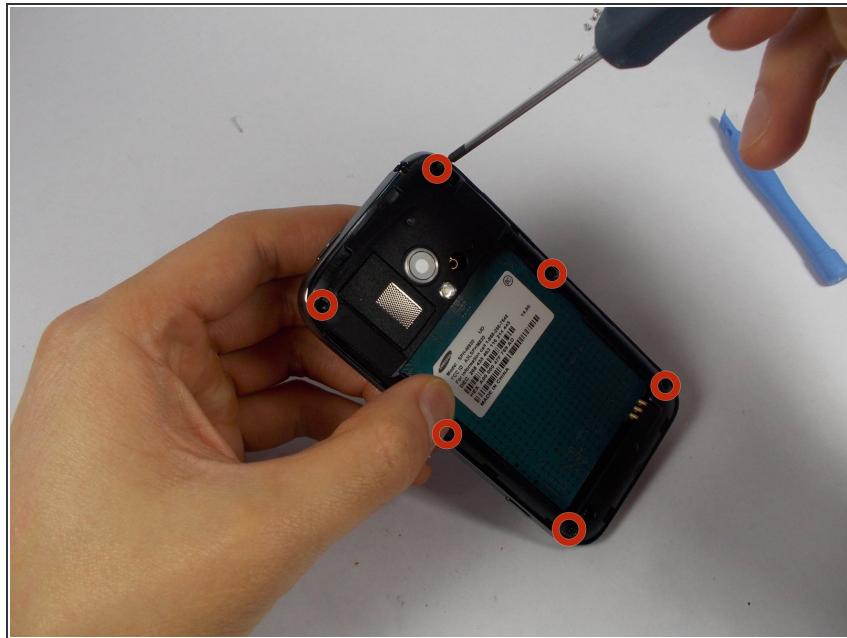


- With a small phillips-head screw driver, remove the six screws holding the back panel in place.

## Step 4

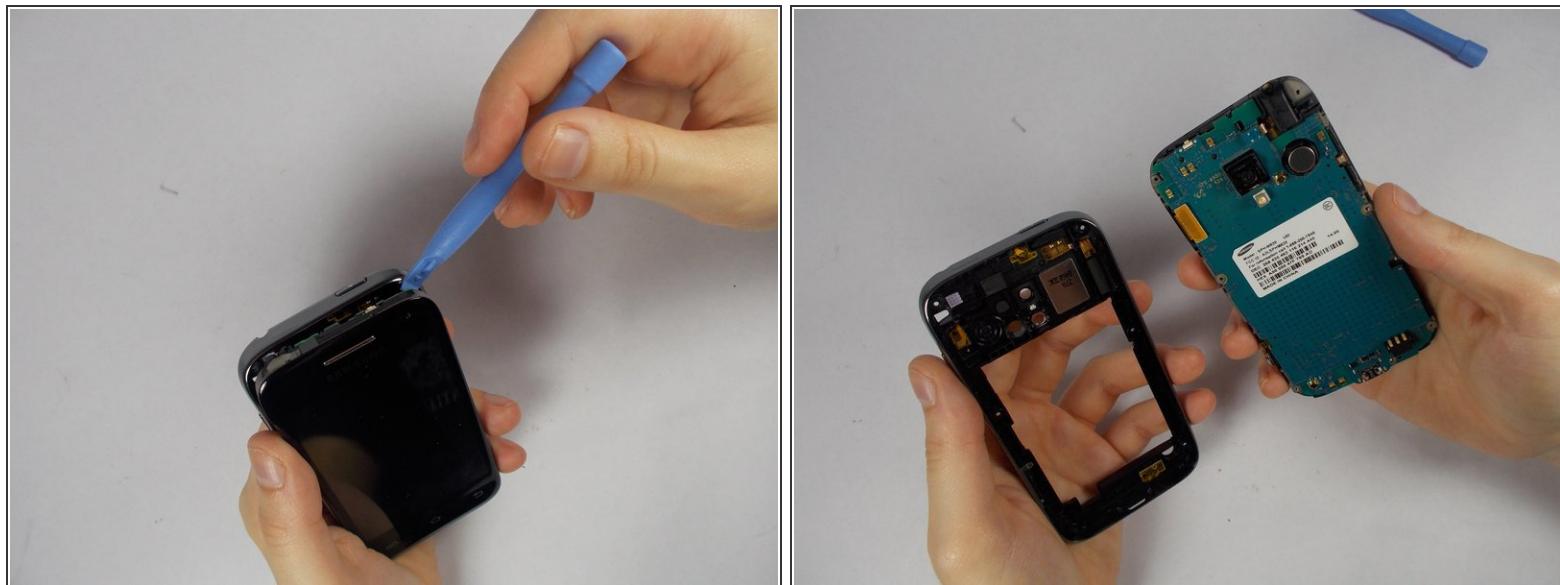


- Use the pry tool to pry the back panel from the rest of the phone. Pry from the edge closest to the screen for simplicity.

## Step 5 — Connectors

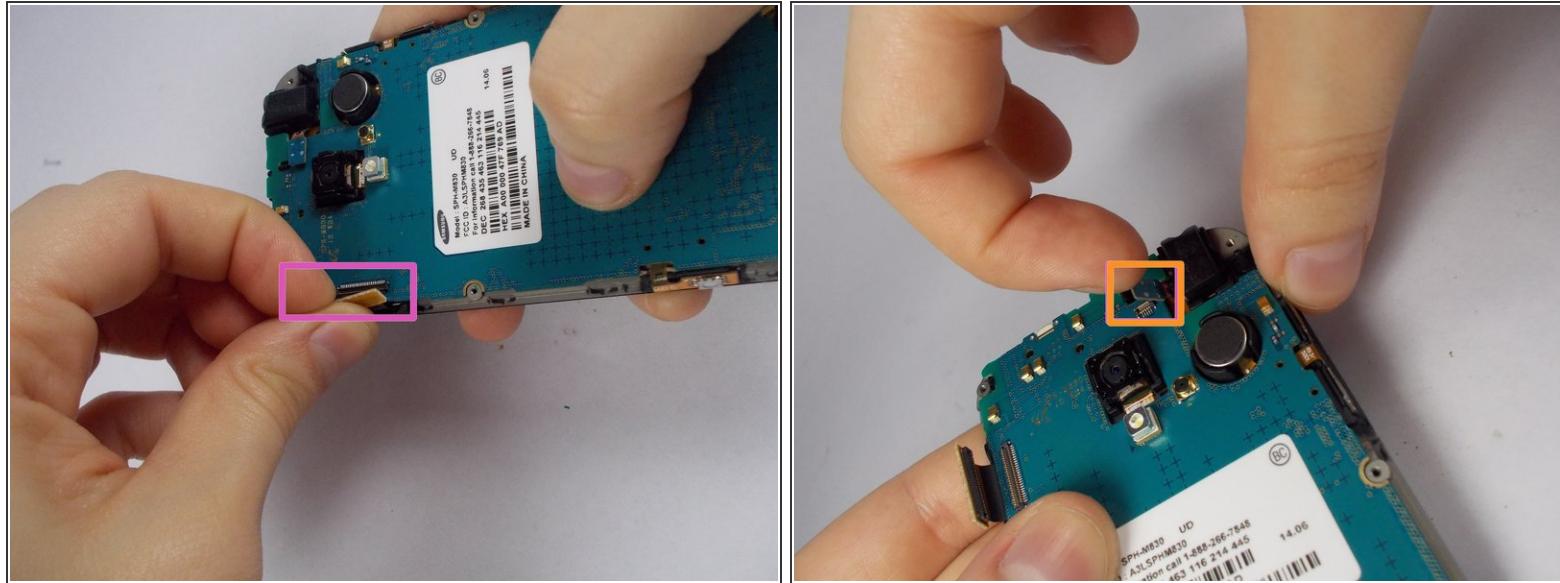


- Using tweezers, gently lift connectors from motherboard.
- A connector will be on the upper left
- The second connector is located towards the top of the phone. Above the camera. It comes off with ease.

## Step 6

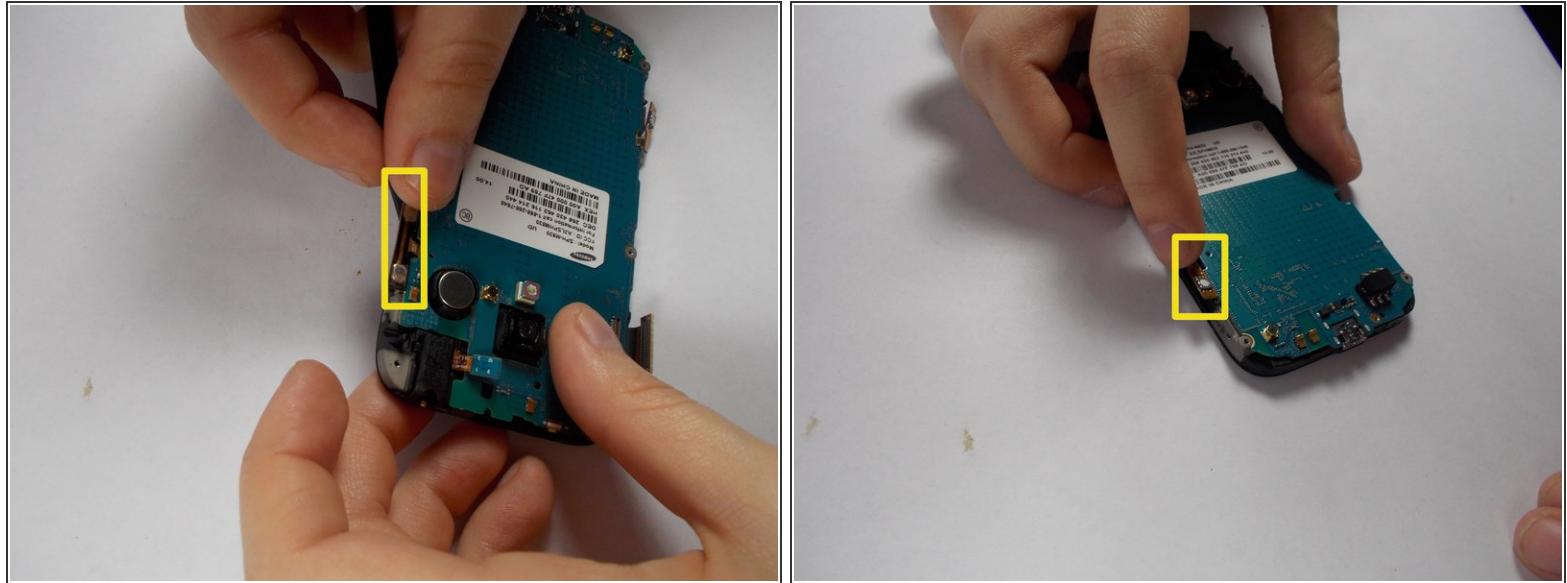


- Use the tweezers to carefully remove the 2 adhesive orange ribbons.
- These stay attached to the motherboard so be careful not to break them.
- They are on the side of the phone.

## Step 7

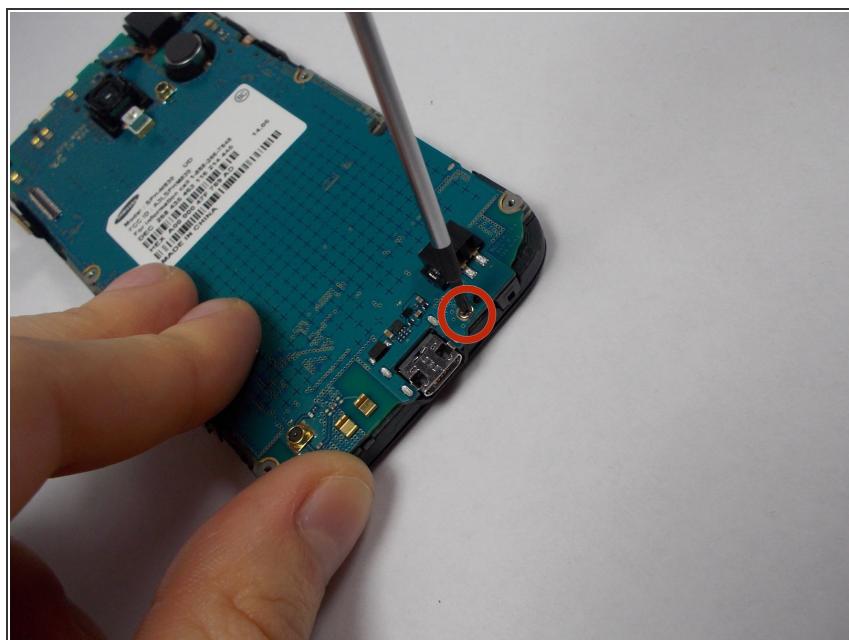

- Use a philips-head screwdriver to remove the single screw on the bottom of the phone. Located to the right of the charging port.

## Step 8

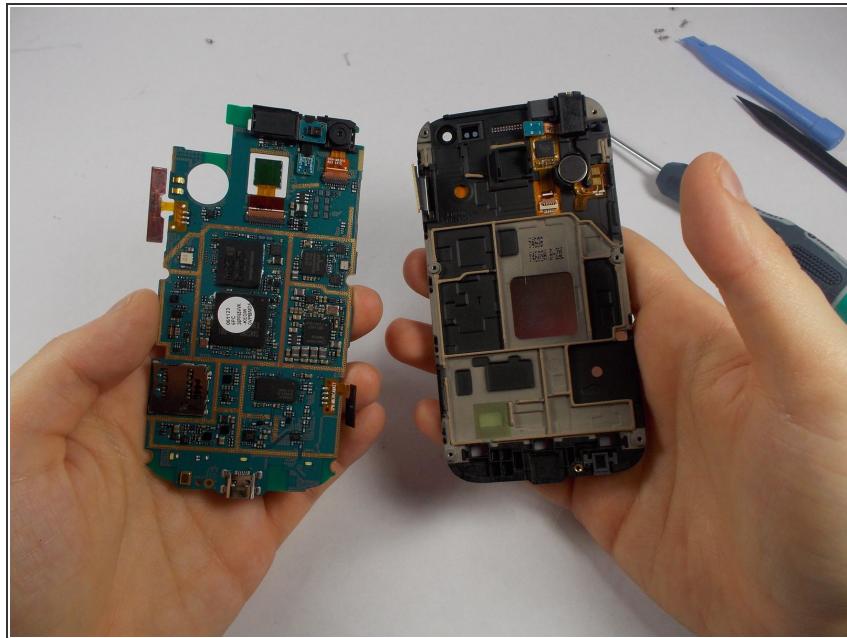

- Lift the motherboard upwards separating it from your screen.

To reassemble your device, follow these instructions in reverse order.