




Samsung Galaxy S Blaze Volume Rocker Replacement

This guide will show how to properly replace a volume rocker for a Samsung Galaxy S Blaze.

Written By: Jake Best

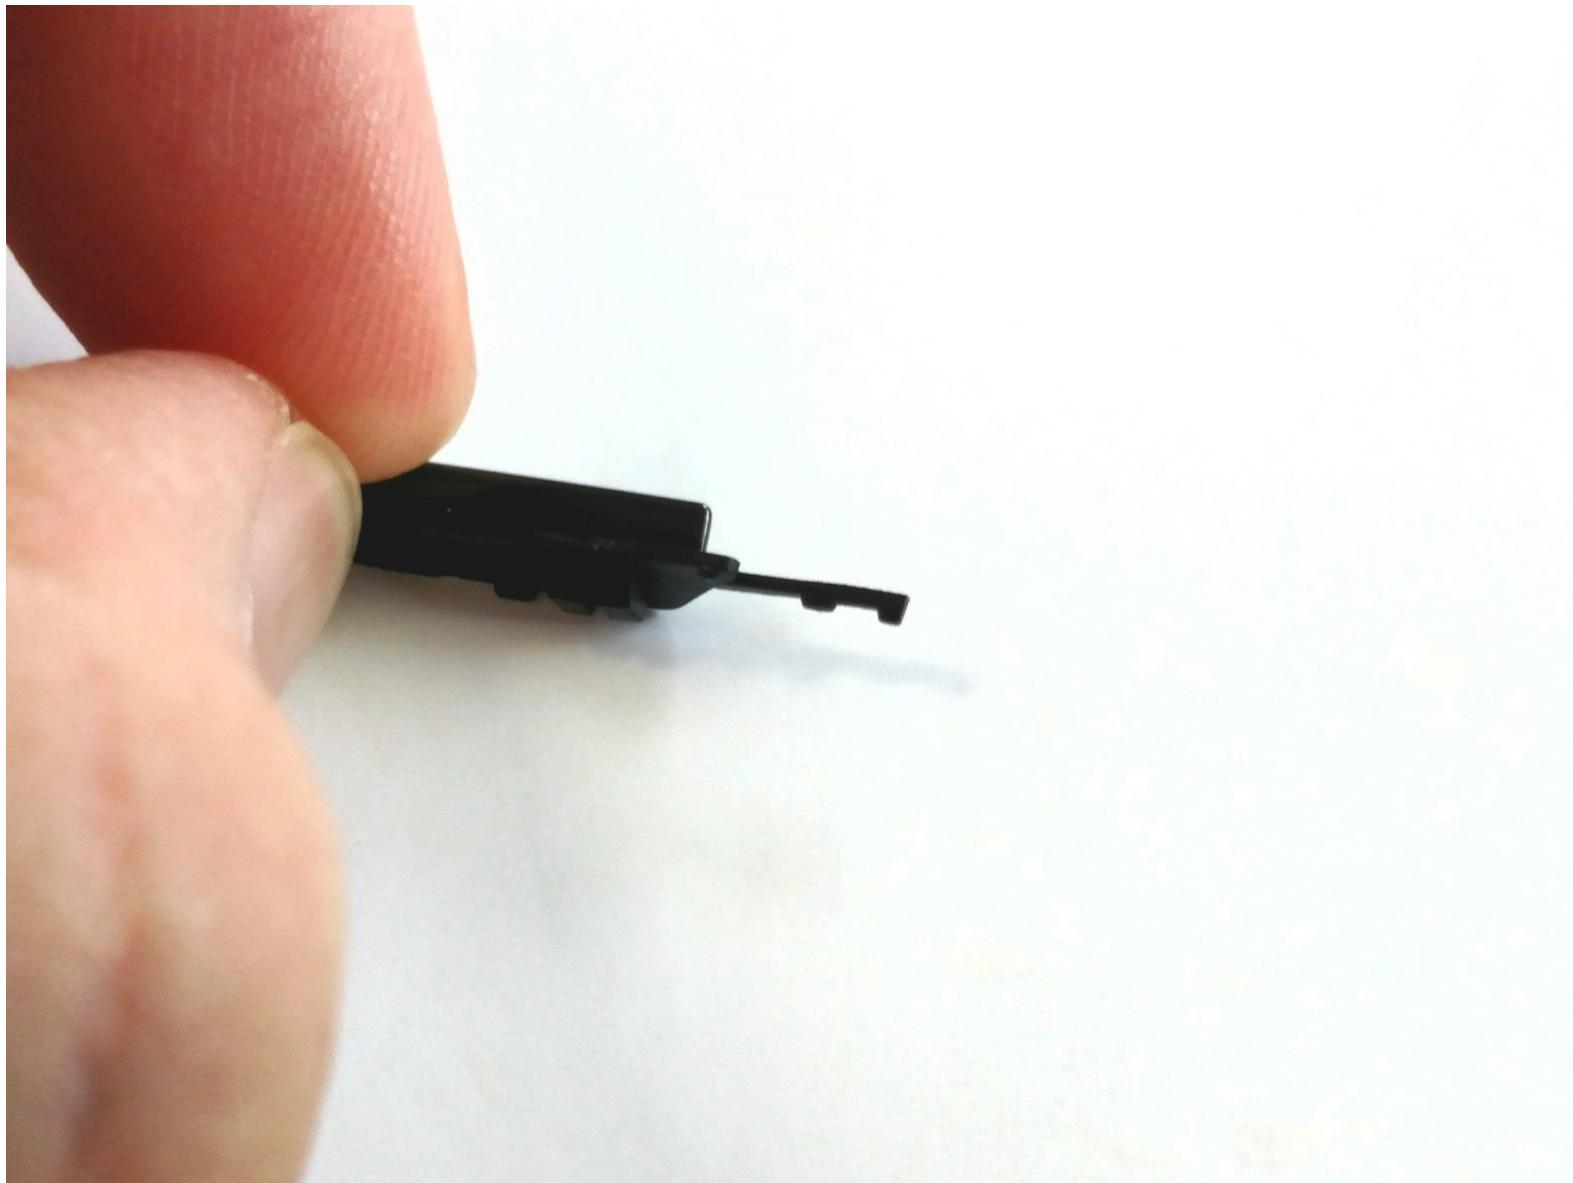

INTRODUCTION

This guide will allow the users of the Samsung Galaxy S Blaze to properly replace the volume rocker. The replacement of the volume rocker is an easy process with no surprises. Be careful while handling the screws for the phone, the screws will damage easily.

TOOLS:

- [Phillips #00 Screwdriver](#) (1)
- [iFixit Opening Tools](#) (1)
- [Spudger](#) (1)

Step 1 — Volume Rocker




- Remove the back plate to expose the battery.

Step 2



- Remove the battery from the device.


Step 3

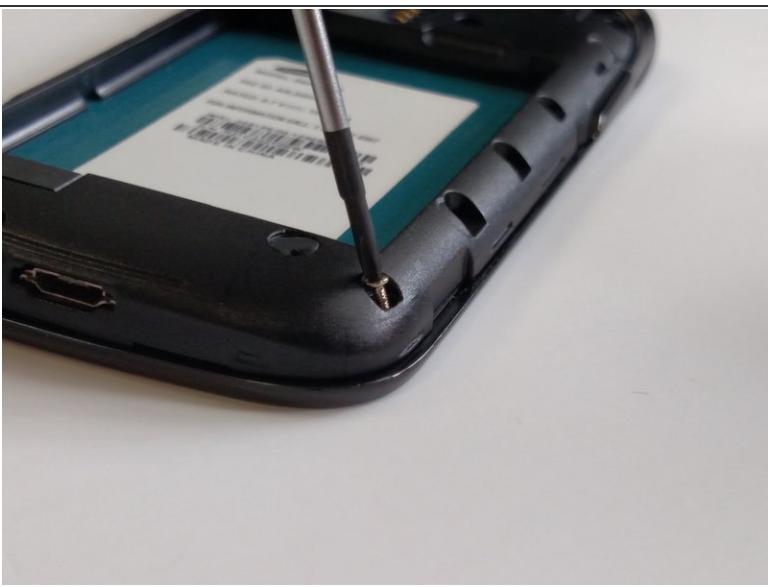

- Use a Phillips head screwdriver size 00.
- Remove the 4mm screws from the frame.

(i) The eight screws are all the same size.


Step 4

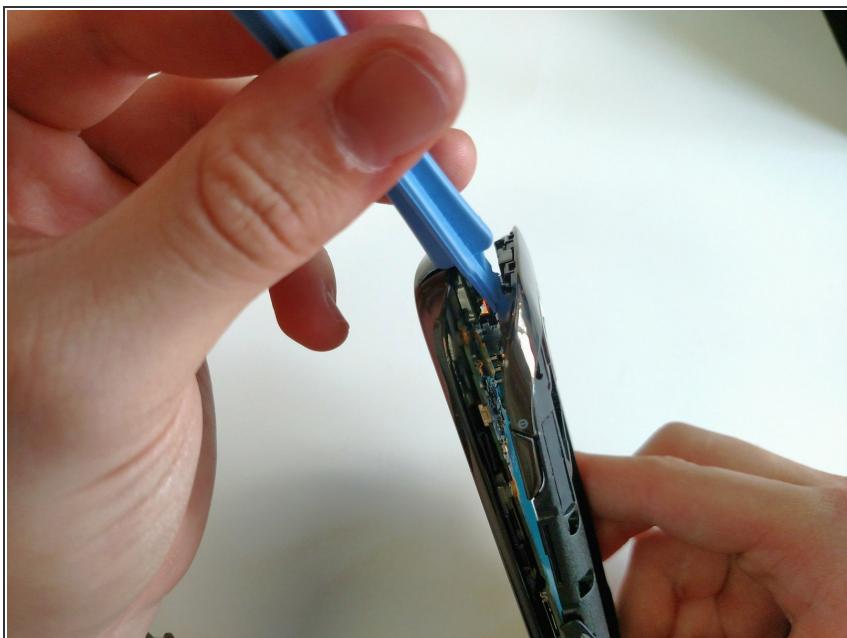

- Remove the frame from the phone by prying it off with the blue plastic opening tool.
- Work around the phone with the tool until the frame is off.

(i) You may need to use a bit of force to pry off the frame.

Step 5

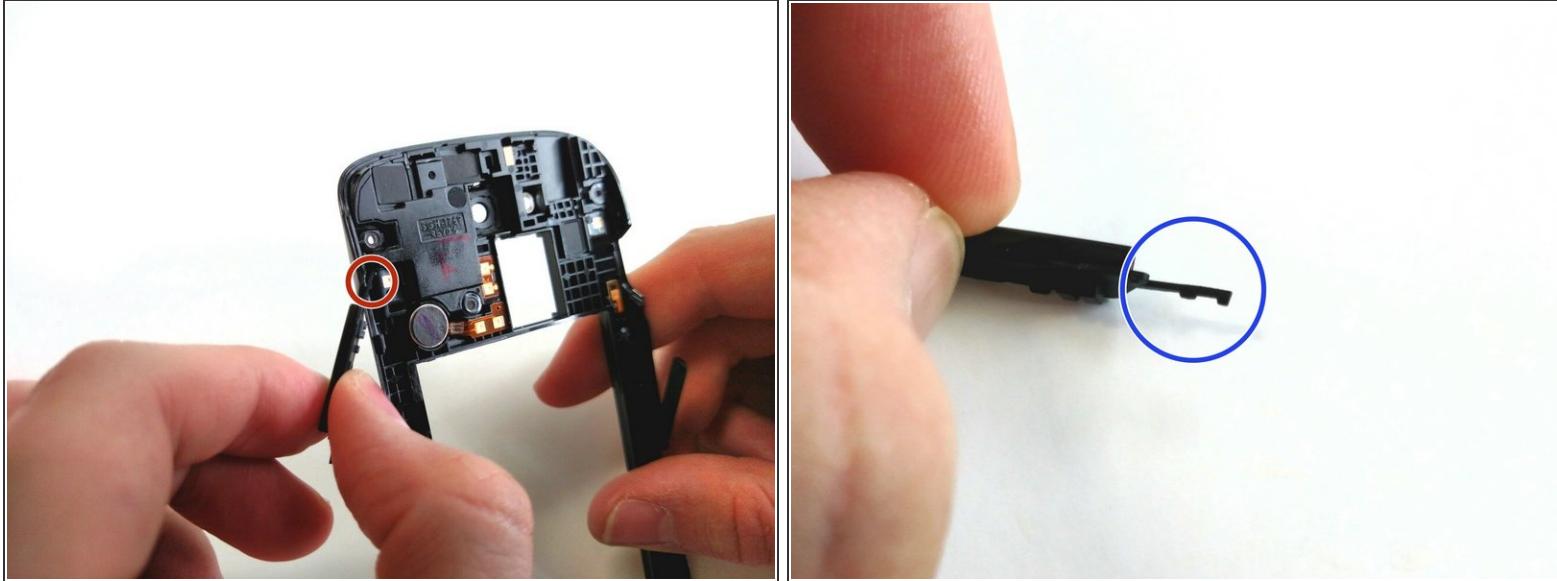

(i) The volume rocker is held into the frame by two small prongs.

- Carefully unhook the prongs from the frame and remove the volume rocker.
- The prongs on the volume rocker look like this.

To reassemble your device, follow these instructions in reverse order.

If there is something wrong with your device, try this: [Samsung Galaxy S Blaze 4G Troubleshooting](#)