




# Samsung Galaxy S5 Mini SIM & SD card reader Replacement

Written By: Sophia

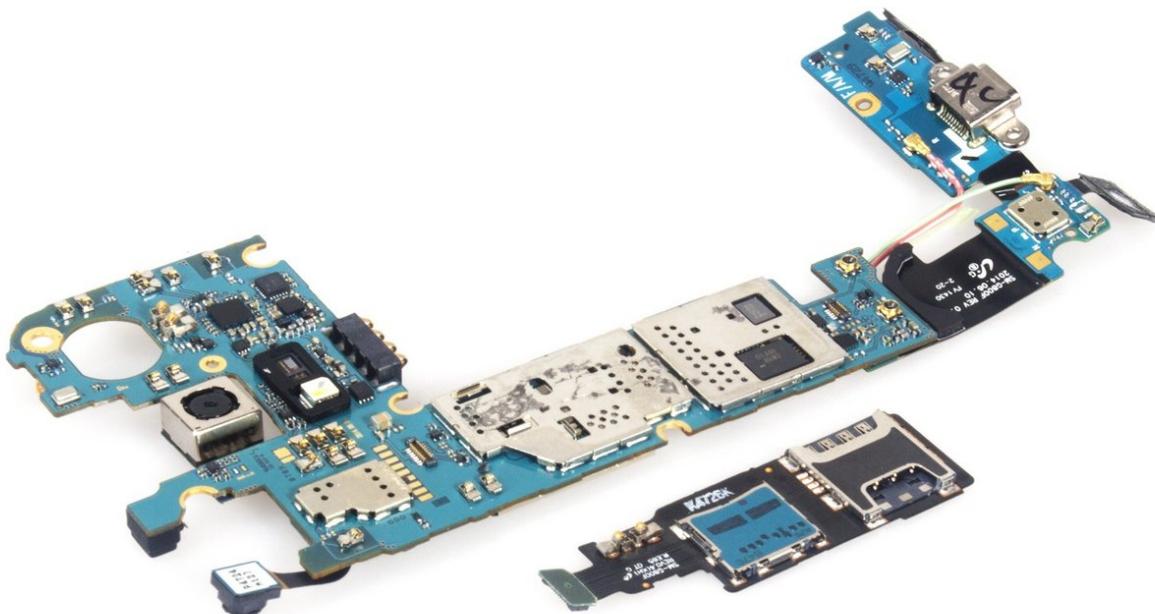

 **TOOLS:**

- Heat Gun (1)
- Phillips #00 Screwdriver (1)
- iFixit Opening Picks set of 6 (1)
- Spudger (1)

 **PARTS:**

- Samsung Galaxy S5 Mini SIM & SD card reader (1)

## Step 1 — SIM & SD card reader



- Remove back cover.

## Step 2



- Remove battery. If you have SIM card and SD card in, remove them by the way.

## Step 3



- Open this cover and release the home button flex connector.

## Step 4



- Heat the screen, cut the sticker under it and release the screen connector. Please be careful with the screen flex when sliding to cut the sticker.

## Step 5




- Remove the LCD screen from rear case.

## Step 6




- Remove all the screws.

## Step 7

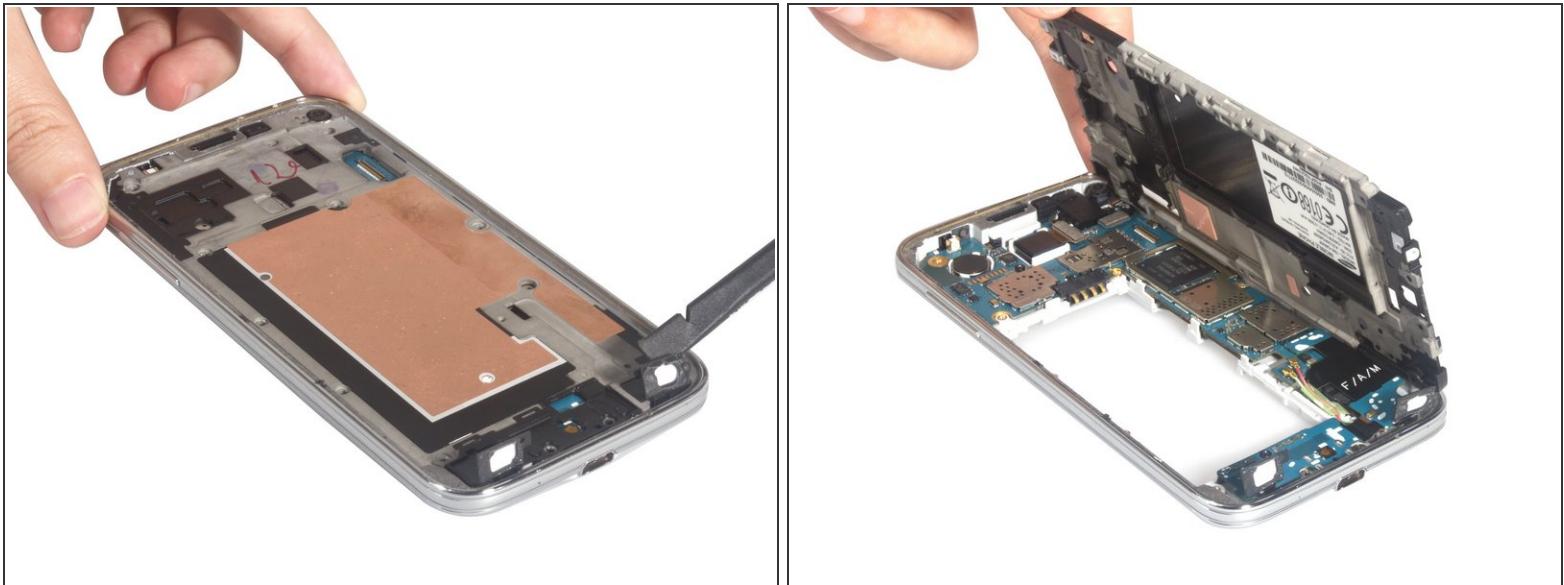


- Get loosen the touch keys from adhesive, and then push the mid-plate out from the middle housing.

## Step 8

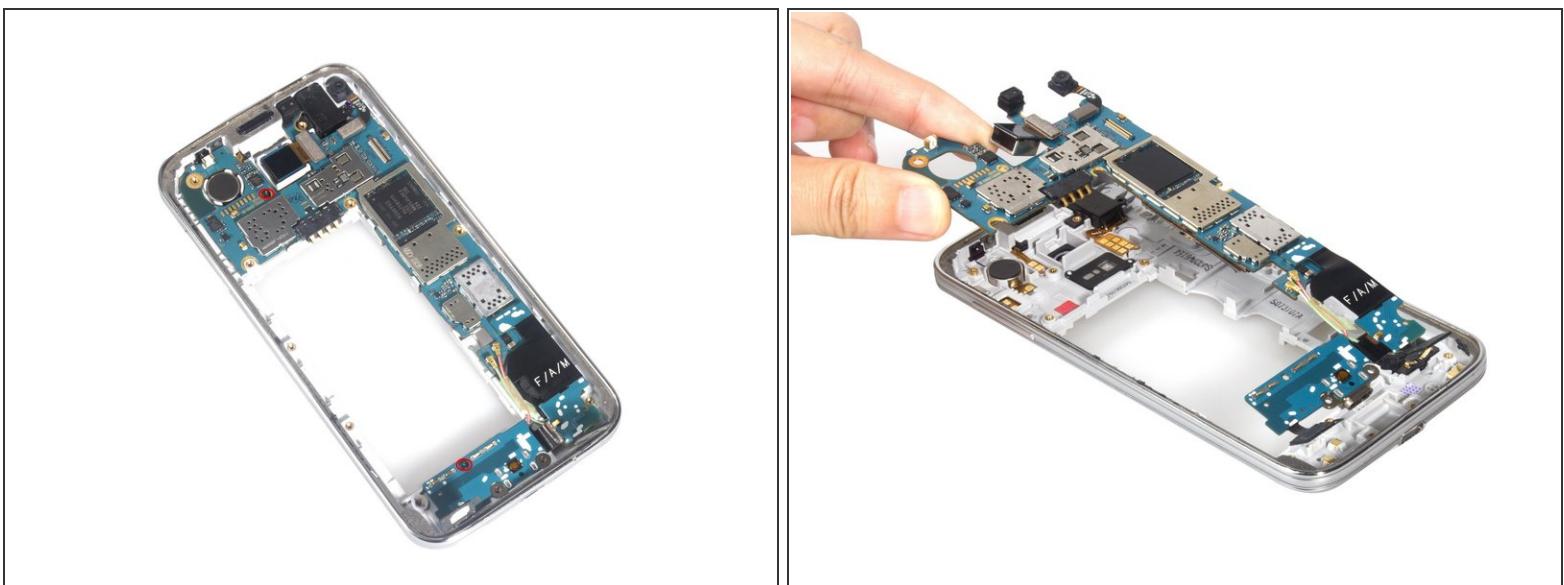

- Twist off these two screws and remove the whole motherboard assembly.

## Step 9

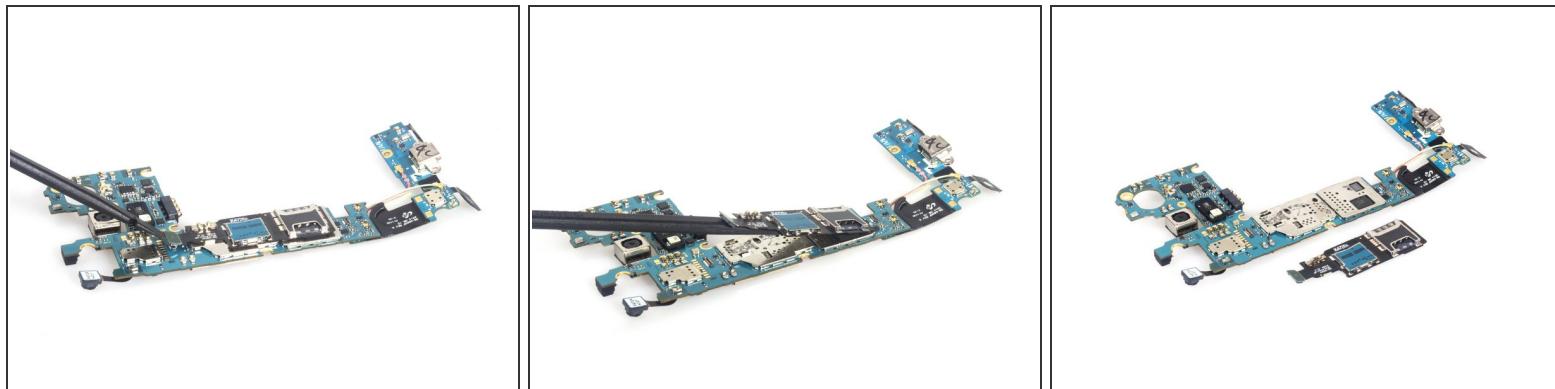

- Release the connector, loose the assembly from adhesive and remove it finally.

To reassemble your device, follow these instructions in reverse order.