



# Samsung Galaxy S7 Active Screen Replacement

How to replace a Samsung Galaxy S7 Active screen.

Written By: Erick Vazquez



## INTRODUCTION

This guide will teach you how to pry open your screen through the front side of the phone.

### TOOLS:

- Metal Spudger (1)
- Tweezers (1)
- Heat Gun (1)

### PARTS:

- Samsung Galaxy S7 Active Screen (1)

## Step 1 — Samsung Galaxy S7 Active Disassembly



- Melt the adhesive on the screen by applying a blow dryer directly on the screen.

 Your phone is hot, please do not touch it with your bare hand.

## Step 2



- Wedge the metal spudger in between the screen and the frame to begin separating them.
-  It would be easier to separate the screen from the sealing adhesive on the frame if you use more than one metal spudger.
-  Your phone might no longer be watertight after you reassemble it.

## Step 3



- Slide the metal spudger around the phone at least once.


*(i)* It would be easier to slide your metal spudger if you apply the blow dryer to where you are currently sliding.

## Step 4




- Lift the screen up with your hands.
- ⚠** Please wash your hands thoroughly with hot water and soap after you finish.

## Step 5 — Screen

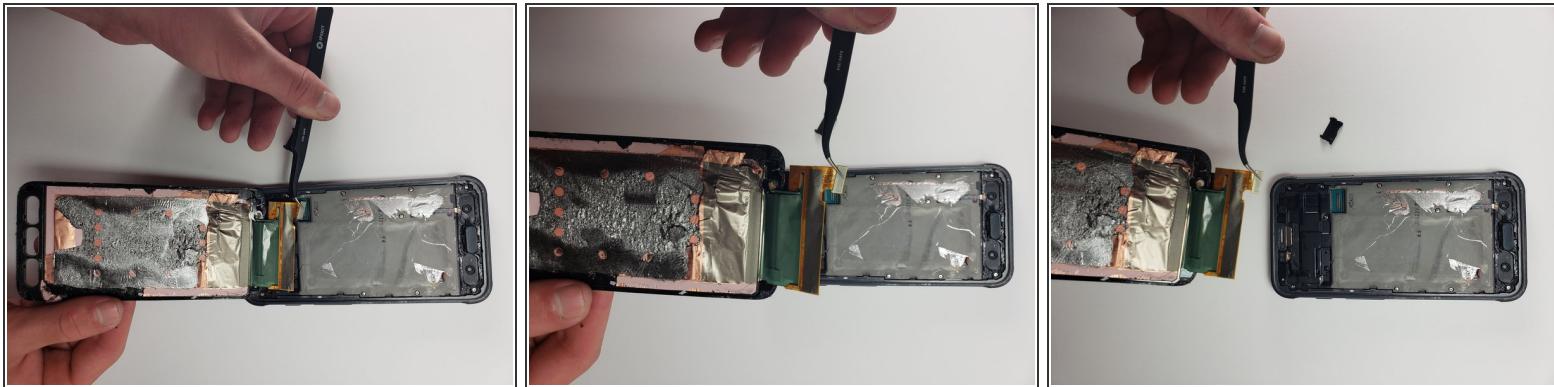

- Use the tweezers to disconnect the screen from the phone by detaching the connection.

## Step 6

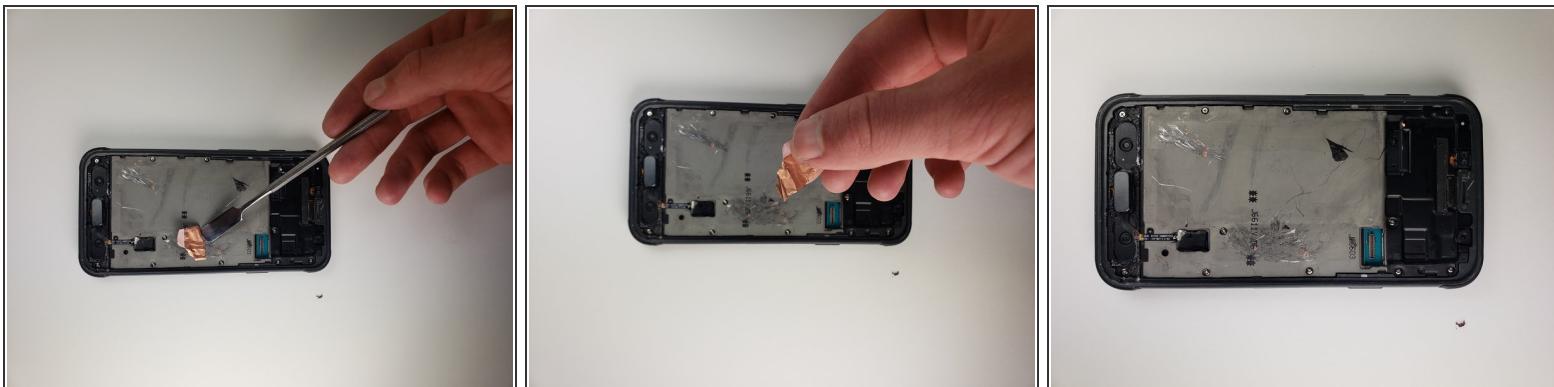

- Clean the rest of the adhesive left on the phone by scraping it off with a metal tool.
- Apply rubbing alcohol on the adhesive to make sure phone is free of any adhesive. Do this by applying some rubbing alcohol onto a napkin.
- Lightly proceed to clean the phone with that napkin.

To reassemble your device, follow these instructions in reverse order.