



# Samsung Galaxy Tab 3 7.0 Teardown

Taking the motherboard out

Written By: Jordan Senimanora




## INTRODUCTION

We are going to teach u guys how to open up and take out the motherboard

### TOOLS:

- screwdriver and mini prybar (1)

## Step 1 — Samsung Galaxy Tab 3 7.0 Teardown

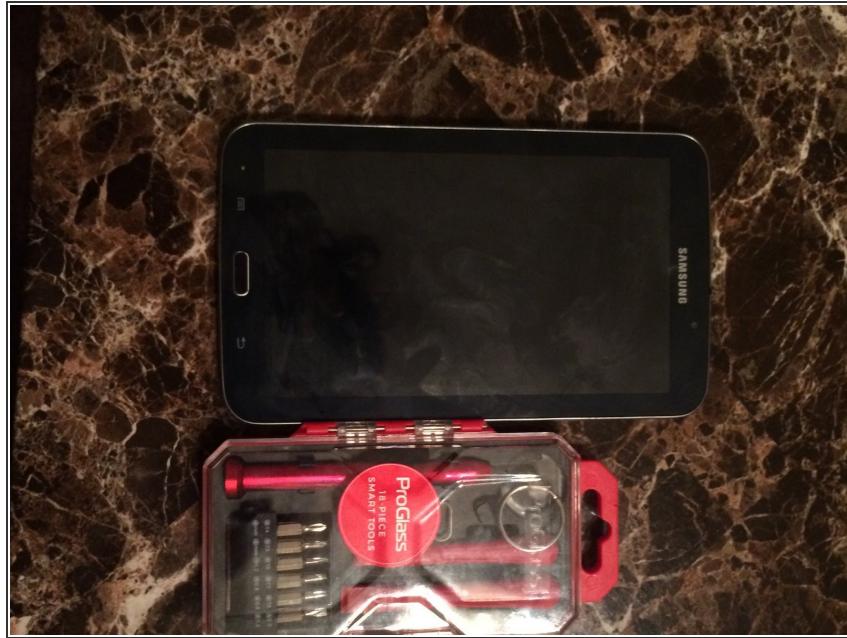


- Make sure u have the essential tools need(Bought this toolkit for 10 dollars at walmart)

## Step 2



- Take off the micro sd card cover

## Step 3

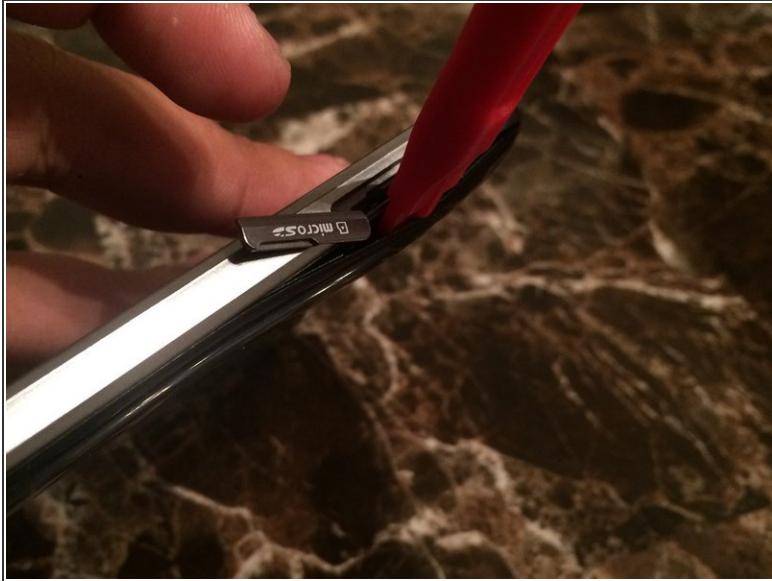


- use the mini pry bar
- Shove into the lining between the back and the micro sd card.
- When its wedged push it all around the sides

## Step 4




- Now that the back is out you are looking at the insides

## Step 5

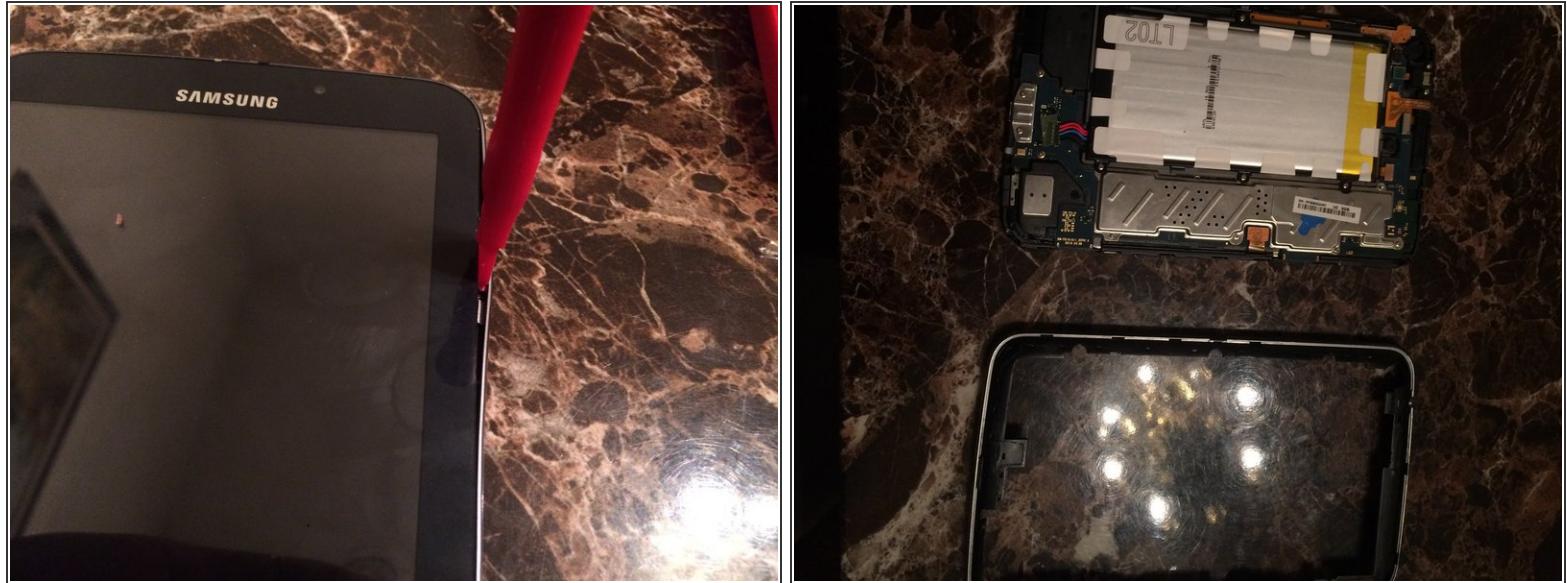


- turn it around then insert the mini pry bar between the screen and the silver border and slide the pry bar around all sides until the silver lining is popping off the screen

## Step 6

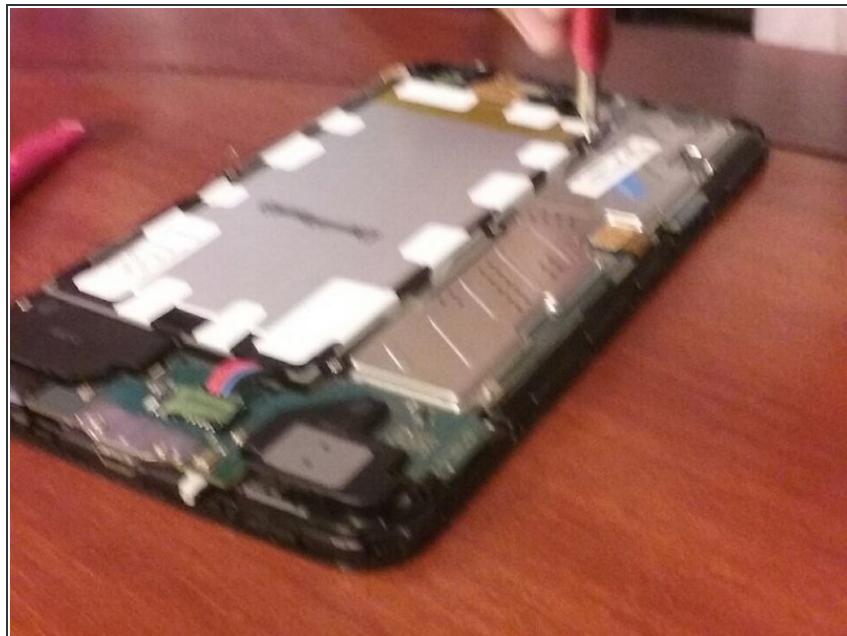

- unscrew the screws around the battery

## Step 7

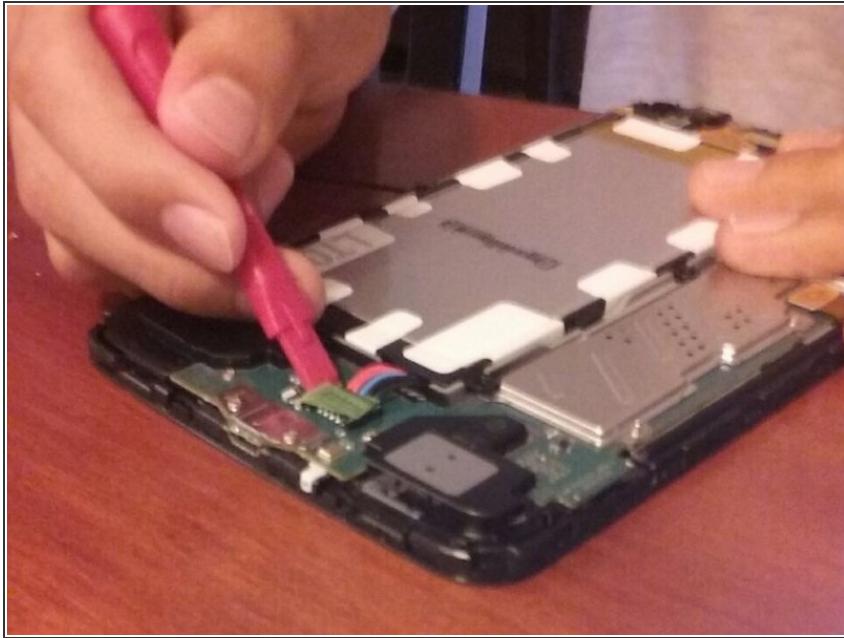

- Now take out the connectors (all of them)

## Step 8



- now take out all the screws that are all around the edges
- than you will see that you can just pull the motherboard out