




Samsung Galaxy Tab 3 8.0 Charging Port Replacement

If the device will not charge despite a power cable and battery replacement, replacing this component is the likely solution.

Written By: Peter Paoletta

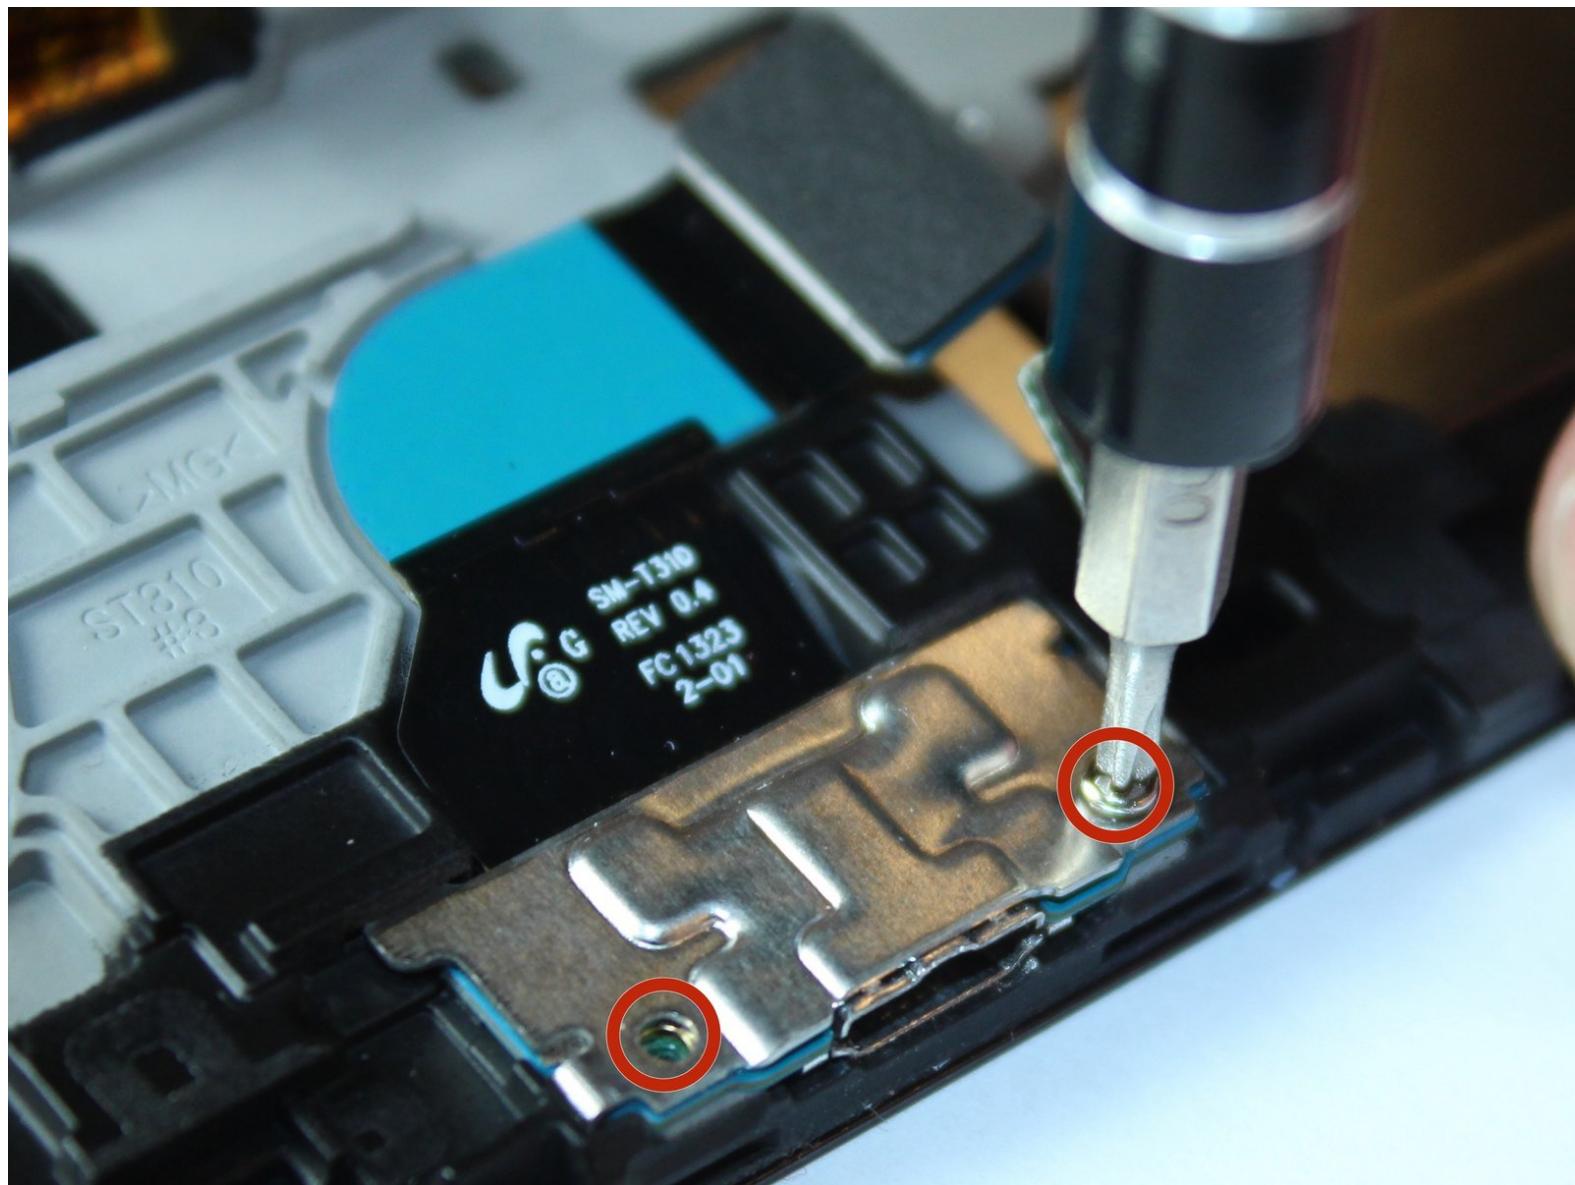


 **TOOLS:**

- iFixit Opening Tools (1)
- Tweezers (1)
- Phillips #000 Screwdriver (1)

 **PARTS:**

- Galaxy Tab 3 8" Wi-Fi Charging Assembly (1)
- Samsung Galaxy Tab 3 8.0 Replacement Charging Port (1)



Step 1 — Battery - Open up the tablet

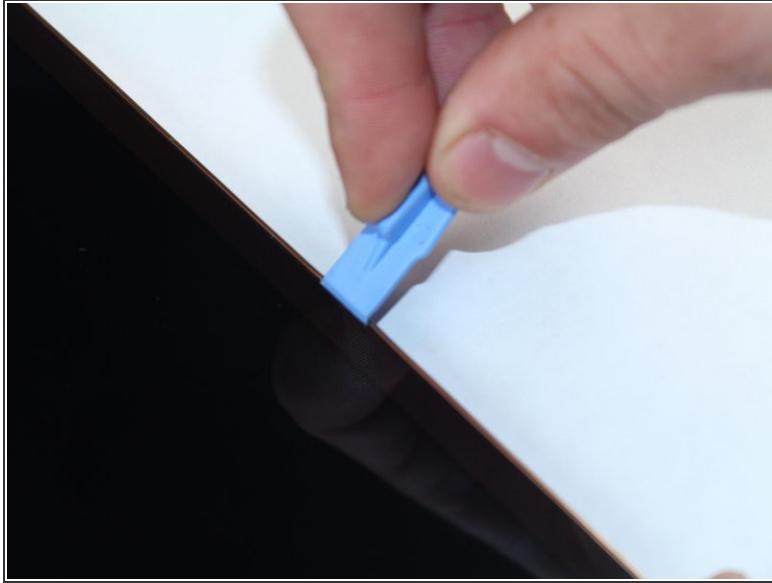

- Start out by separating the screen from the back cover using the larger plastic opening tool to pry them apart.



 Be careful when removing the screen as negligence can cause damage.

Step 2 — Remove Back Cover

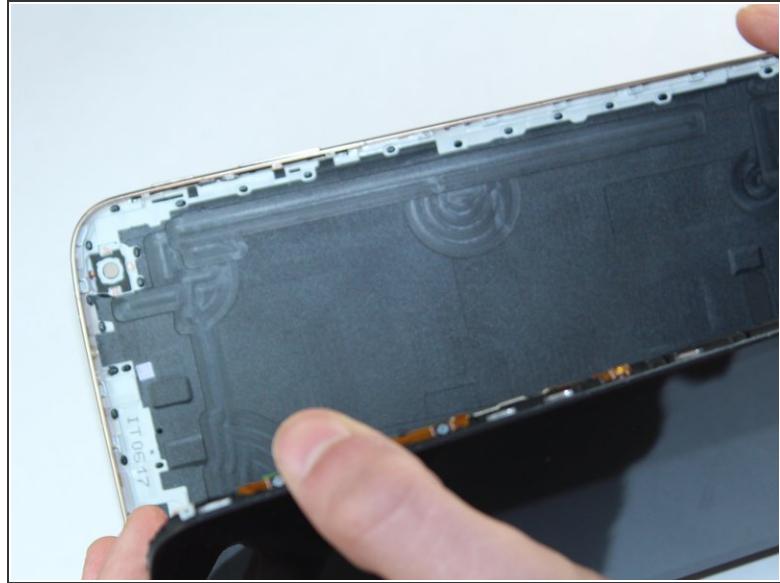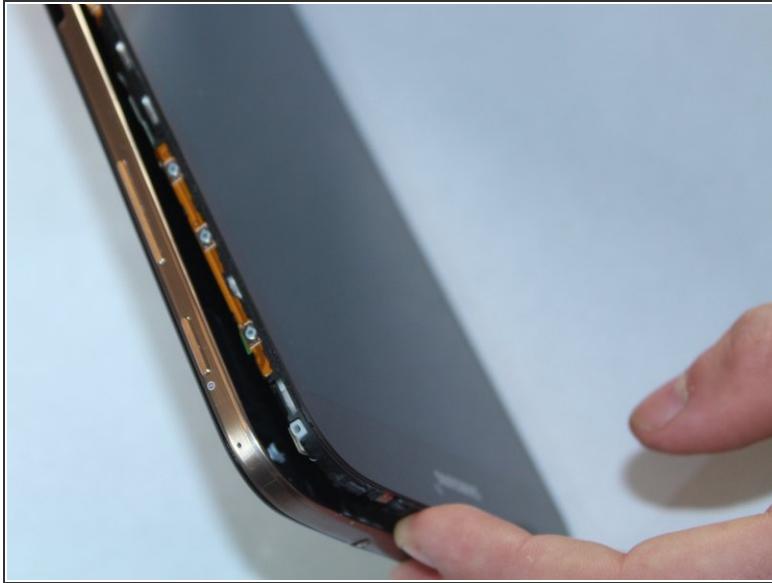

- Once every part of the screen is separated from the back cover, you should be able to fully remove it with your hands.

Step 3 — Disconnect Battery

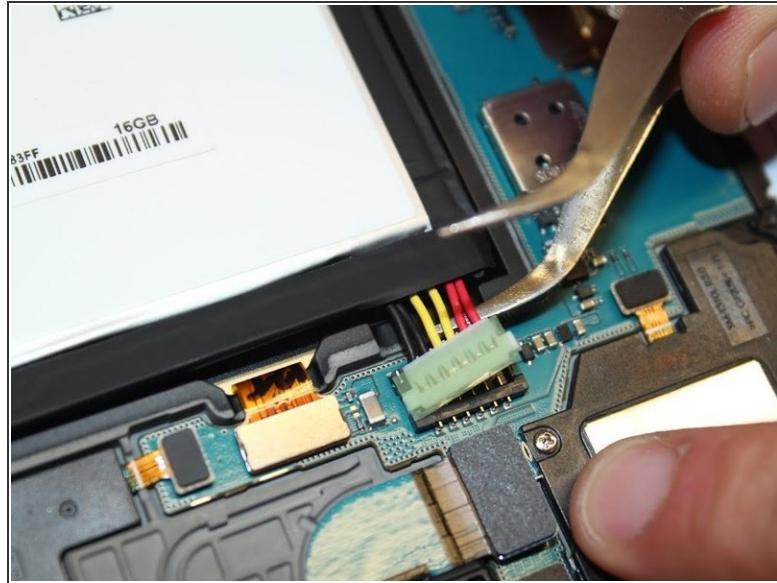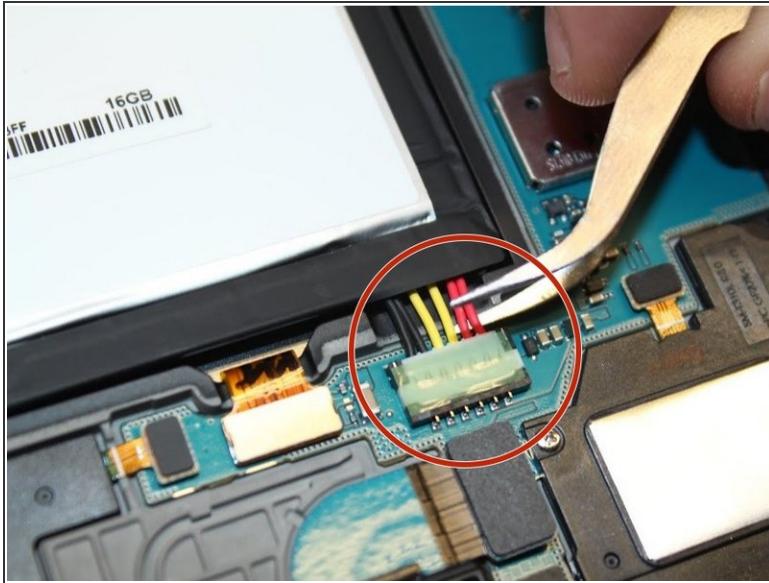

- To remove the battery you must use something small, such as tweezers, to disconnect the battery from its port.




(i) Note: the connection lifts up to remove.

Step 4 — Remove Battery



- After the battery is disconnected, use the pulling tab to safely remove the battery.

Step 5 — Unscrew Charging Port

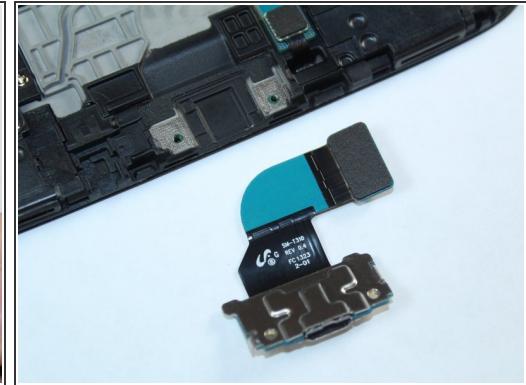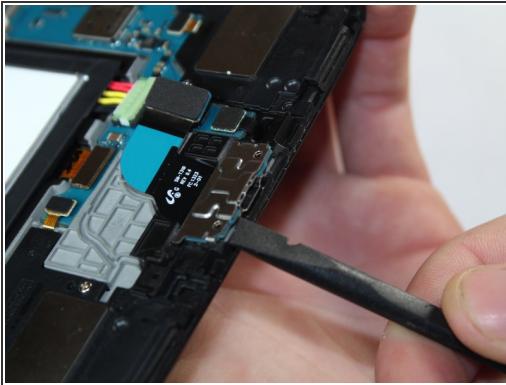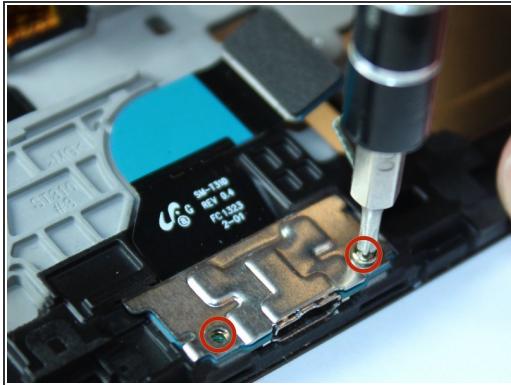

- Unscrew the 2.9mm screws from the charging port with Phillips Head #000 and use the spudger to pry it up from under the port to remove component from the device.

To reassemble your device, follow these instructions in reverse order.