



Samsung Galaxy Tab 3 Kids Motherboard Replacement

If your phone has problems turning on or not working due to shock or water damage the mother board might be broken. Follow this guide to remove the mother board.


Written By: ajhoffman



 **TOOLS:**


- [iFixit Opening Tools \(1\)](#)
- [Phillips #000 Screwdriver \(1\)](#)

Step 1 — Motherboard

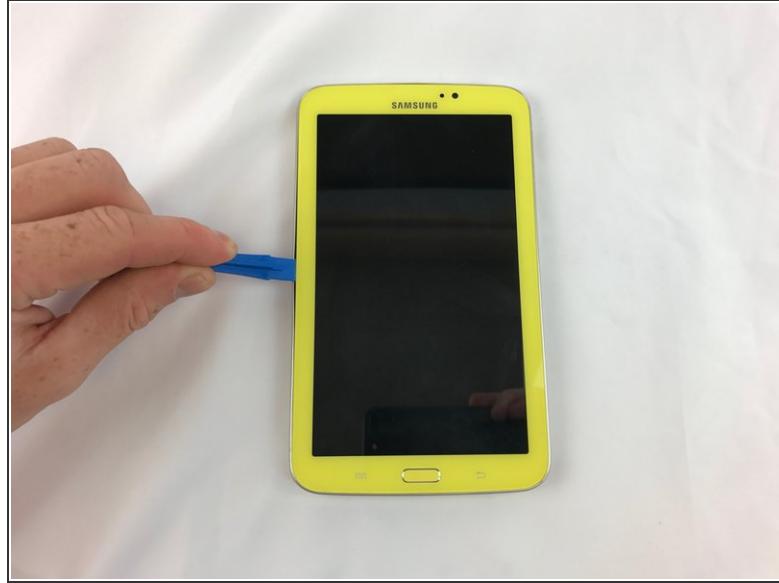


- Using the plastic opening tool to open up the device, wedge in the seam between the screen and the back cover. Slide the tool around all the edges and remove the screen from the back cover.

Step 2

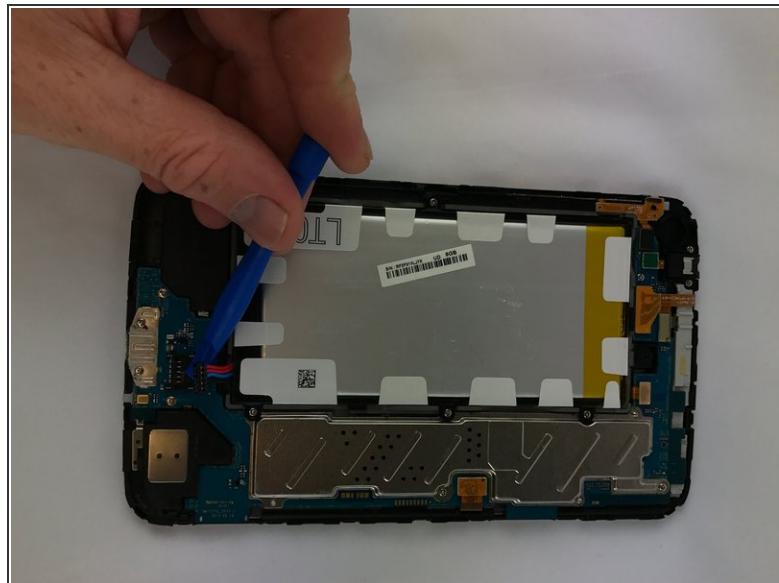

- Unplug the battery connection carefully using the plastic opening tool.

Step 3

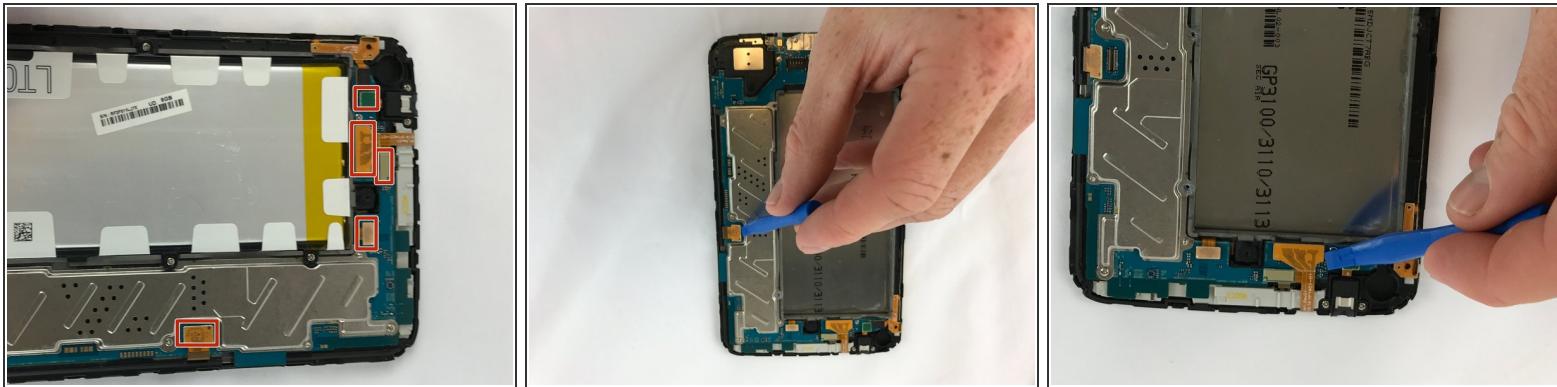

- Disconnect all the flex cables from the motherboard by prying the connectors straight up.

Step 4



- Remove the ten 4 mm PH000 screws securing the motherboard.

Step 5



- Remove the mother board from the device by carefully lifting it out.

To reassemble your device, follow these instructions in reverse order.