




Samsung Galaxy Tab E 9.6 Verizon Back Camera Replacement

Replace your back camera to have one clear photograph.

Written By: Tingting Liu

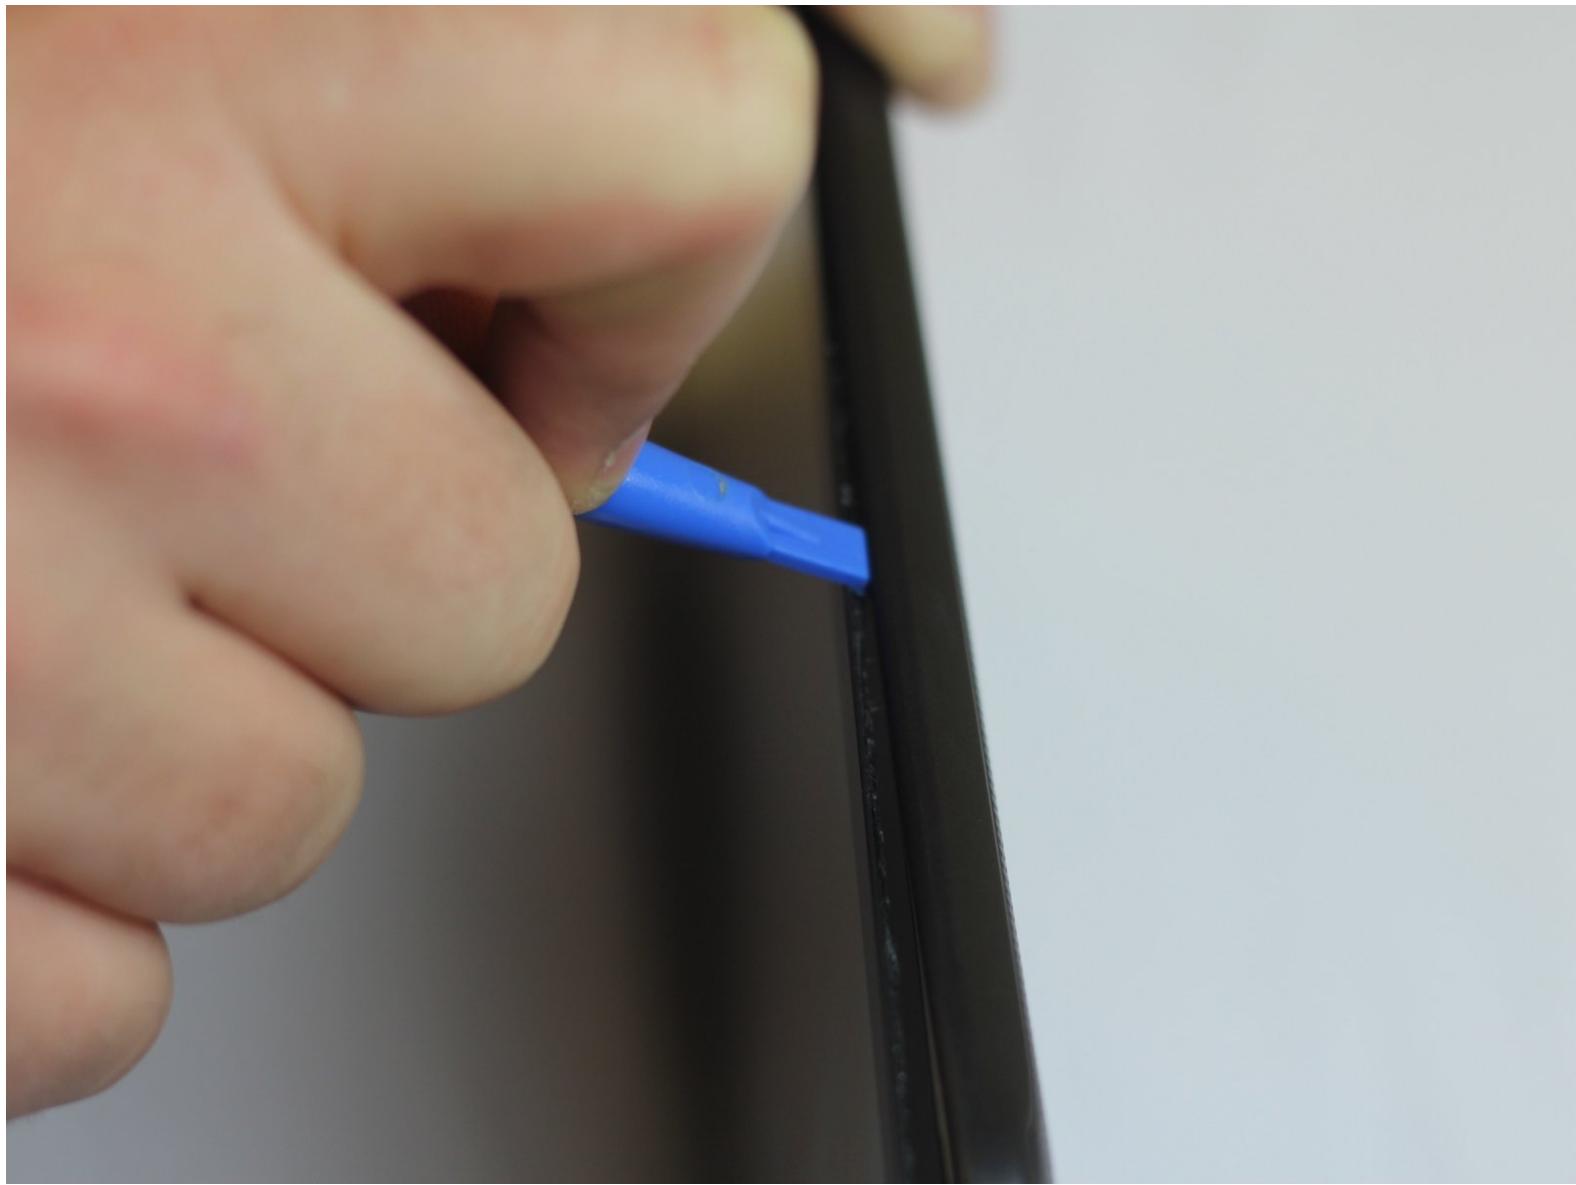


INTRODUCTION

The camera in a phone or a tablet is easy to damage if it is dropped. So this guide highlights how to remove the back cover of the tablet in order to replace the back camera.

TOOLS:

- [iFixit Opening Tools](#) (1)
- [Tweezers](#) (1)
- [Suction Handle](#) (1)

Step 1 — Back Camera

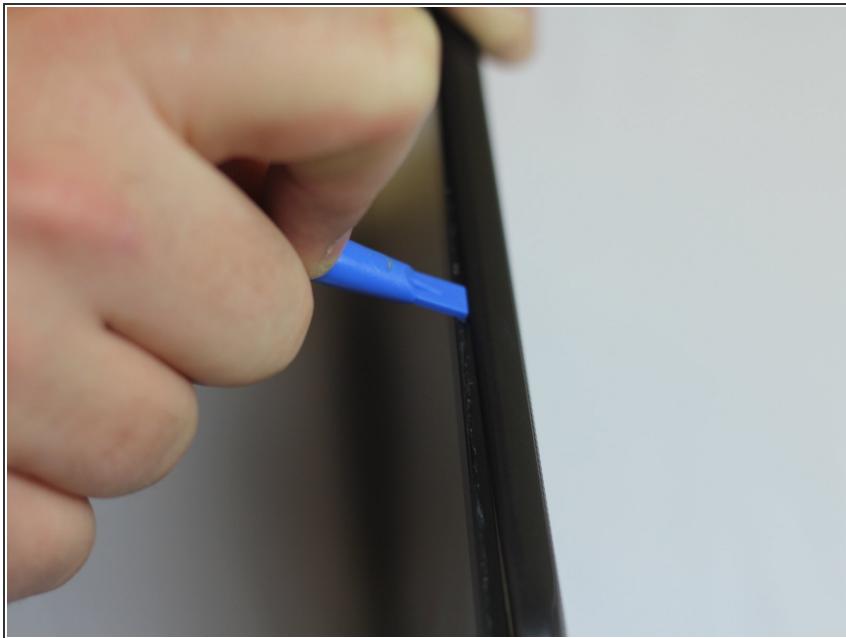


! Make sure the device is turned off.

- Using the plastic opening tool, start in the center and wedge the angled tip between the plastic back and the screen.
- Try to pressure it, wedge it back and forth.



! Do not wedge the plastic opening tool directly on top of the power buttons and headphone buttons.

Step 2

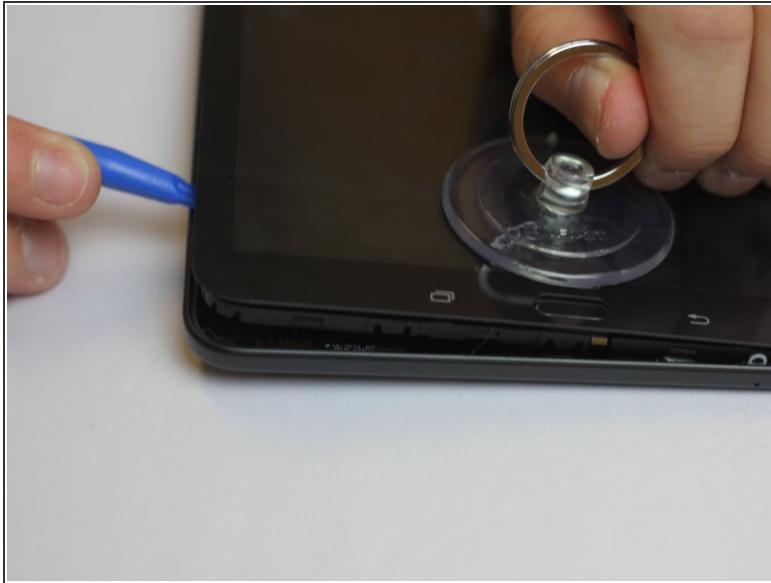



- Once the bottom edge has been loosened, use the suction tool to pull it.
- The second picture shows the internal portion of the tablet once the back cover is removed.

Step 3

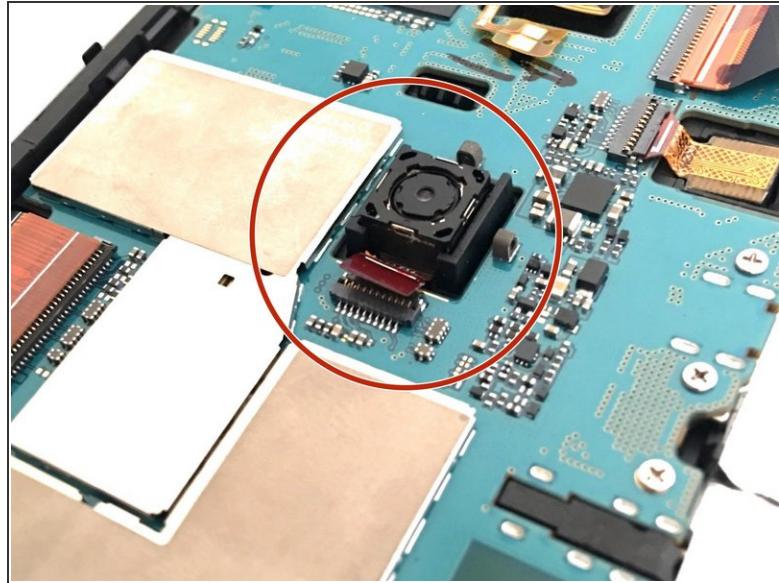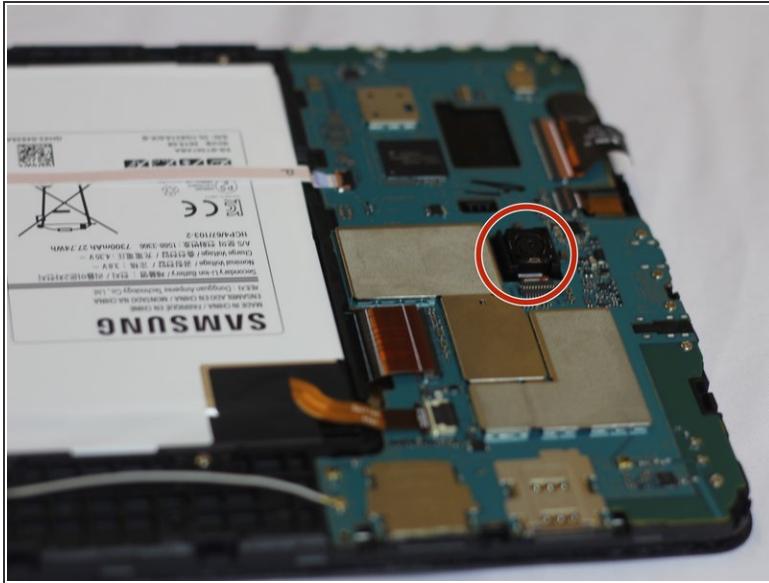

- The first picture shows the location of back camera.
- Disconnect the rectangular connection from the back camera to the motherboard.

Step 4

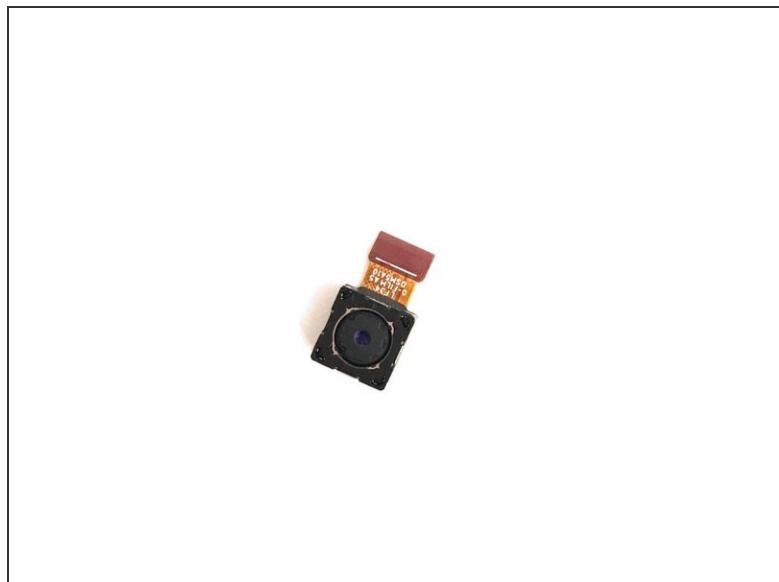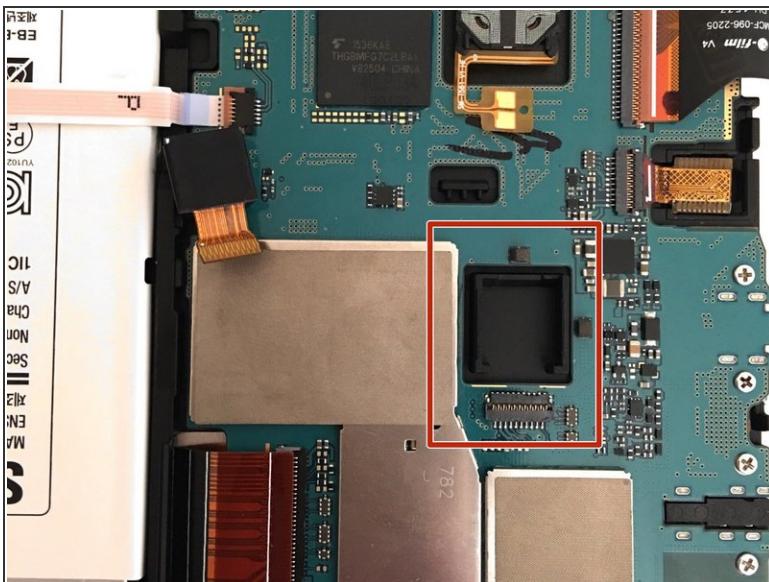

- The picture illustrates what the device should look like once the back camera is removed.

To reassemble your device, follow these instructions in reverse order.