




# Samsung Galaxy Tab S2 8.0 Battery Replacement

This guide will direct you through the steps of replacing your battery in your Samsung Galaxy Tab S2 8.0.

Written By: Jonathan Wood

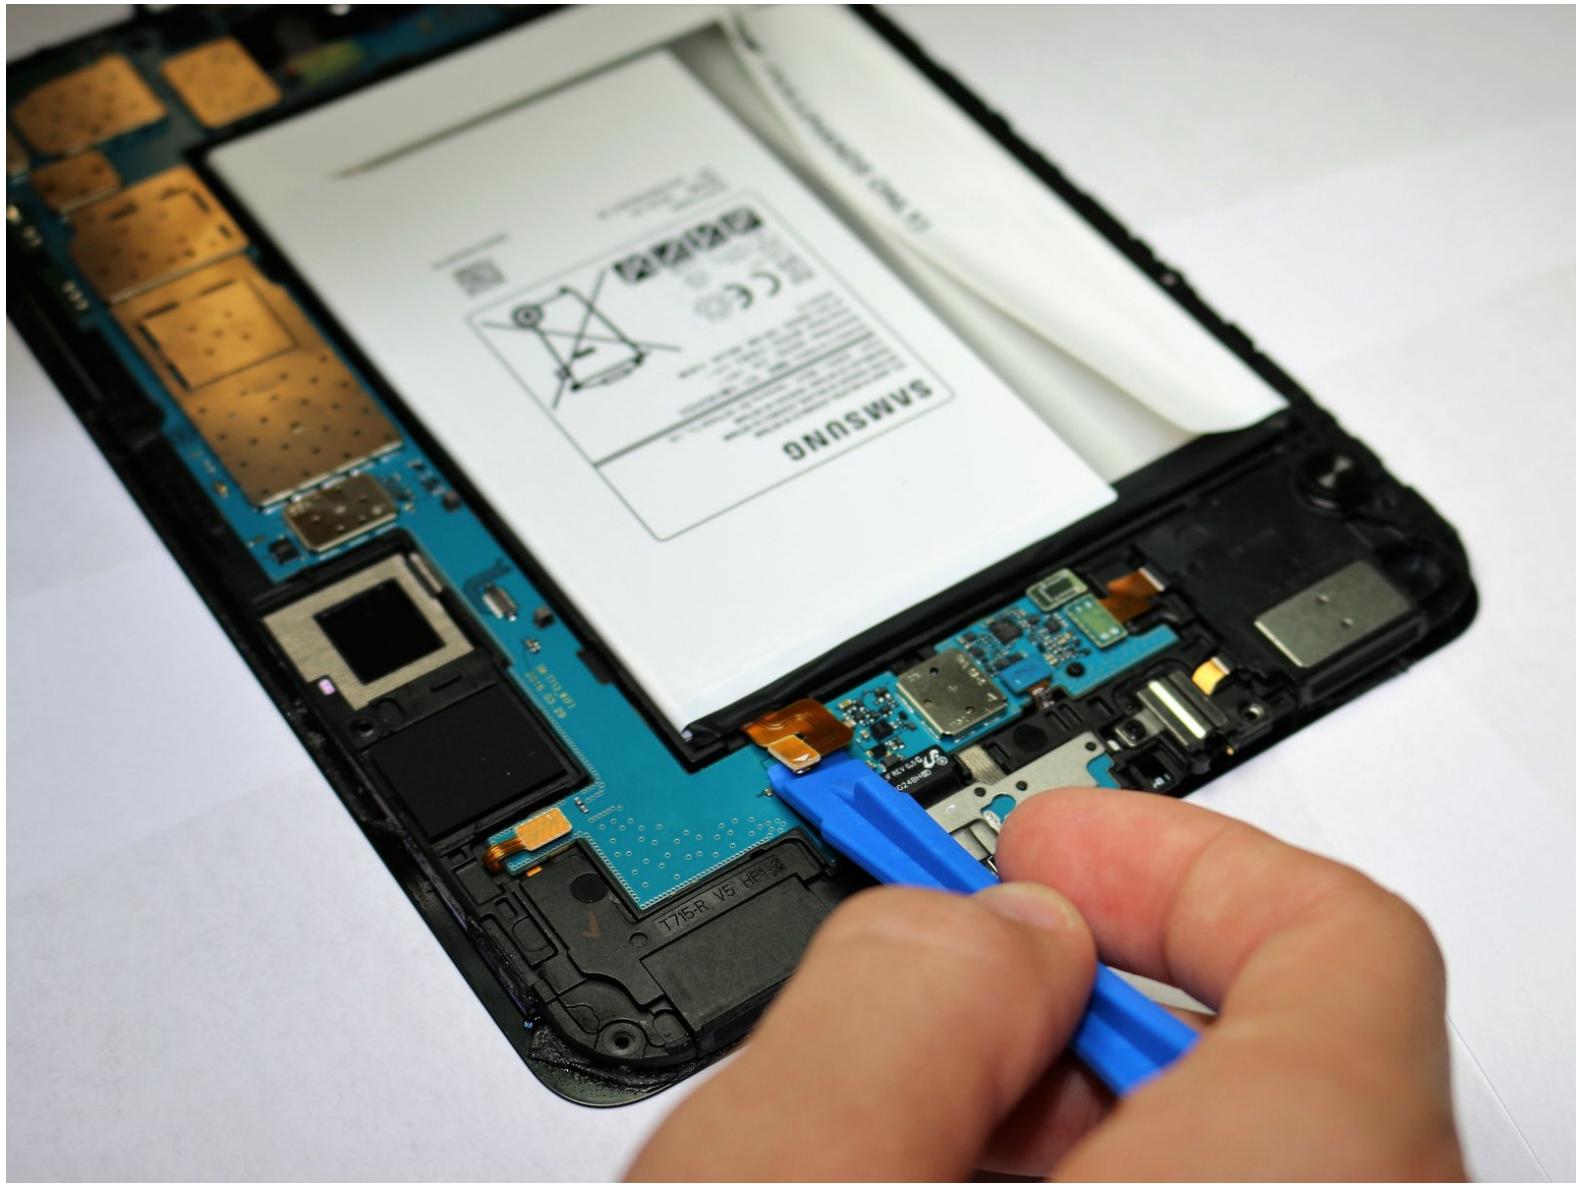

This document was generated on 2019-09-29 02:20:48 AM (MST).

## INTRODUCTION

If the tablet is not staying on unless plugged in, replacing the battery should solve the problem.

### TOOLS:

- Suction Handle (1)
- iFixit Opening Tools (1)
- iFixit Opening Picks set of 6 (1)
- iFixit iOpener (1)
- Phillips #1 Screwdriver (1)

### PARTS:

- Samsung Galaxy Tab S2 8.0 Battery (1)

## Step 1 — Screen



**⚠** Working on a device that is turned on may yield an electric shock. Make sure your device is turned off before working on it.

- Apply heat using an iFixit iOpener or another heating gun in order to weaken the adhesive around the edges of the screen.


## Step 2



- Insert the plastic opening tool into the gap between the screen and tablet in the location where you want to start removing the screen.
- Put an opening pick in the gap created, in between the screen and the panel.
- Repeat all around device, putting 2 picks on top and bottom, and one on each side.

This document was generated on 2019-09-29 02:20:48 AM (MST).

## Step 3

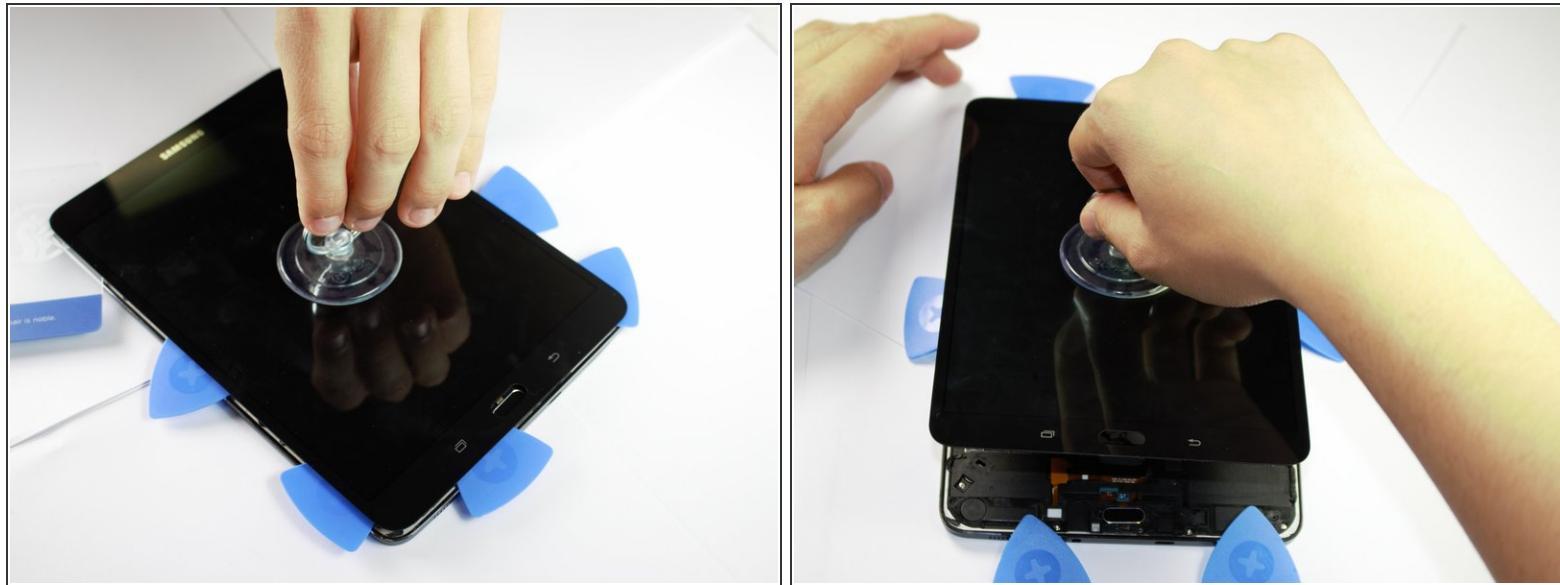

- Carefully remove the small suction cup from the corner without moving the screen.
- Place the small suction cup in the center of the screen and lift to remove screen.

**⚠** The screen is still connected to the rest of the device by a cable, so don't pull the screen up too quickly.

## Step 4



- Place the plastic opening tool underneath the ribbon cable connecting the screen to the tablet.
- Carefully lift the plastic opening tool to detach the ribbon from the tablet.


**⚠** Make sure to discharge any static electricity by touching a grounded metal object, like a quarter, before touching the inside of the device.

## Step 5



- The screen is now detached from the rest of the tablet.

## Step 6 — Battery

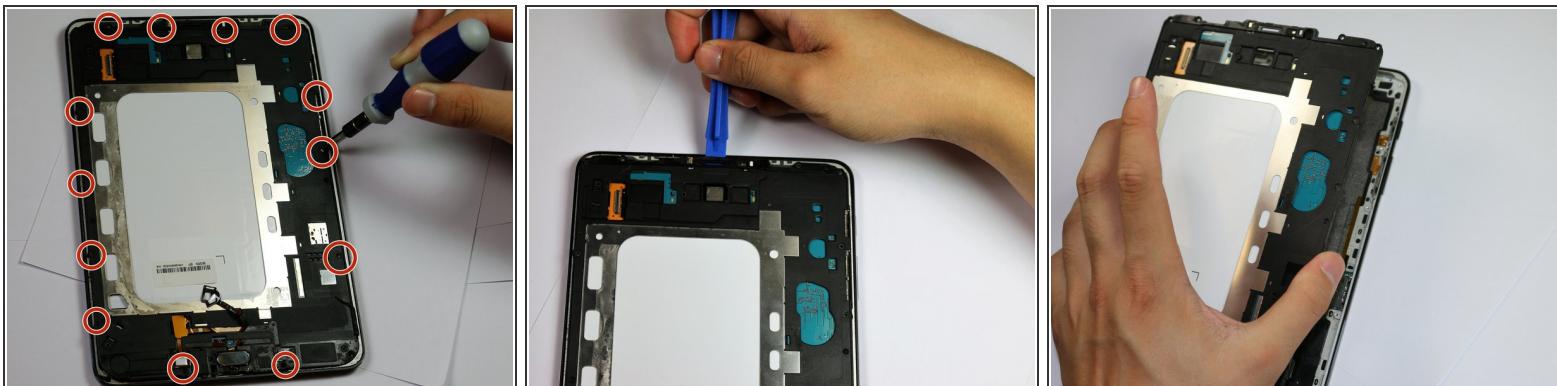


- Remove the 13 3mm screws from around the edges of the board using a Phillips #1 screwdriver head.
- Lift up and remove the panel of the board using a plastic opening tool.

## Step 7



- Remove the cable that connects the battery and device using the plastic opening tools.

## Step 8

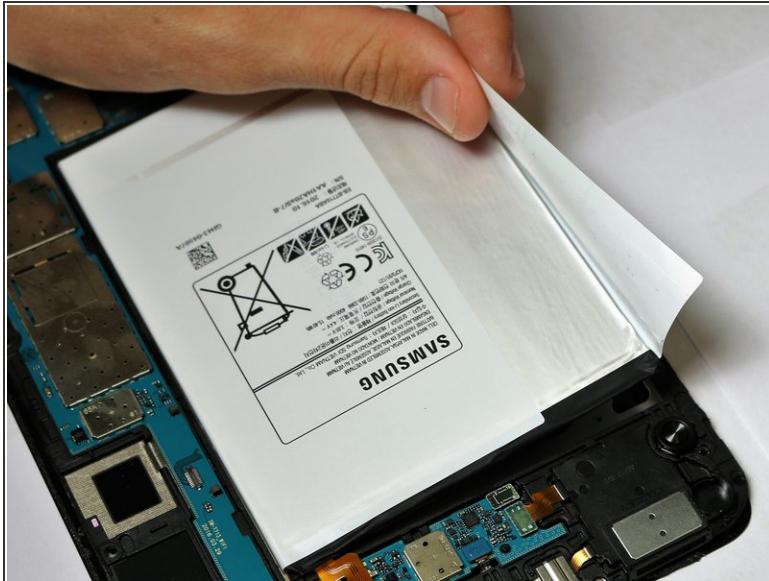

- You can now safely remove the battery from the device by lifting it from the paper flap.

To reassemble your device, follow these instructions in reverse order.