



Samsung Instinct Antenna Replacement

This guide shows how to take out the antenna so that a replacement can be installed.

Written By: Jimmy Kuo



INTRODUCTION

This guide shows how to take out the antenna so that a replacement can be installed.

TOOLS:

- [Phillips #00 Screwdriver](#) (1)
- [iFixit Opening Tools](#) (1)

Step 1 — Battery



- Apply pressure to the back cover and slide it forward towards the camera.
- Lift the back cover off the phone.

Step 2




- Holding the phone firmly, use the notches to grip and lift up the battery.

Step 3 — Back Case



- Remove the four 4.45mm screws at the corners of the phone.

Step 4

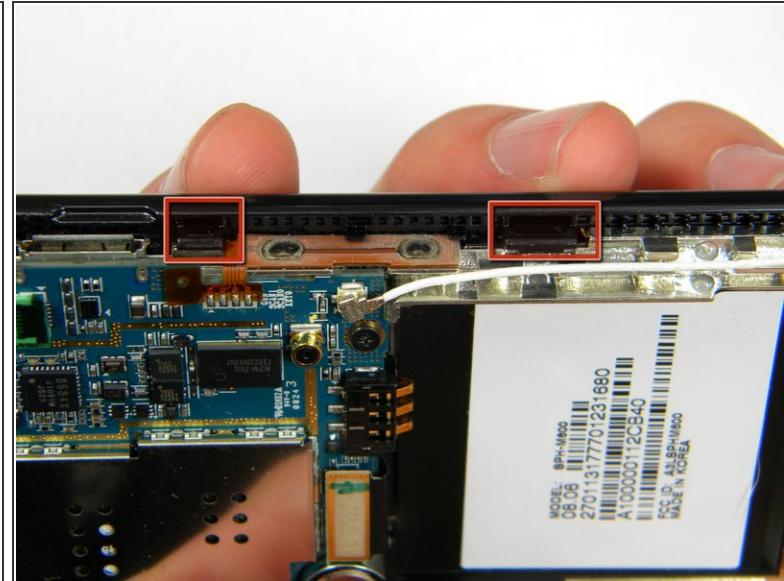

- Use the plastic opening tool to unhinge the locks around the edges of the phone.

(i) Do not worry about the inner components of the phone; they are not connected to this case.

Step 5




- Lift the casing off of the phone.

Step 6 — Antenna



- With the screws removed, locate the antenna.

Step 7

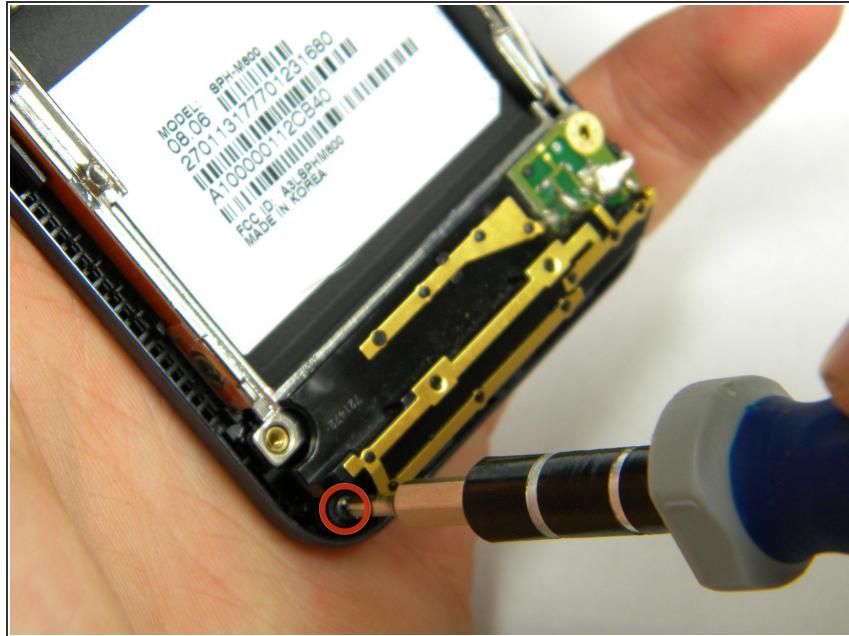

- Using a Phillips head screwdriver, remove the 4.50mm screw holding the antenna in place.

Step 8



- Using the plastic opener tool, squeeze gently on the antenna cable connector and lift to remove the connector from its position.

Step 9



- Gently lift up on the antenna and remove it from the back of the device.

To reassemble your device, follow these instructions in reverse order.