



# Samsung S85 Screen Replacement

This guide will explain how to successfully remove the screen underneath the outside shell and on top of the circuit board.

Written By: Avinash Salgam



## INTRODUCTION

This guide will explain how to successfully remove the screen underneath the outside shell and on top of the circuit board.

### **TOOLS:**


- [Tweezers](#) (1)
- [Phillips #00 Screwdriver](#) (1)

## Step 1 — Screen



- Remove 4 screws from bottom of camera
- Remove 2 screws from side of camera
- Remove 2 screws from side of camera
- ☒ Place Screws on magnetic surface or location where they will not roll away

## Step 2

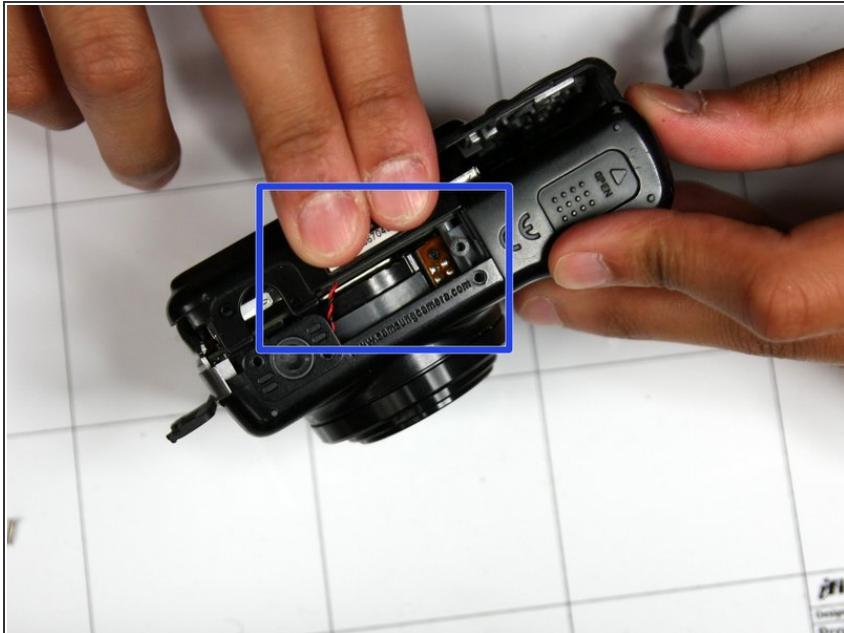


- Squeeze area noted by blue square and pull outside shell apart from remaining camera.

## Step 3



- Remove two screws holding screen to circuit board marked by red circles

## Step 4

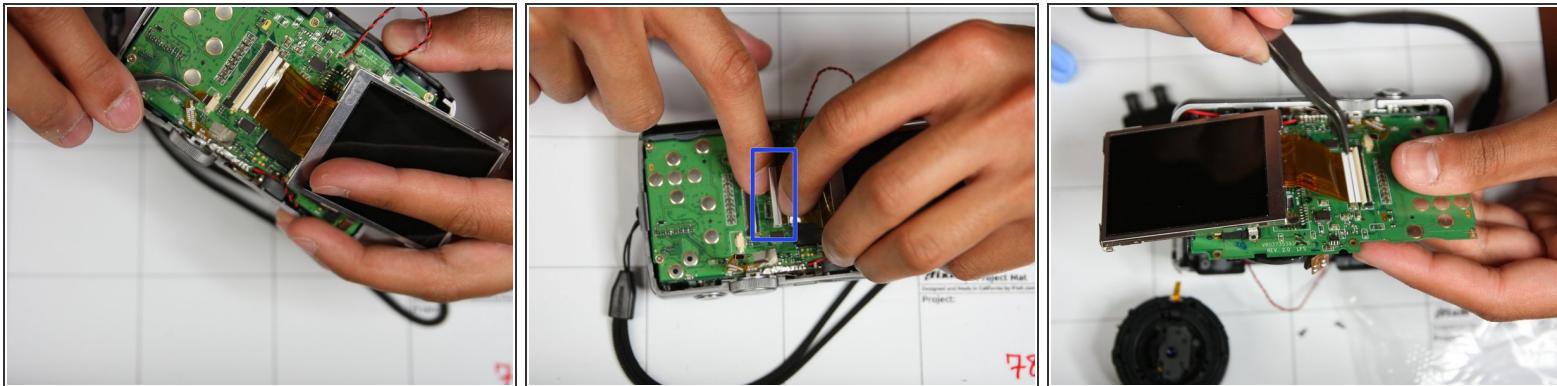

- Lift screen up such that orange circuit ribbon fully extends
- Flip white peg up noted by blue box
- Using tweezers gently remove orange circuit ribbon from white peg. Make sure white peg remains up otherwise ribbon may tear.

To reassemble your device, follow these instructions in reverse order.