



# Samsung T139 Pad Buttons Replacement

Use this guide to replace the pad buttons on your Samsung T139.

Written By: Reagan May



## INTRODUCTION

Use this guide to replace a worn out button pad on your Samsung T139.

### TOOLS:

- iFixit Opening Tools (1)
- Phillips #00 Screwdriver (1)

### PARTS:

- Samsung T139 SGH-T139 Pad Buttons (1)

## Step 1 — Remove Back Cover



ⓘ Power off your phone before beginning disassembly

- Apply pressure to the back cover and slide towards the base

## Step 2 — Remove Battery



- With a plastic opening tool, lift and remove the battery

## Step 3 — Remove Screws




- Remove the four Phillips 1.0mm #0 screws

## Step 4 — Remove Black Plastic Cover




- Using the plastic opening tool, work around the edge of the black plastic cover until it pops off

## Step 5 — Remove Side Buttons

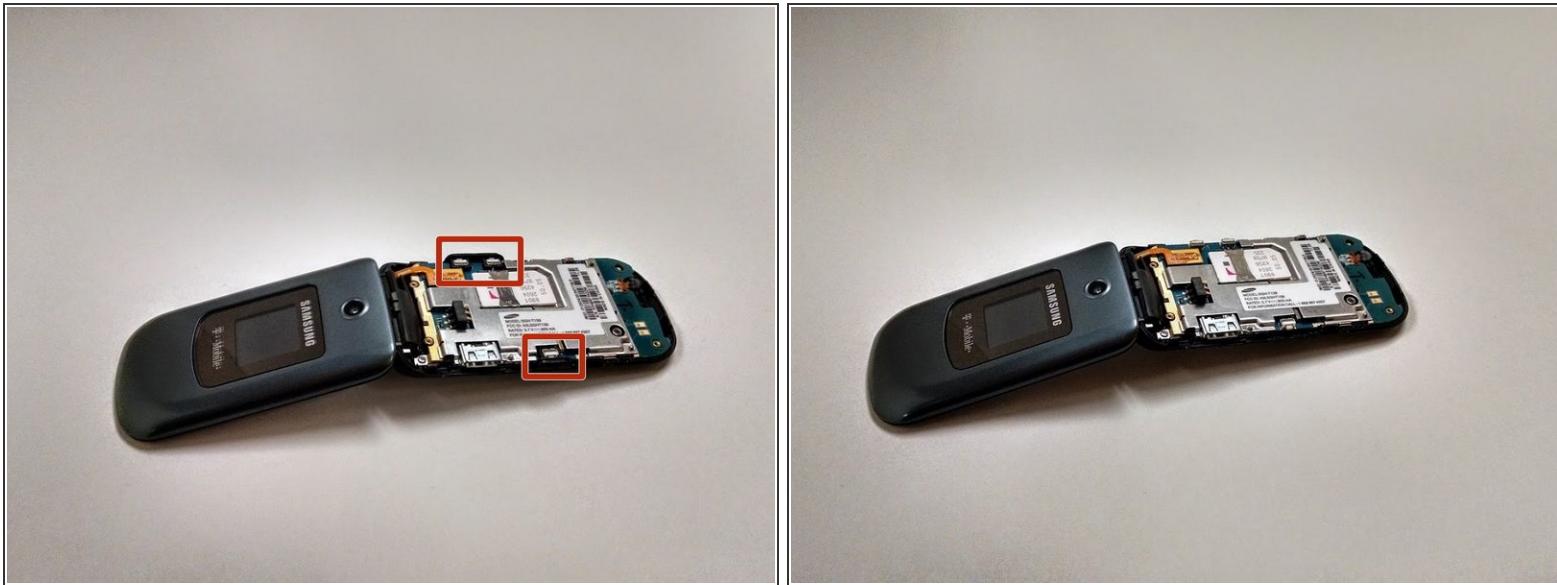

- Remove side buttons by lifting them off the board


## Step 6 — Remove Circuit Board

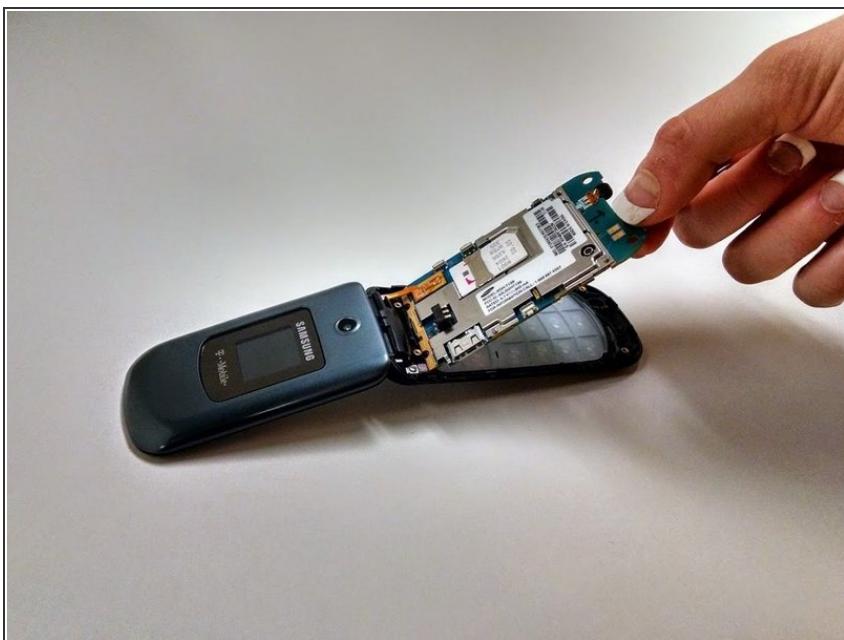

- Lift circuit board up gently

**⚠** Be careful to not pull ribbon cord apart when removing

## Step 7 — Remove Button Pad

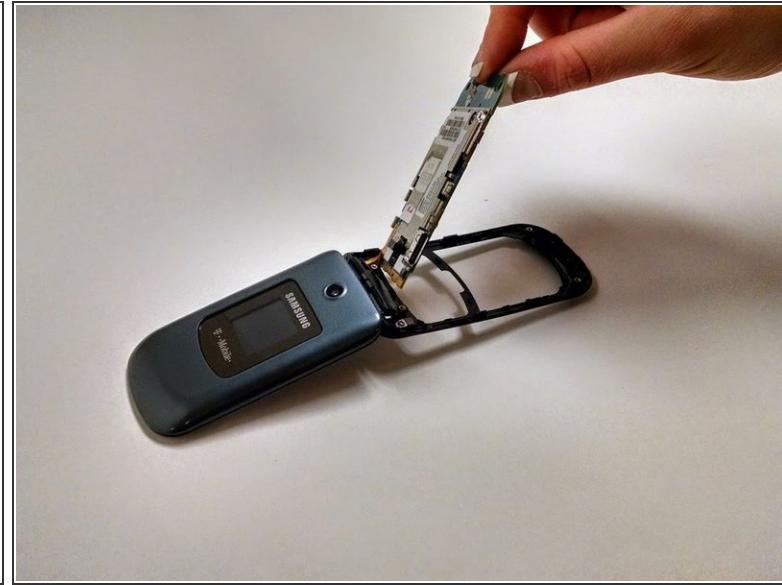

- Lift away button pad

To reassemble your device, follow these instructions in reverse order.