



# Sceptre X9 Komodo VII Board Cover Replacement

How to open the outer case and gain access to the Circuit Board Cover.


Written By: Ted Hsueh



 **TOOLS:**

- [Phillips #2 Screwdriver \(1\)](#)
- [iFixit Opening Tools \(1\)](#)

## Step 1 — Stand

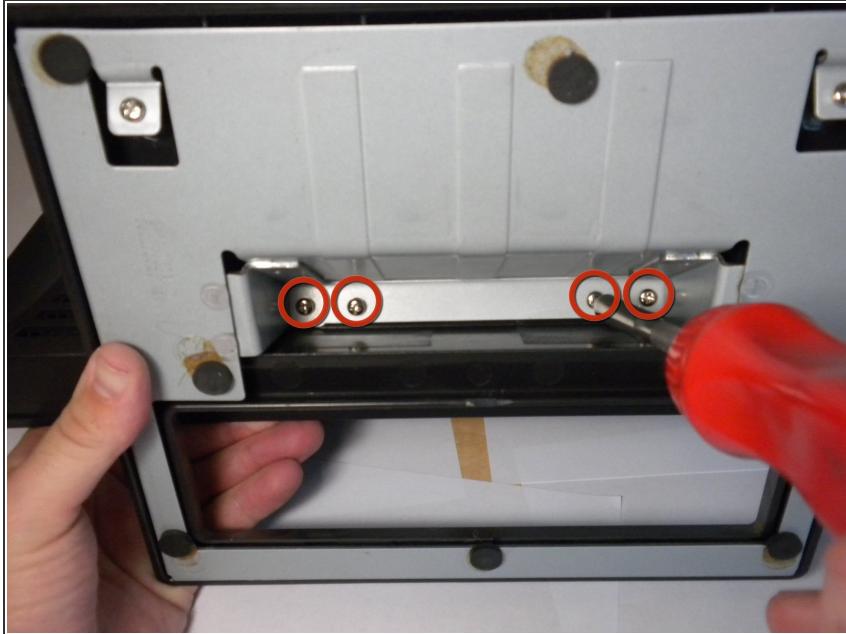

- Place the monitor face down.
- Remove the four 11.5mm screws with a #2 Phillips screwdriver.
- Remove the stand by pulling it out.

## Step 2



- Remove two 11.5mm screws with a #2 Phillips screwdriver.
- Remove the plastic bar.

## Step 3 — Board Cover





- Using a #2 Phillips screwdriver, remove the six 7mm screws at the circled locations.

## Step 4



- Pry the monitor using the plastic opening tool to release the clips holding the cover on.
- (i)* There are four clips on each side, four on the top, and one on the bottom.
- (i)* You may hear a loud snapping noise when releasing the clips. Do not be alarmed, it is natural.
- Once all the clips have been released, remove the cover by pulling it up.

## Step 5

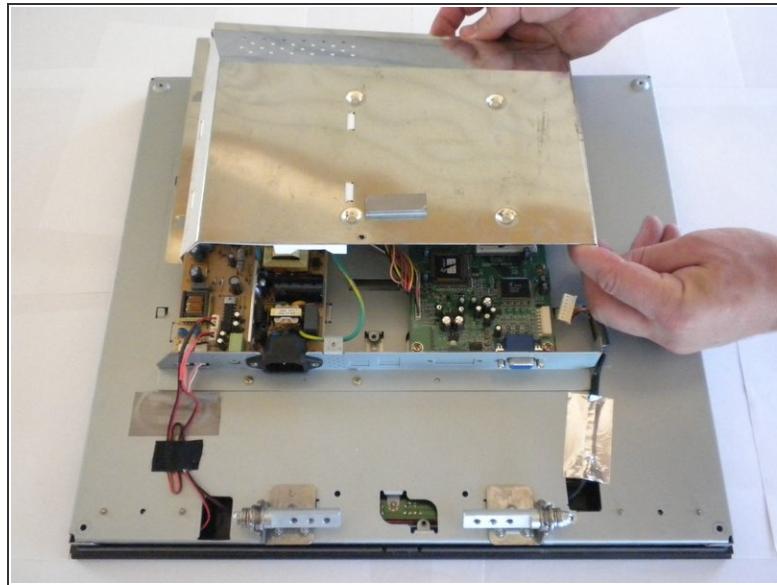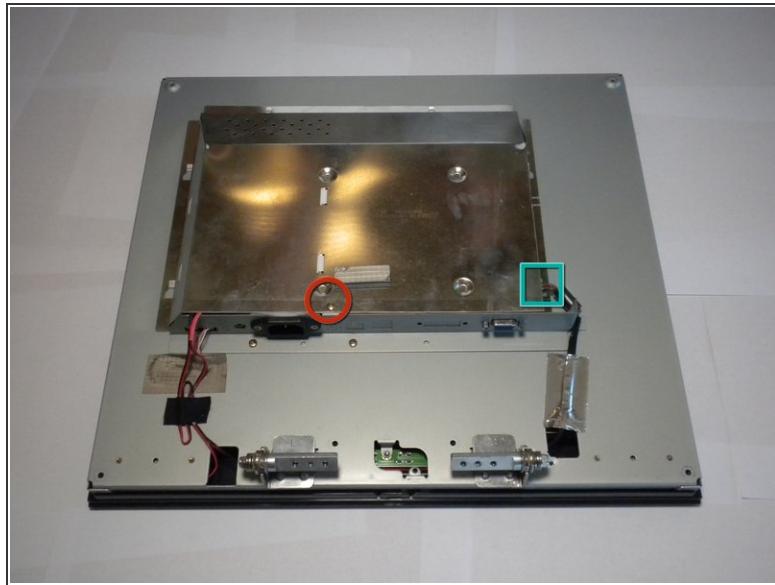

- Using the #2 Phillips screwdriver, remove the one 6mm screw.
- Unplug the indicated cable by pulling on the base.
- Slide the cover toward the top of the monitor.
- Remove the cover.

To reassemble your device, follow these instructions in reverse order.