




Siemens A56 Battery Replacement

This guide will describe the steps necessary to remove the back cover and replace the battery.

Written By: Alex Garrett

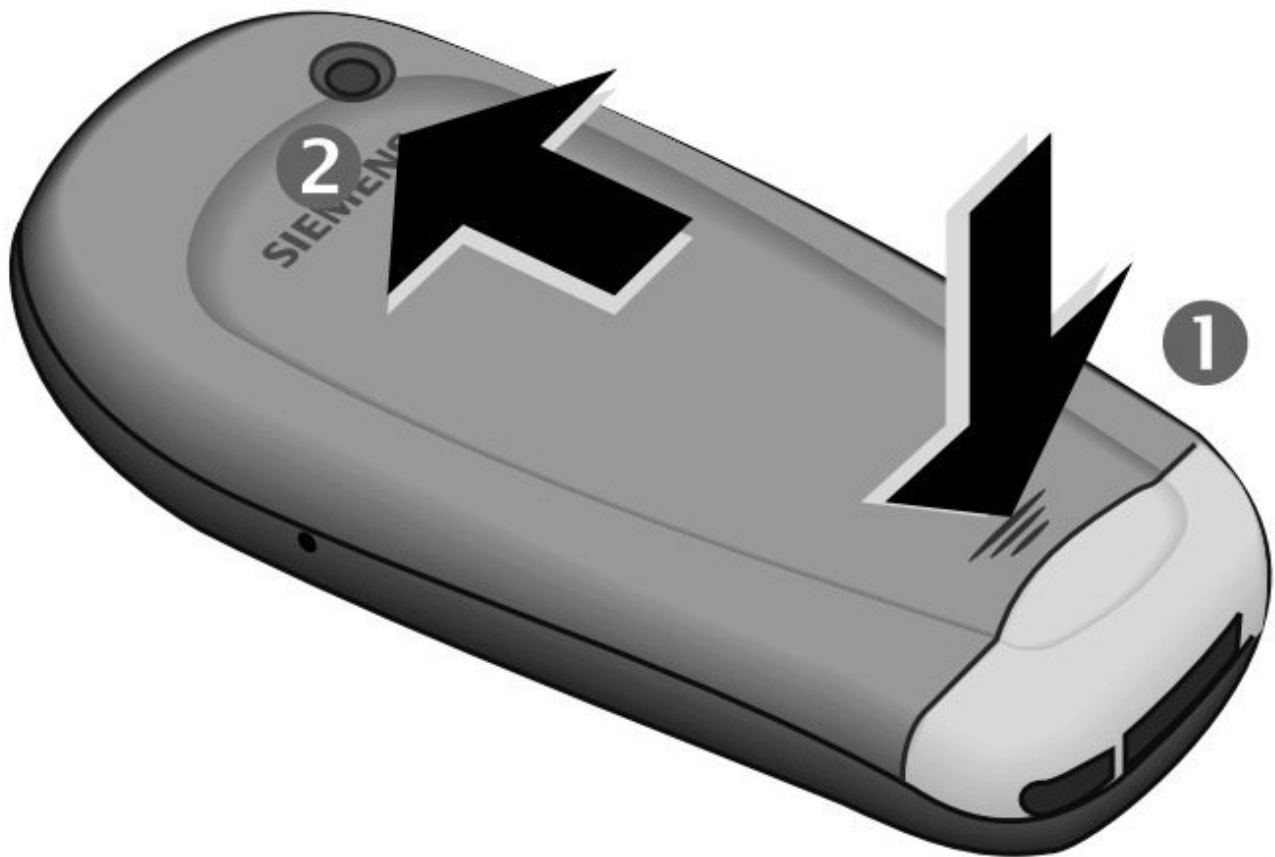





TOOLS:

- [iFixit Opening Tools](#) (1)
-


Step 1 — Battery

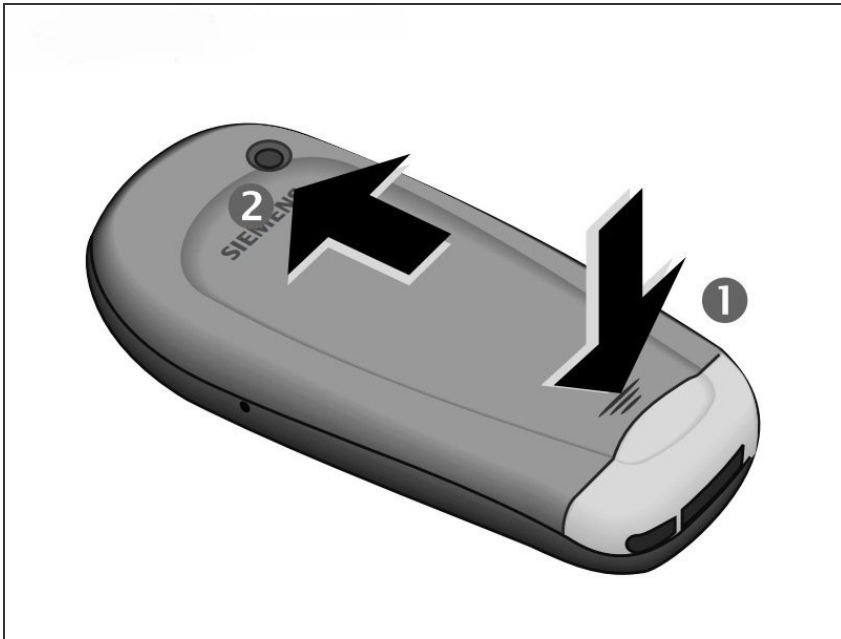


- Press down on the grooved area firmly in the direction of arrow #1.
- While maintaining the downwards pressure, push the back cover in the direction of arrow #2 until the back cover slides off.


 Photos taken from:
<http://theinformr.com/uploads/manuals/si...>


Step 2

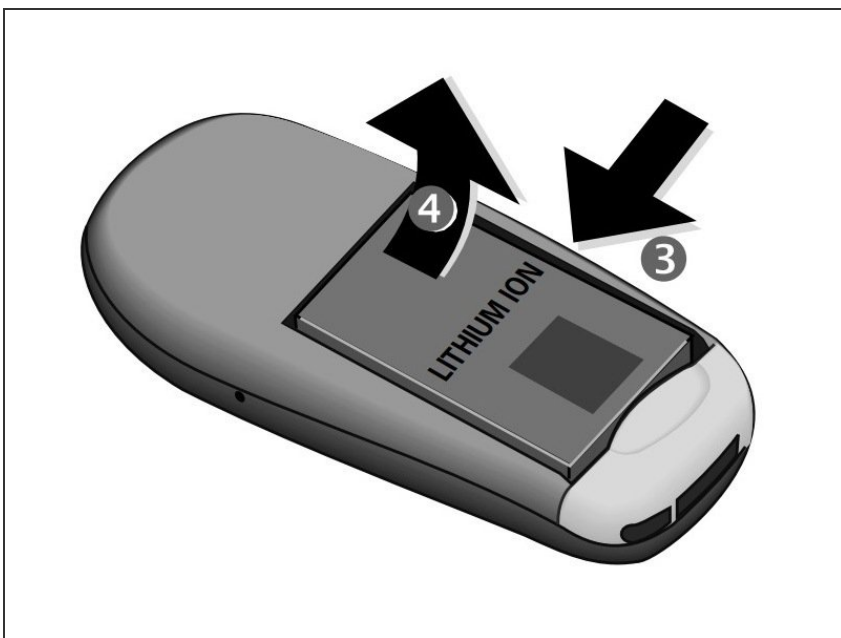

 Turn off the phone before removing the battery to avoid damage.

- Press the latch on the battery in the direction of arrow #3.
- Lift battery at the cutout on the side of the phone, then tilt upwards and remove.

 It may be necessary to use the tip of a fingernail or a plastic lifting tool to remove the battery.

 Photos taken from:
<http://theinformr.com/uploads/manuals/si...>

To reassemble your device, follow these instructions in reverse order.