



Siemens A56 Clean Charging Port Replacement

This is used to clean the charging port of the phone to get rid of corrosion on the surface.


Written By: Lauren Young



 **TOOLS:**

- [Detailing Brush \(1\)](#)

Step 1 — Battery

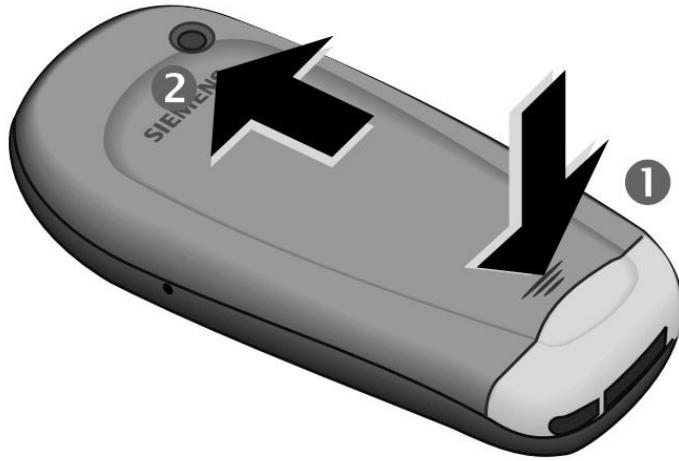


- Press down on the grooved area firmly in the direction of arrow #1.
- While maintaining the downwards pressure, push the back cover in the direction of arrow #2 until the back cover slides off.

(i) Photos taken from:

<http://theinformr.com/uploads/manual/s/si...>

Step 2

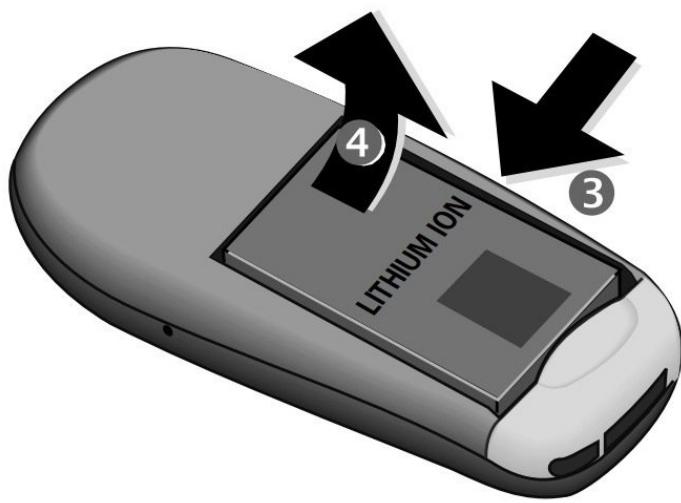

 Turn off the phone before removing the battery to avoid damage.

- Press the latch on the battery in the direction of arrow #3.
- Lift battery at the cutout on the side of the phone, then tilt upwards and remove.

(i) It may be necessary to use the tip of a fingernail or a plastic lifting tool to remove the battery.

(i) Photos taken from:

<http://theinformr.com/uploads/manual/s/si...>

Step 3 — Clean Charging Port



- Use soft brush to clean the charging port of the phone. If needed, use alcohol and a q-tip for more thorough cleaning.