




Siemens A56 Front Plate Replacement

This front plate can be replaced if broken or to have a more appealing cover.

Written By: Lauren Young



Step 1 — Battery

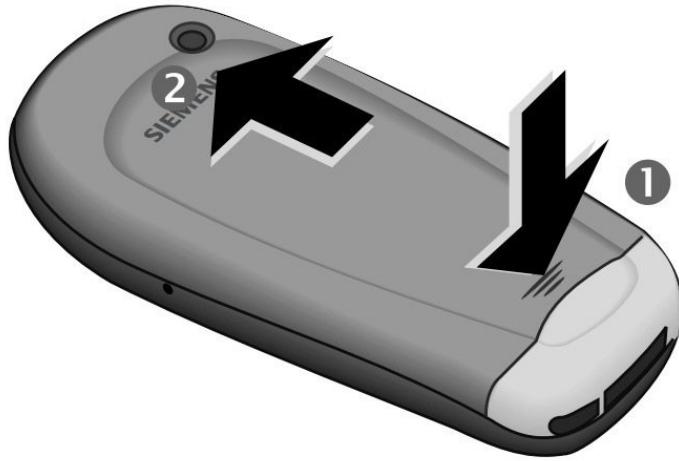


- Press down on the grooved area firmly in the direction of arrow #1.
- While maintaining the downwards pressure, push the back cover in the direction of arrow #2 until the back cover slides off.

(i) Photos taken from:

<http://theinformr.com/uploads/manuals/si...>

Step 2

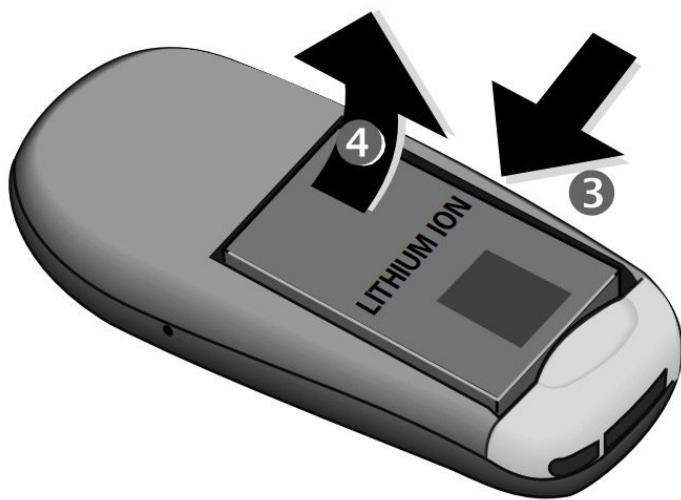

 Turn off the phone before removing the battery to avoid damage.


- Press the latch on the battery in the direction of arrow #3.
- Lift battery at the cutout on the side of the phone, then tilt upwards and remove.

(i) It may be necessary to use the tip of a fingernail or a plastic lifting tool to remove the battery.

(i) Photos taken from:

<http://theinformr.com/uploads/manuals/si...>

Step 3 — Front Plate

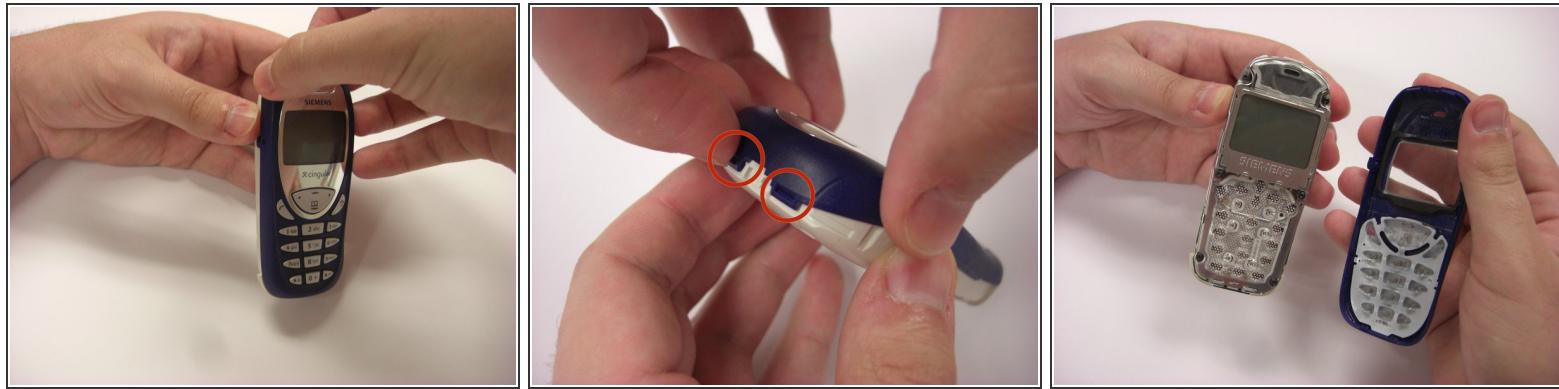

- Firmly grasp the white casing of the phone with one hand and the blue cover with the other hand as seen in the first picture.
- Pull up on the two plastic clips at the top of the phone.
- While the clips are pulled up, pull the blue cover away from the white casing to remove it.

To reassemble your device, follow these instructions in reverse order.