Sirius Stiletto 2 Front Cover Replacement

Guide on how to replace the front cover.

Written By: Benjamin Her

This document was generated on 2019-09-22 05:48:08 PM (MST).

© iFixit — CC BY-NC-SA   www.iFixit.com   Page 1 of 5

INTRODUCTION

This guide will show how the front cover is replaced in the case that the screen cracks or breaks.

🔧 TOOLS:

- iFixit Opening Tools (1)
- Phillips #00 Screwdriver (1)
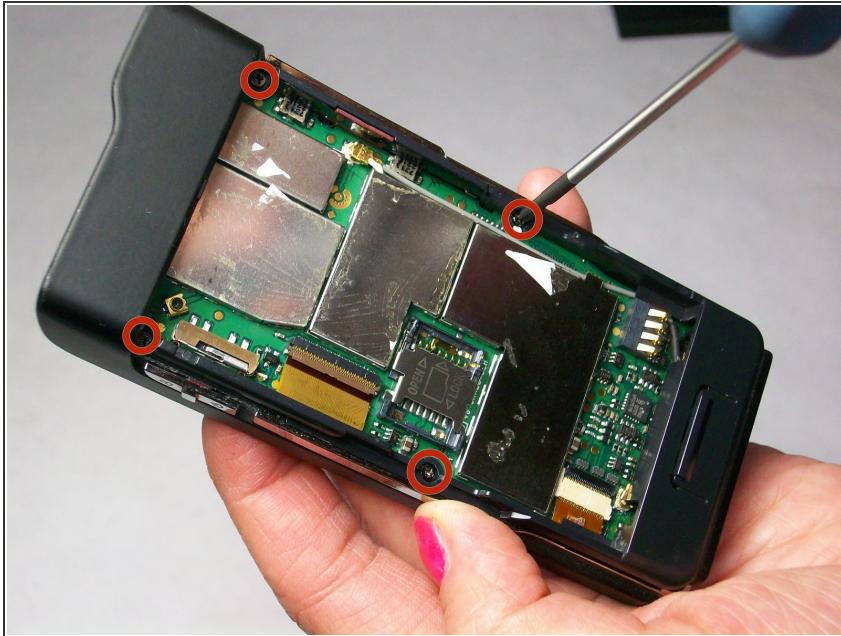
Step 1 — Battery

- From the back of the device, slide the back panel downwards to unlock the panel.

- Lift the panel up, exposing the battery.

Step 2

- Pinch the battery from both sides and lift the battery to remove it.

This document was generated on 2019-09-22 05:48:08 PM (MST).

Step 3 — Front Cover

- Unscrew the four 6.68mm (1.43mm diameter) Philips #00 screws.
  - (i) If needed, remove the sticker to see the screws

Step 4

- Start by using a plastic opening tool to loosen the front cover from the sides.

- Work your way to the bottom of the cover then the top.

- Carefully pry the front cover off.

This document was generated on 2019-09-22 05:48:08 PM (MST).

To reassemble your device, follow these instructions in reverse order.

This document was generated on 2019-09-22 05:48:08 PM (MST).