



Skullcandy Lowrider Ear-pad Replacement

We will be replacing a damaged or broken ear-pad.

Written By: Ryley



INTRODUCTION

If the ear-pad on your Skullcandy headphones is damaged, removed, or no longer functioning correctly, this guide will show you both how to remove the ear pad safely, and apply a new one.

TOOLS:

- [iFixit Opening Tools \(1\)](#)

Step 1 — Replacing Damaged or Broken Ear-pad




- Separate the padding from your ear-cup by pulling at the padding where it meets the plastic of the ear-cup. Pull gently and do this along the entire circumference of the headphone ear-cup.

Step 2



- Now that the padding has been completely removed, take the new ear pad, and wrap the fabric completely around the plastic ear-cup as shown.

Step 3

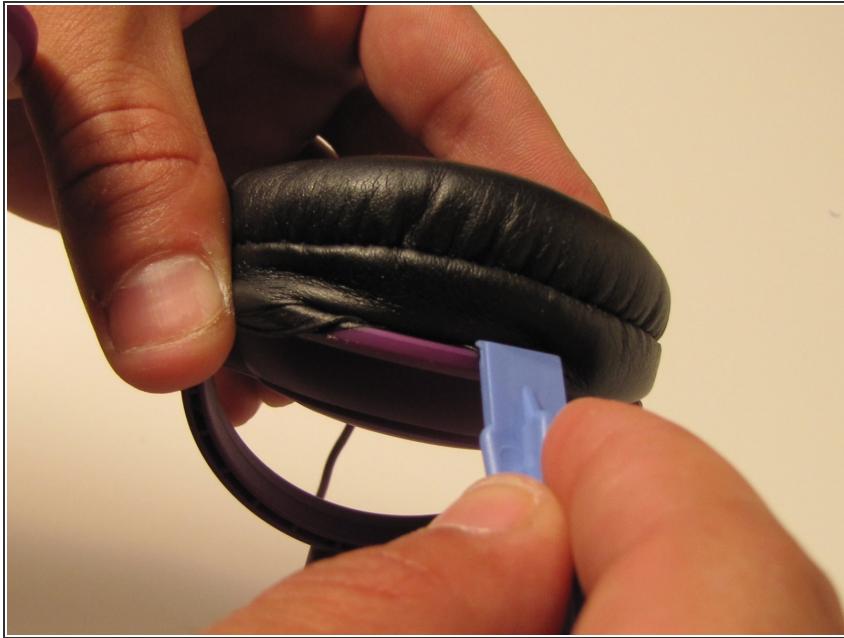

- Then take one of the plastic opening tools, and apply fabric back into plastic slot from which it was removed as shown. Wedge fabric back into plastic along the entire circumference of plastic ear-cup.

To reassemble your device, follow these instructions in reverse order.