




# Skytex Skypad Alpha 2 Battery Replacement

Use this guide to replace the battery of the Skytex Skypad Alpha 2 tablet.

Written By: Rebecca Ramirez

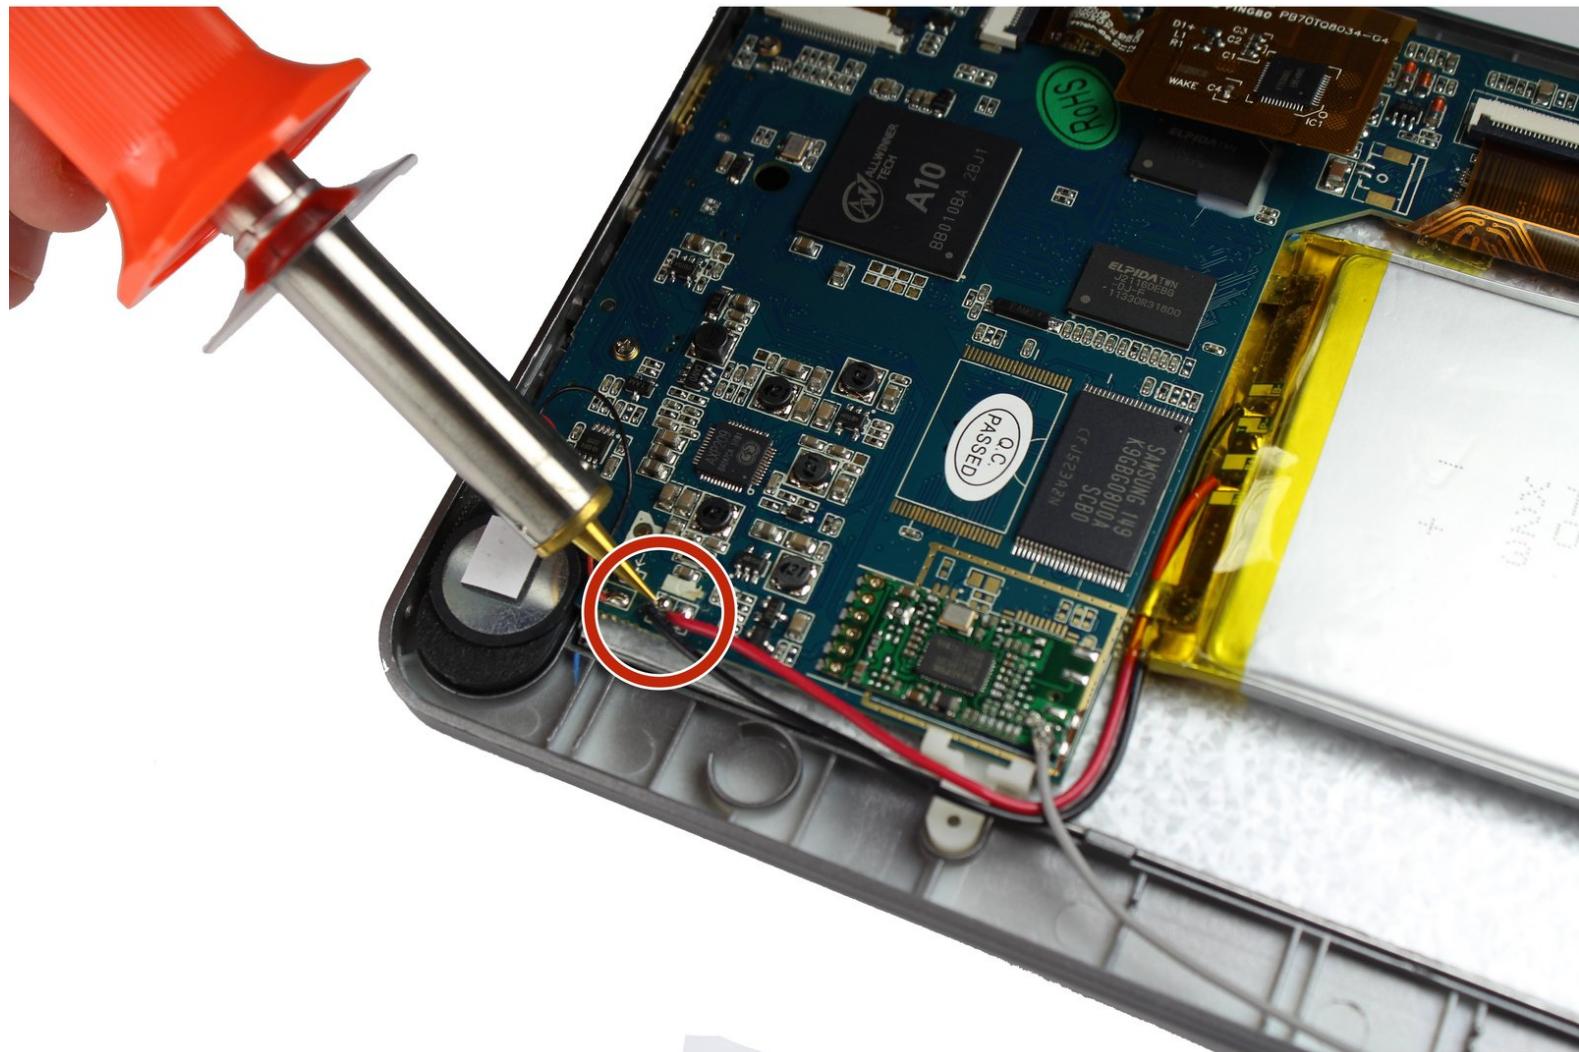

## INTRODUCTION

By following this guide one is able to access and remove the battery of the Skytex Skypad Alpha 2 tablet in two steps. These steps include removing soldered connections and the removing of the battery itself.

### TOOLS:


- [iFixit Opening Tools](#) (1)
- [Portable Soldering Iron](#) (1)
- [Phillips #000 Screwdriver](#) (1)

## Step 1 — Back Cover




- Power off the tablet.
- ⚠ Unplug the tablet from the power source if it is connected.

## Step 2

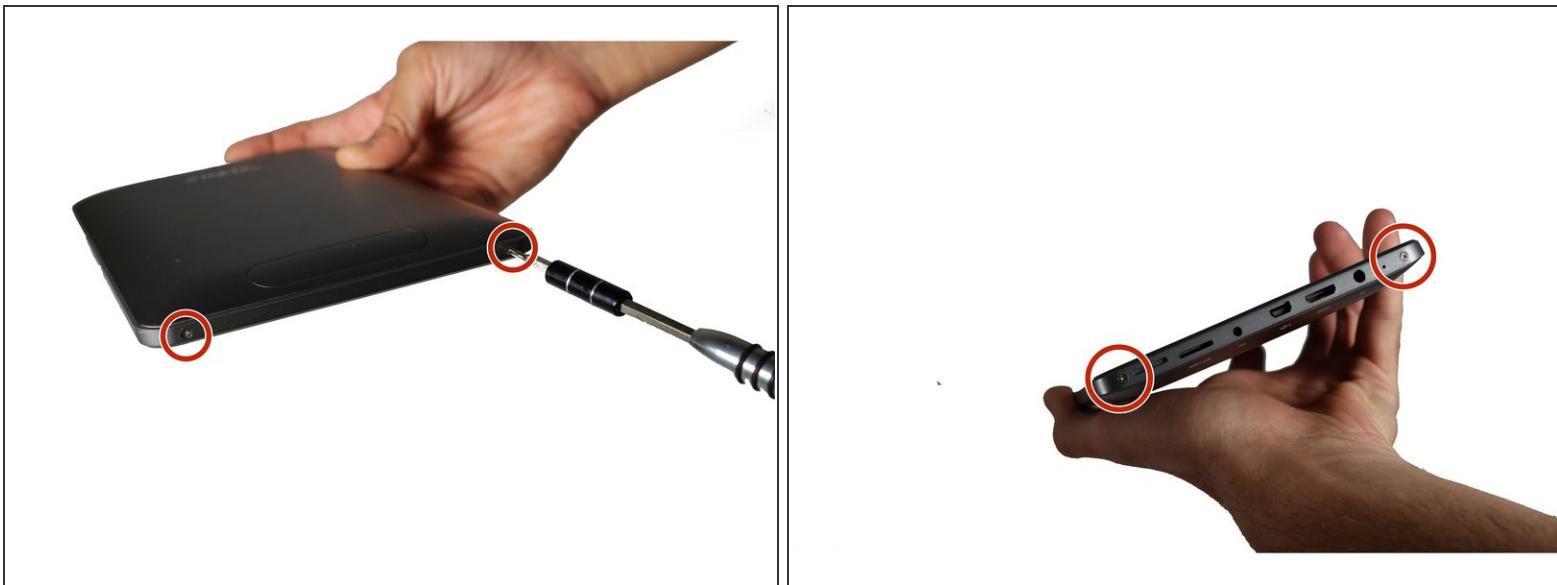

- Remove the (4) 3.5mm screws using a phillips #000 screwdriver.

## Step 3

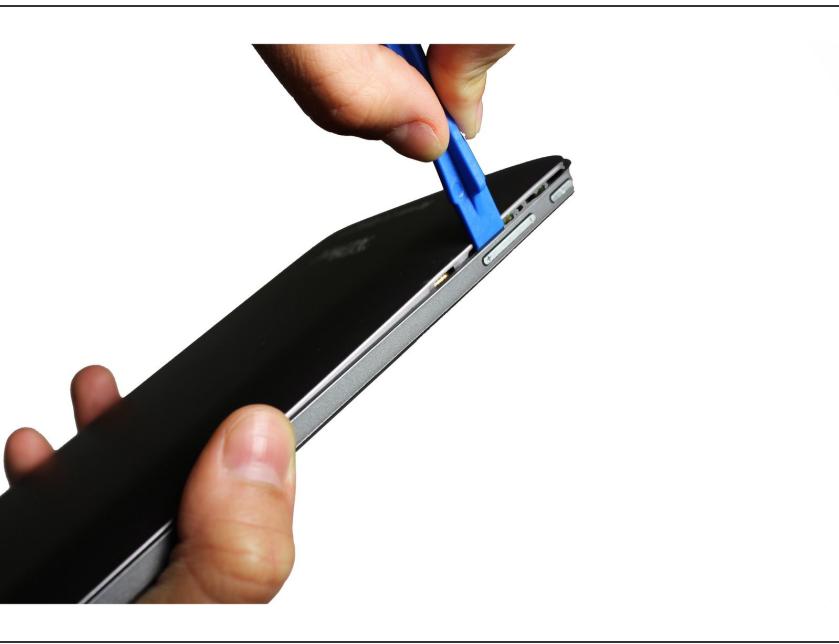

- Use the plastic opening tool to work your way around the tablet, releasing the back case from the tabs.


## Step 4



- Release the back case from the rest of the tablet with your hand.

**⚠** Do not pry the case too hard; doing so can damage the tablet.

## Step 5 — Battery

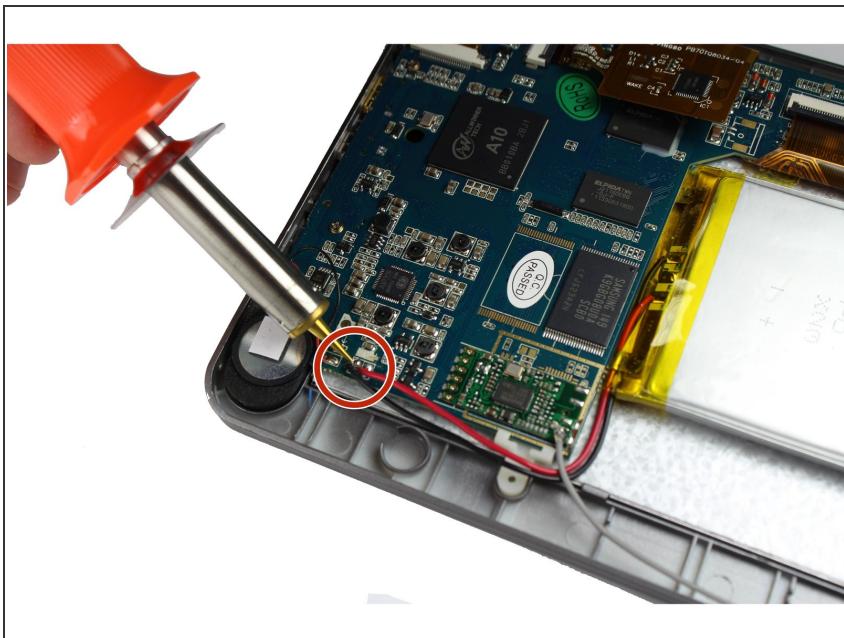

- Remove soldered connections to separate the battery wires from the motherboard.
- **i** Remove all black and yellow tape, if necessary, on motherboard.
- **i** Following the red and black wires, that come out of the battery, to their respective connections on the motherboard will indicate where to solder.
- **↗** Follow link for further soldering information: [How to Solder and Desolder Connections](#)

## Step 6



- Use the plastic opening tool to remove battery from tablet.
- **⚠** Be sure to remove the battery carefully to avoid damage. Damage of battery can release harmful chemicals and may cause a fire.

To reassemble your device, follow these instructions in reverse order.