




# SodaStream Source Internal Disassembly

Prerequisite Only


Written By: Angela Mossgrove

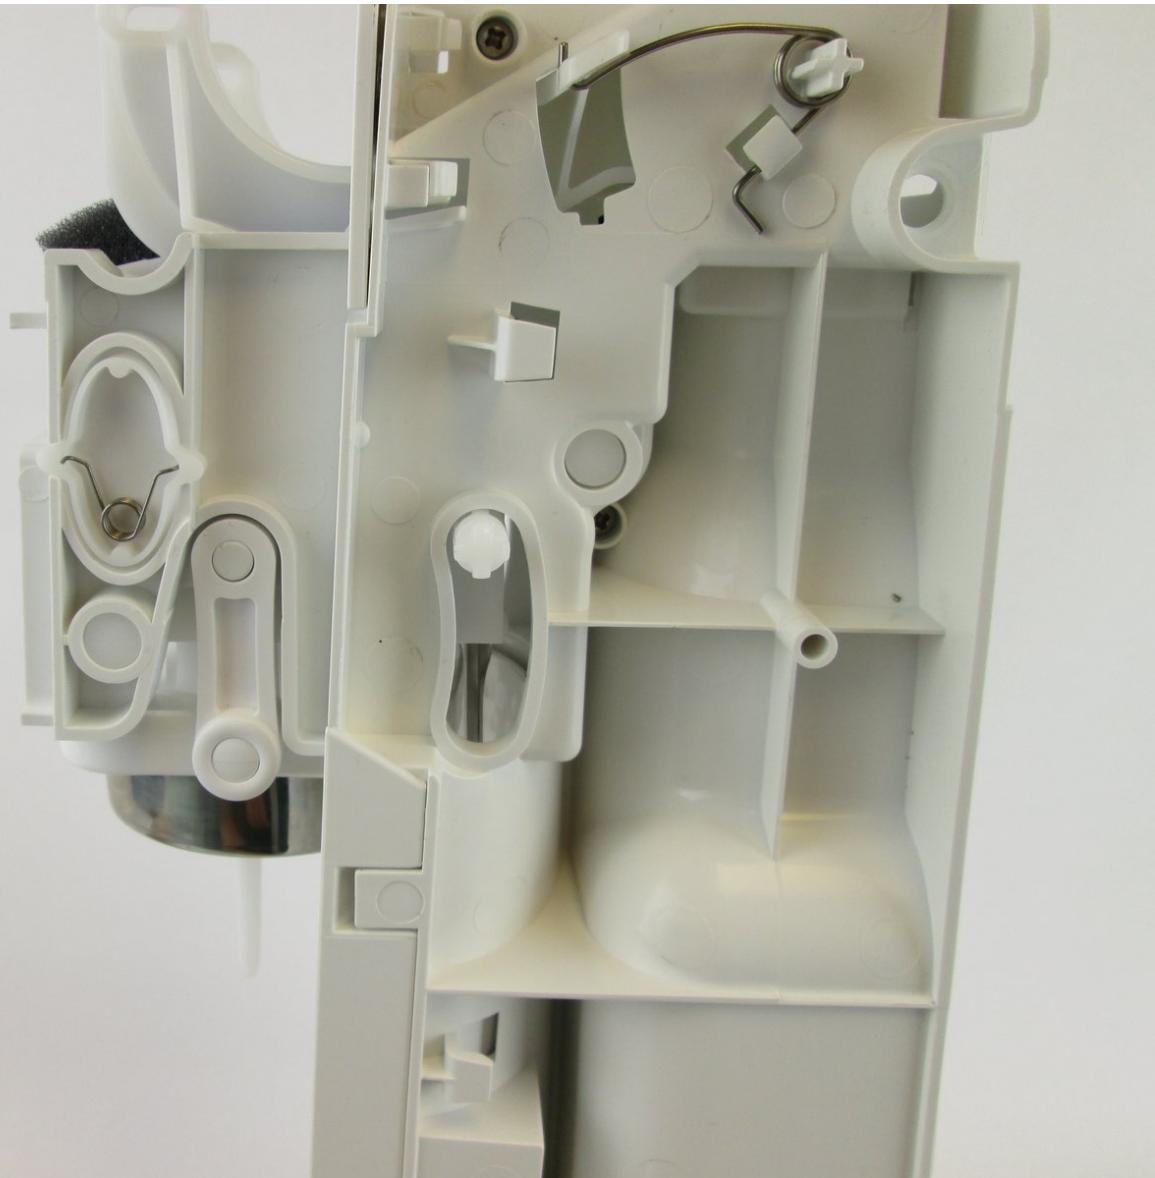

 **TOOLS:**

- [iFixit Opening Tools \(1\)](#)
- [Phillips #1 Screwdriver \(1\)](#)

## Step 1 — SodaStream Source Internal Disassembly

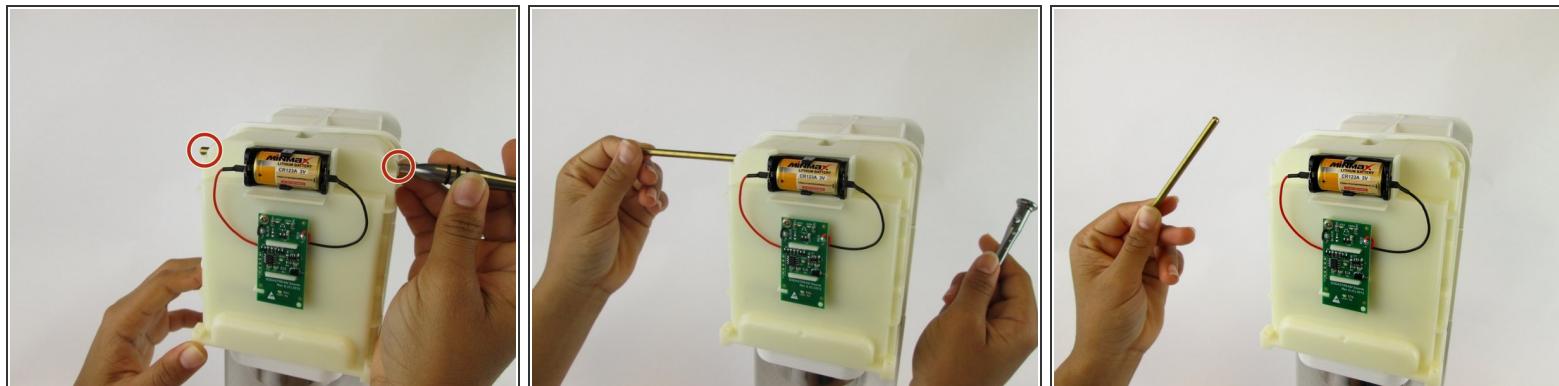


- Push the gold bar, located in the top of the device, out of the carbonating block.
- ⓘ You can use the end of your screwdriver to push this piece out.

## Step 2




- Slide the yellow battery cover up and away to remove it from the device.

## Step 3

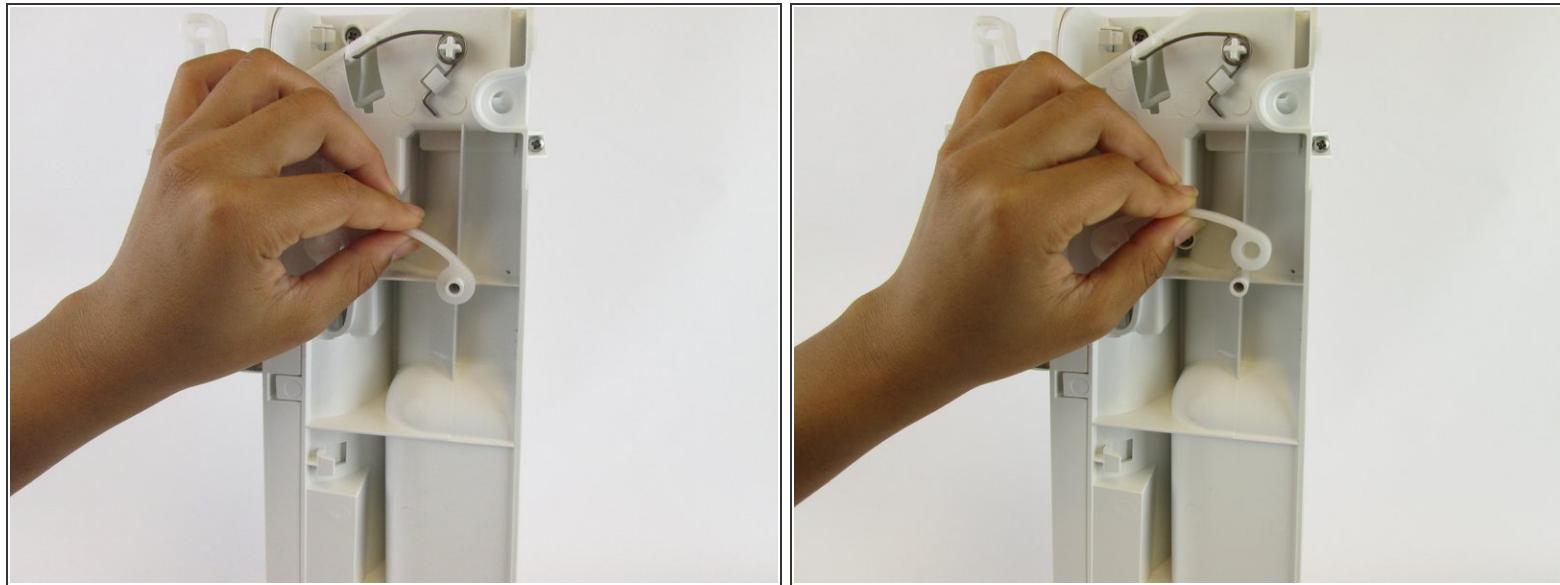



- Unhook the bottom piece of the plastic arm on each side of the device.

## Step 4

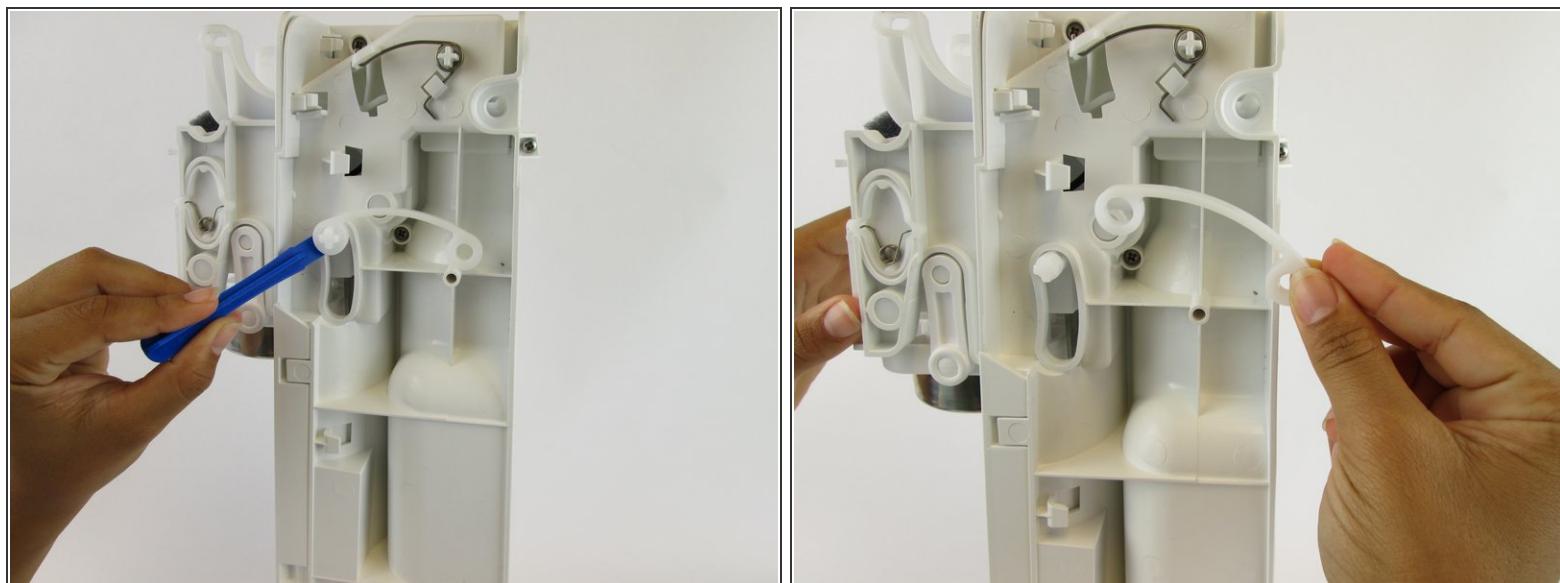



- Lift the top of the plastic arm with the spudger and remove it on both sides.

## Step 5

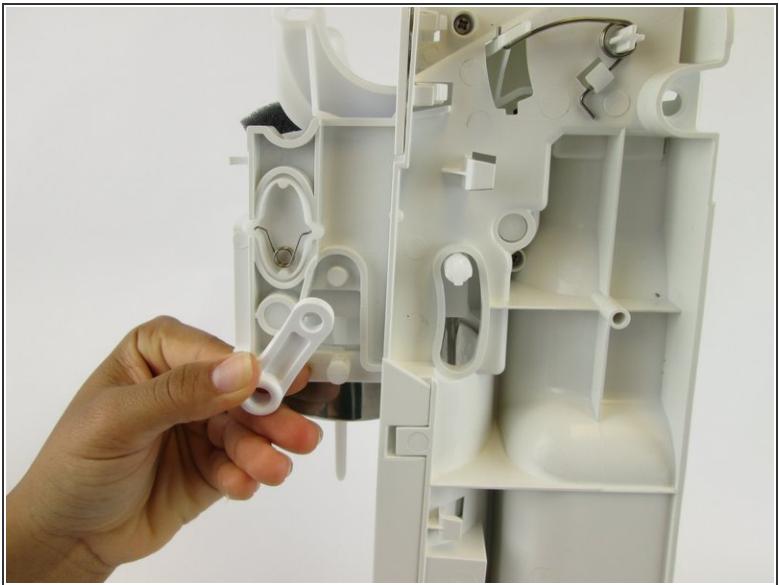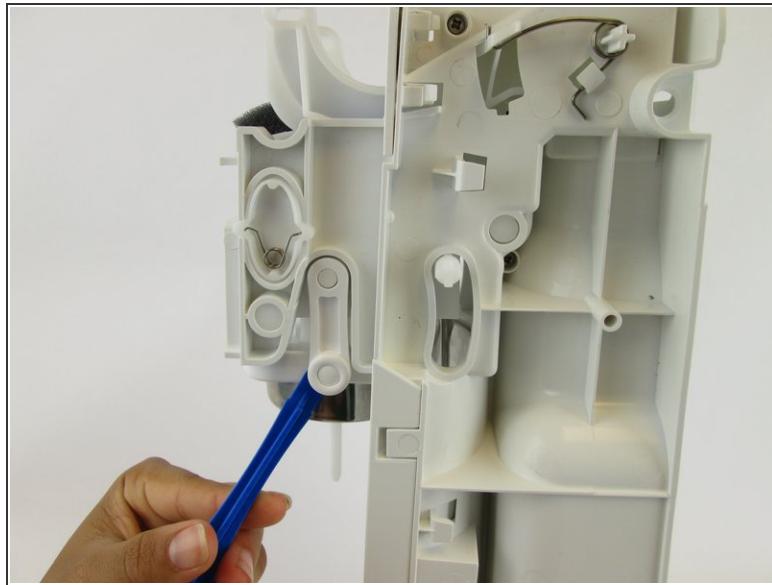


- Remove the plastic piece, located near the front of the carbonating block, from both sides of the device using a plastic opening tool or nylon spudger.

## Step 6

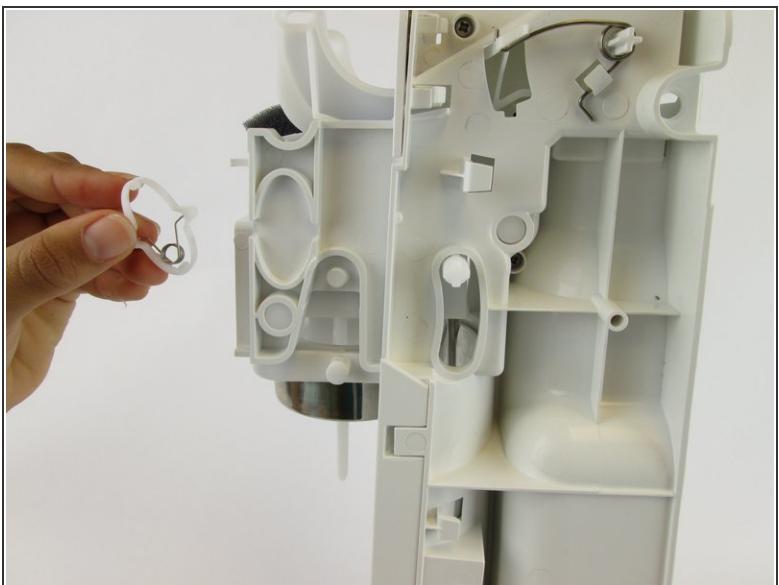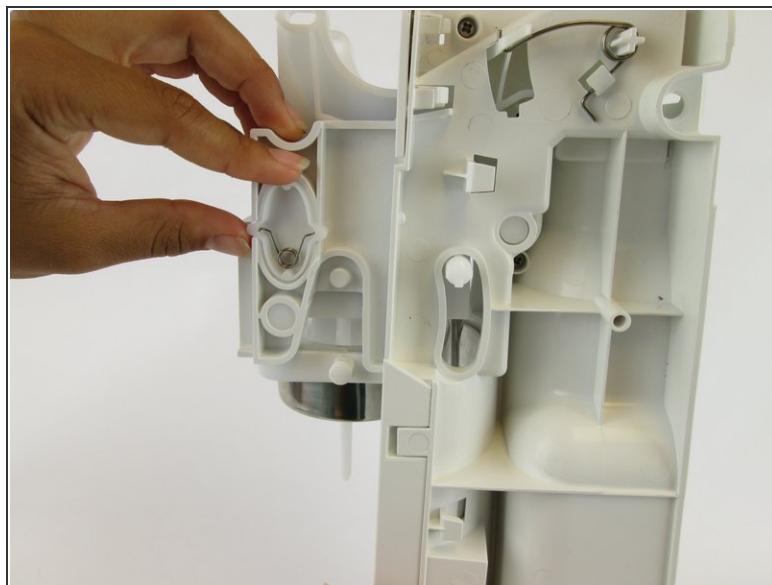


- Remove the plastic oval and the spring within it.

## Step 7

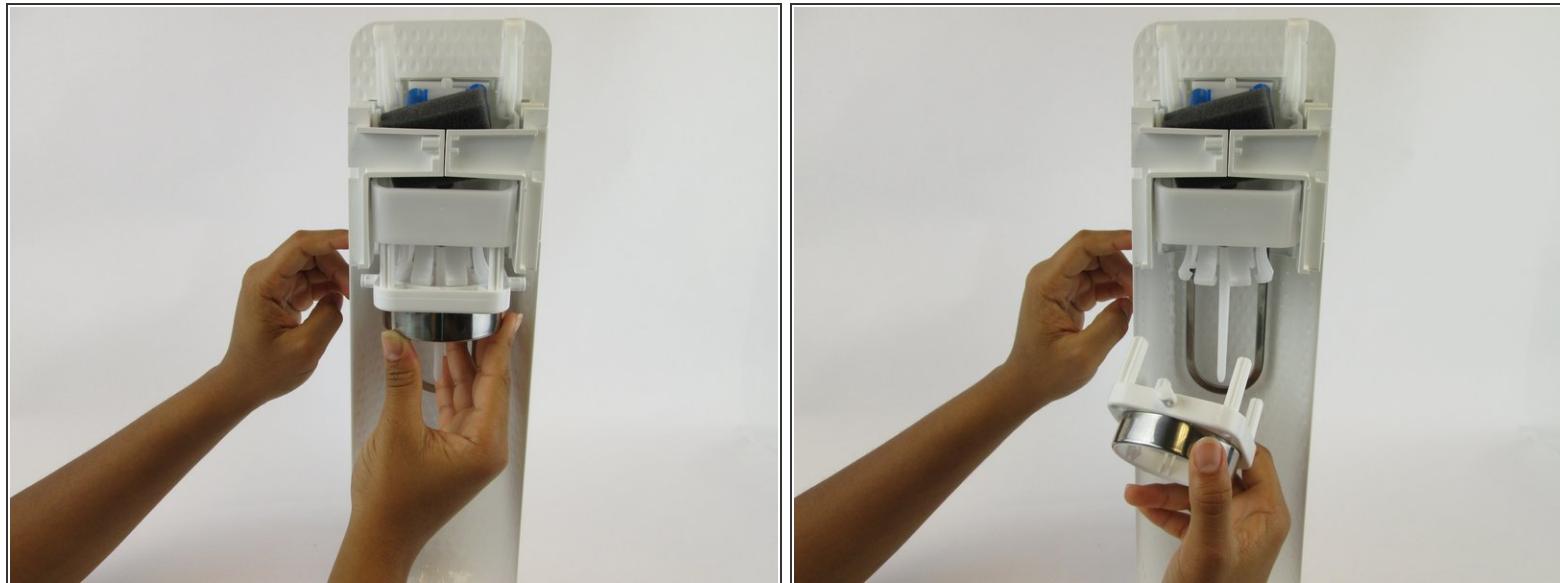

- Pull the loader tab cover down and away from the rest of the carbonating block.


## Step 8

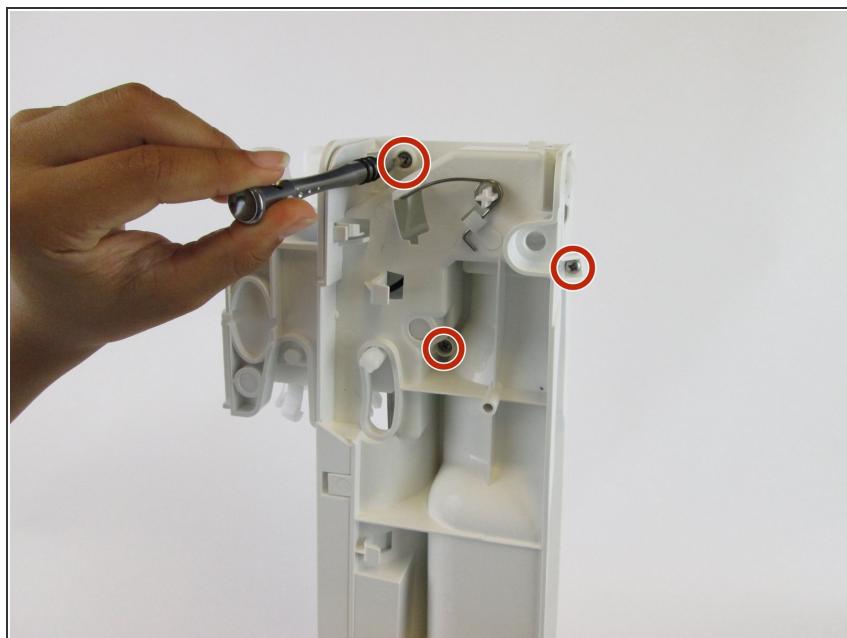

- Remove the three 17.9 mm screws located on the right side.


*ⓘ These screws may be difficult to access.*

## Step 9

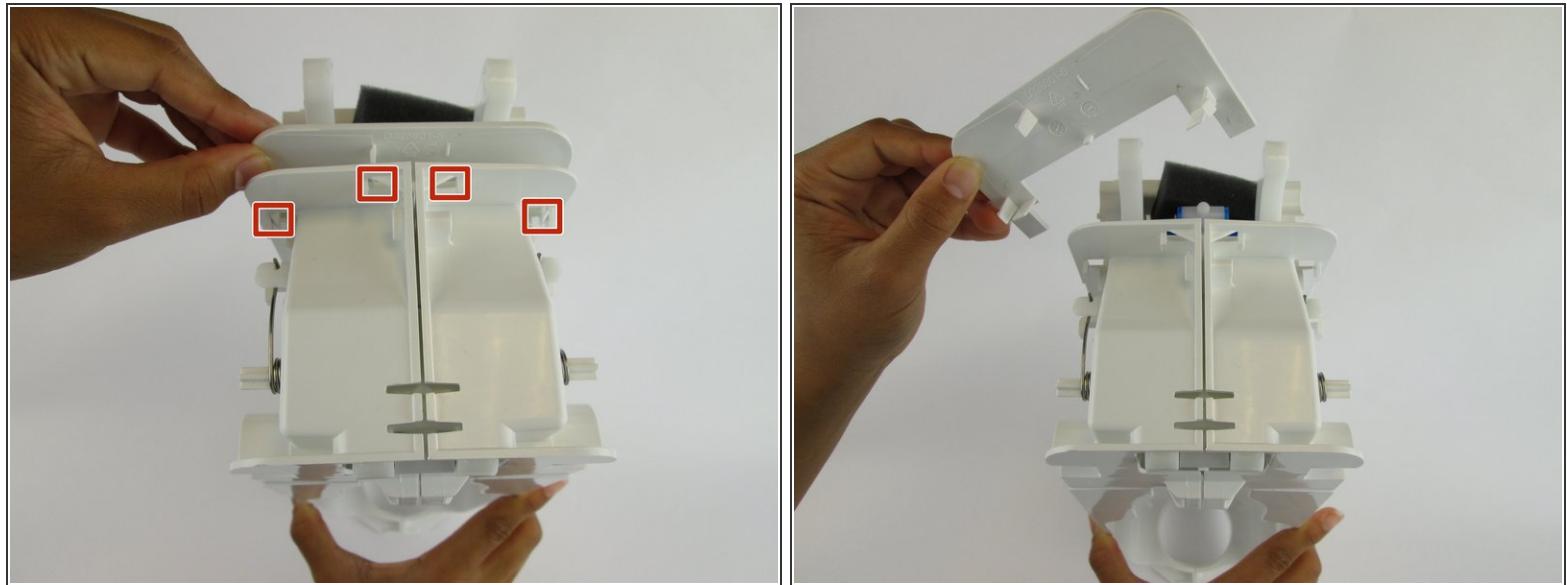


- Unhook the four clips on the top of the carbonating block and remove the plastic cover.

## Step 10

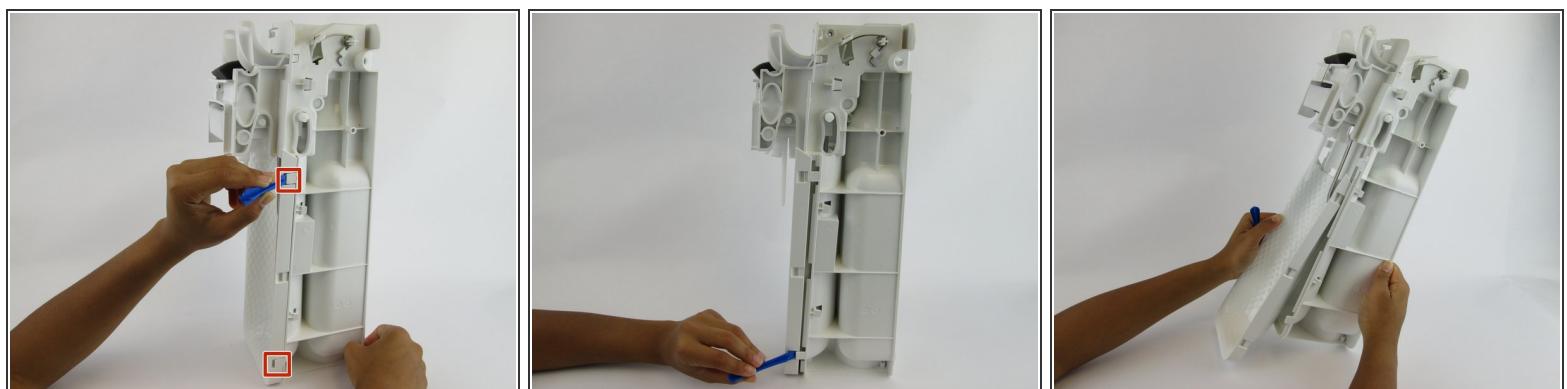


- Lift the clips located on both sides with the plastic spudger. Slide the front cover off.

## Step 11

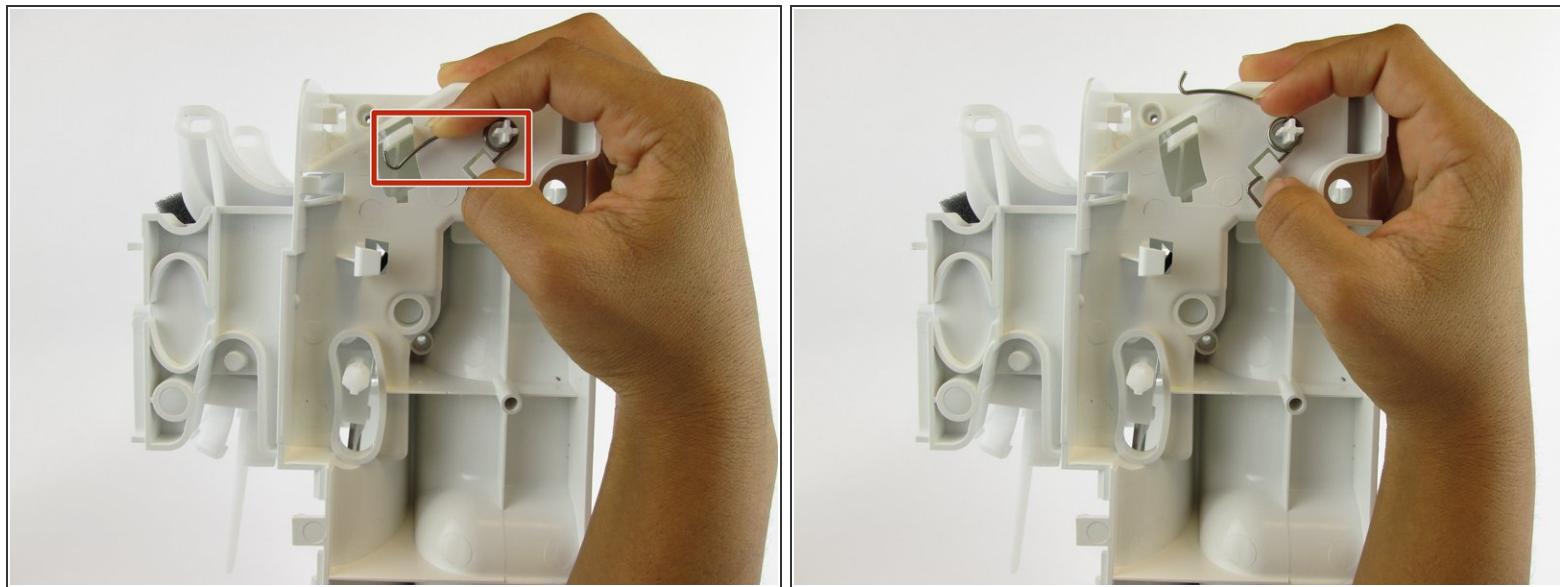

- Unhook the silver spring arms on both sides of the device by pushing down.

## Step 12

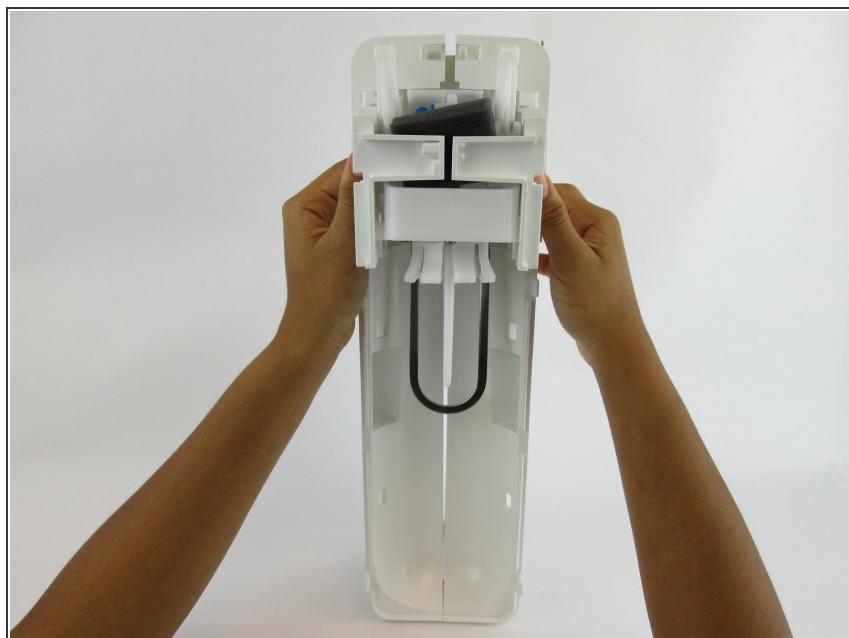

- Grip the right and left sides of the device and pull it into two identical halves.


*(i)* Once these two pieces are apart, all remaining internal components will fall out of the device.

## Step 13



- Pull the foam pad up and remove it from the front side of the carbonation component.

## Step 14

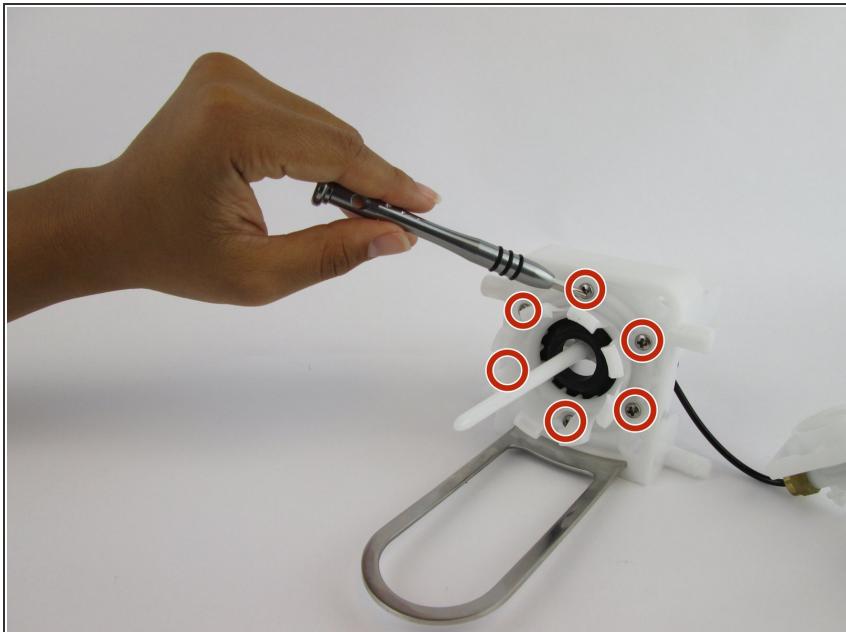

- Remove the six 17.7 mm screws from the underside of the loader tab piece.

## Step 15



- Pull the loader tab out of the nozzle.

To reassemble your device, follow these instructions in reverse order.