




Sonos One Tweeter Diaphragm Repair/ Replacement

This guide is to demonstrate how to repair the diaphragm of the Sonos One tweeter.

Written By: Marcus Glowa

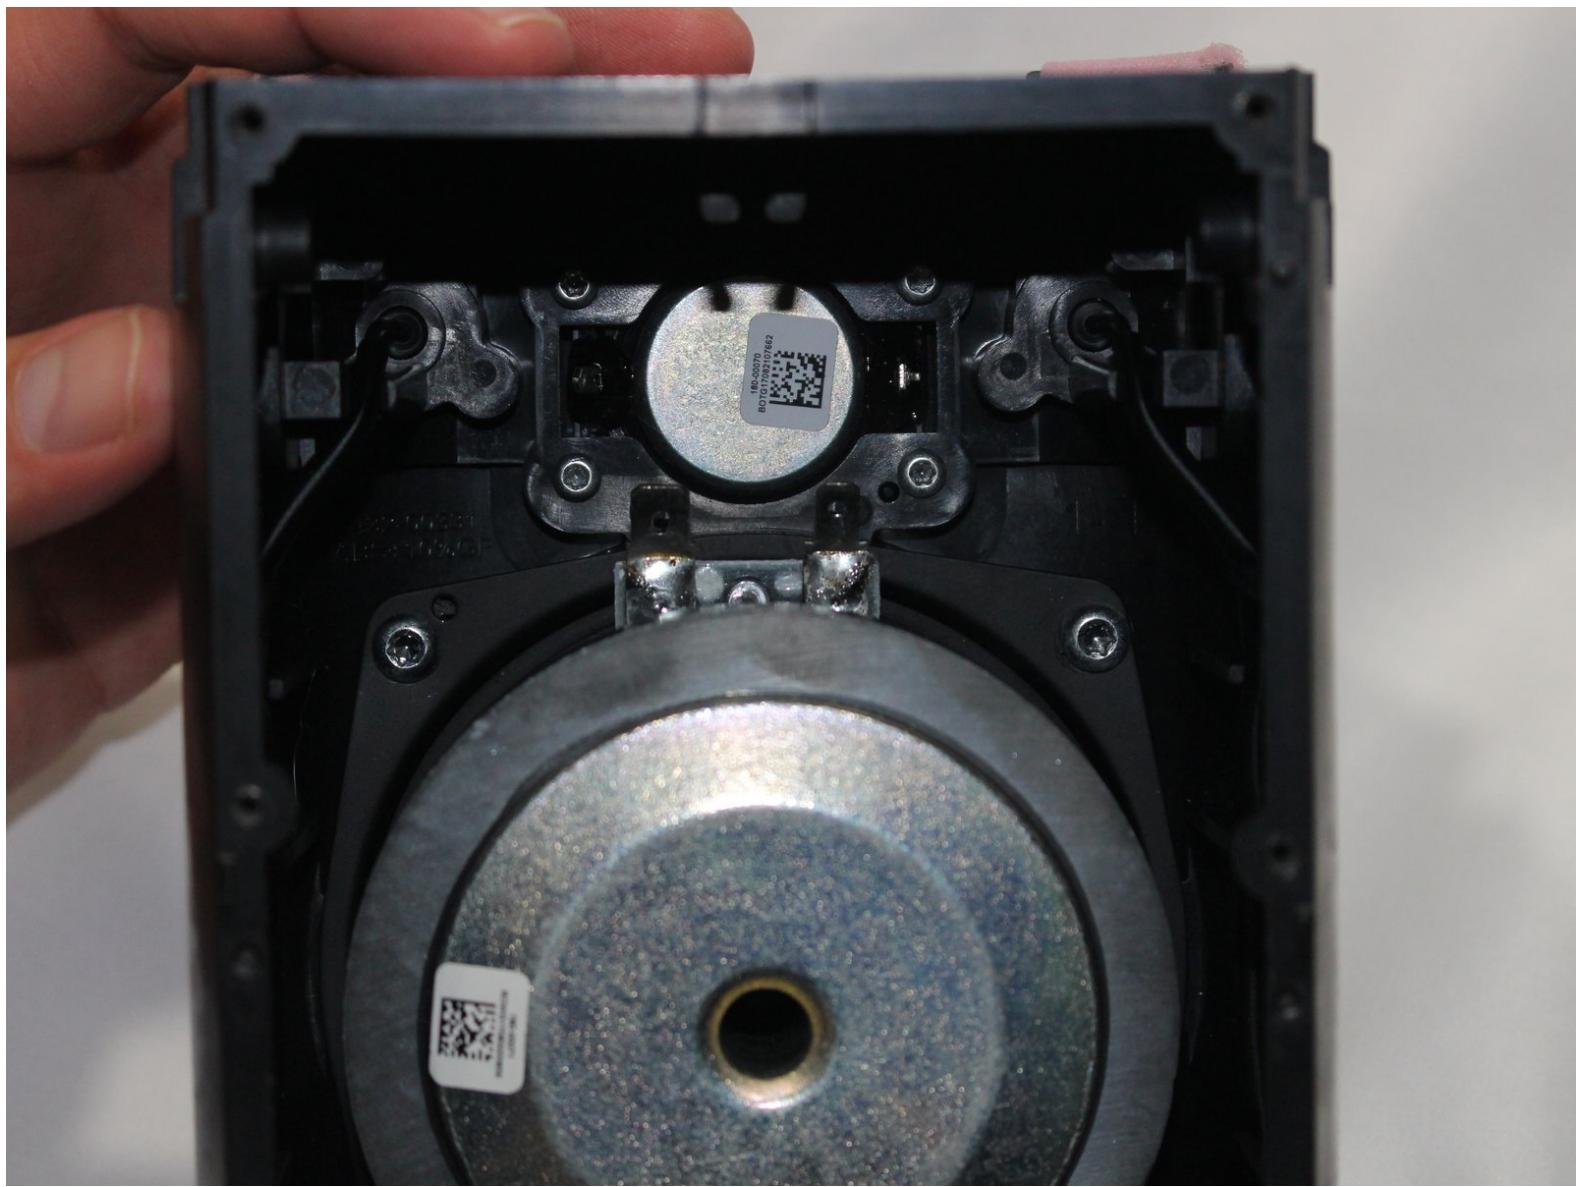

INTRODUCTION

This guide is for the replacement of tweeter diaphragm for the Sonos One.

Important: Accessing the internals of the Sonos One will void the factory warranty and make the unit rejected for factory repair, even if warranty is expired.

TOOLS:

- [T10 Torx Screwdriver \(1\)](#)
- [T8 Torx Screwdriver \(1\)](#)
- [iFixit Opening Tools \(1\)](#)
- [Spudger \(1\)](#)

Step 1 — Protective Cover



- Disconnect all power cords.
- Remove the rubber foot and plastic screw guard on the bottom of the device using a plastic opening tool.

Step 2



- Remove the four 10mm Torx T10 screws from the bottom of the speaker.

Step 3




- Remove the bottom cover by squeezing the protective cover slightly while pushing up with your fingers.

Step 4



- The protective cover clip is very thin and deforms easily.
- Remove the single 8mm Torx T10 screw and protective cover clip.

Step 5

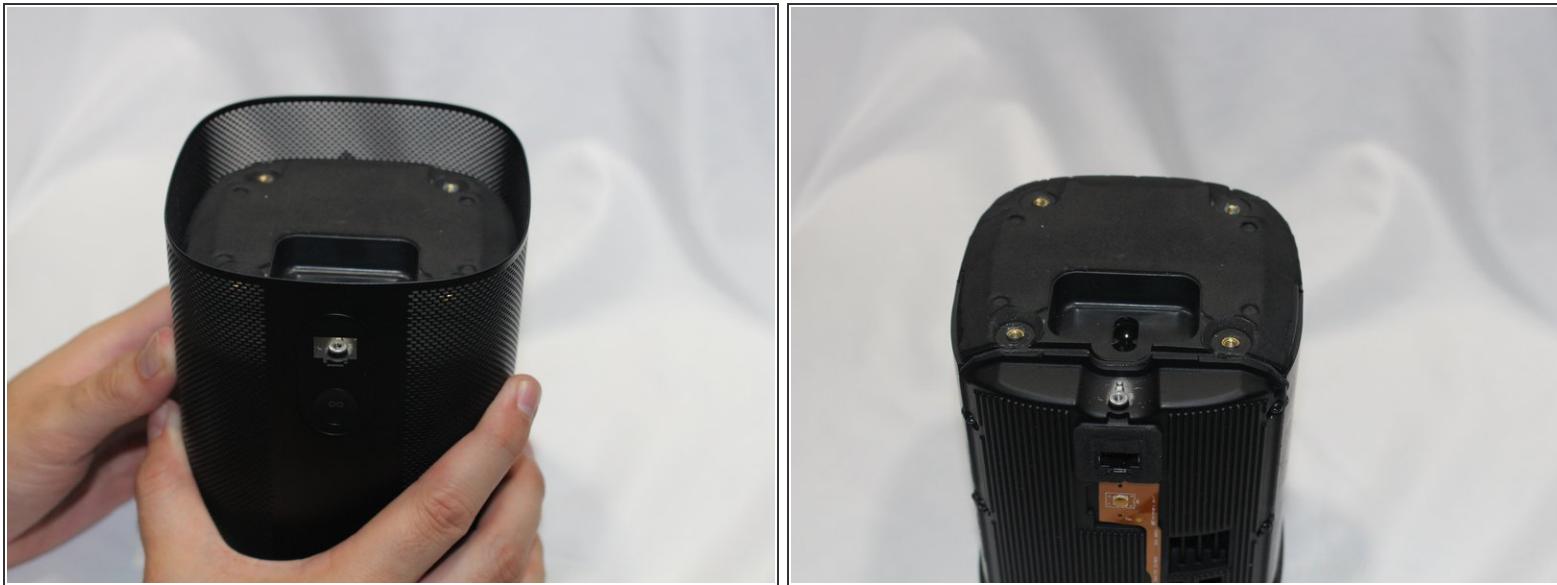

- Slide the protective cover upwards to remove.

Step 6 — Control Panel & Microphone




- Use the pointed end of a spudger to remove the covers that hide the screws.
- Remove the four 9mm Torx T8 screws from around the perimeter of the control panel.

Step 7




- With the front of the unit facing you, lift the control panel up using your thumbs.
- There's a ribbon cable attaching the control panel to the speaker so work slowly.

Step 8

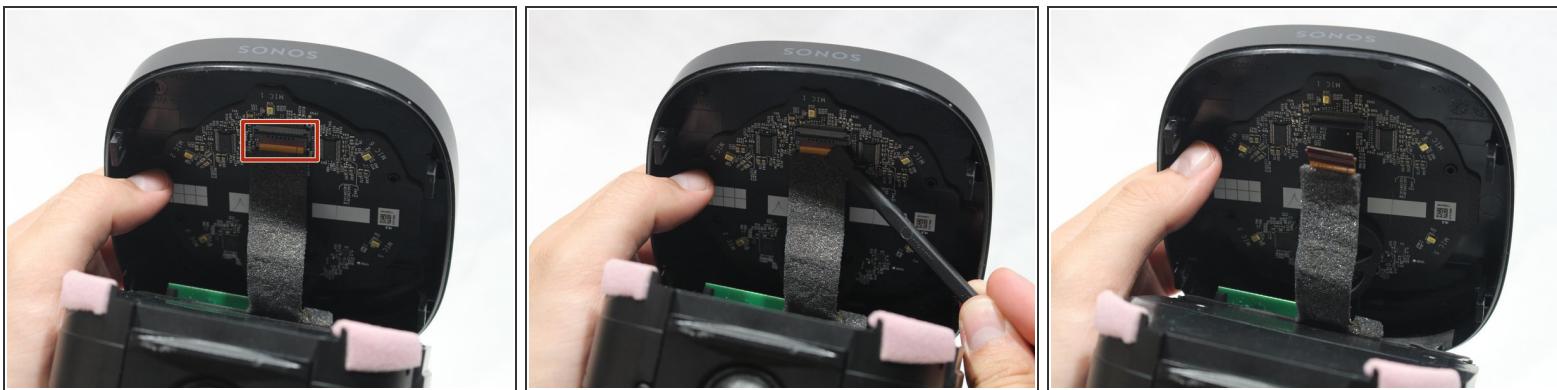


- Use a spudger to flip up the retaining flap on the control panel ribbon cable [ZIF](#) socket.
- Pull the control panel ribbon cable out of its socket.

Step 9

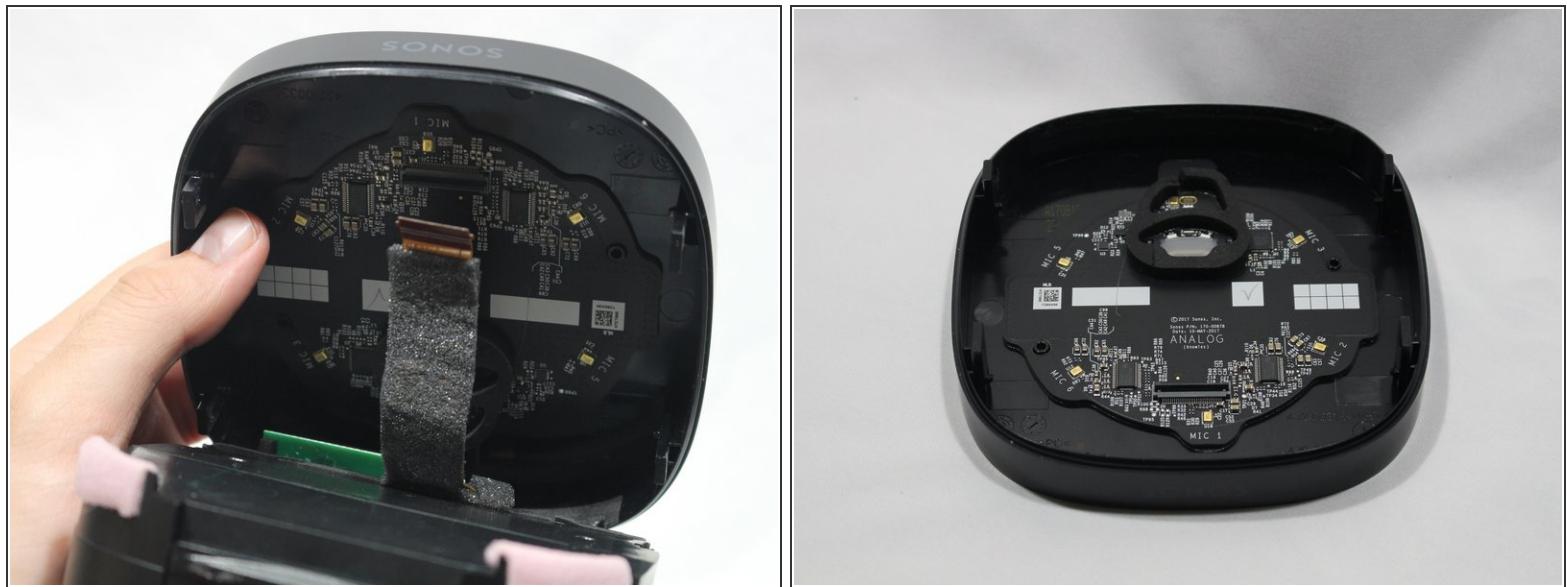

- Pull the control panel away from the speaker to separate.

Step 10 — Power Adapter Receptacle

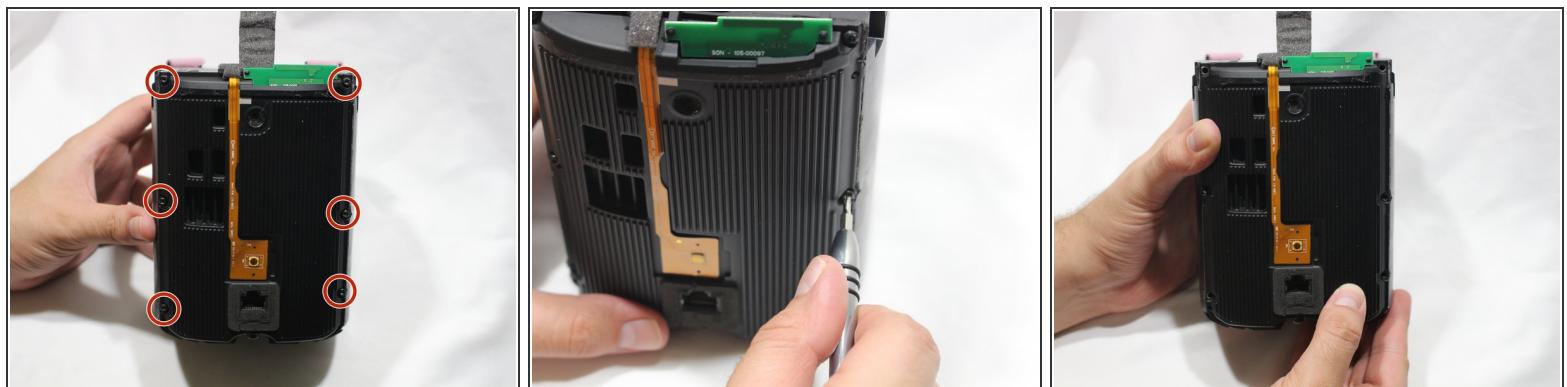

- Remove the six 9mm Torx T8 screws from the motherboard panel.

Step 11



- Using a plastic opening tool, separate the motherboard from the speaker.

Step 12




- Using your thumb, disconnect the speaker cable from the motherboard.

Step 13




- Disconnect the power adapter plug from the motherboard using your thumb.

Step 14

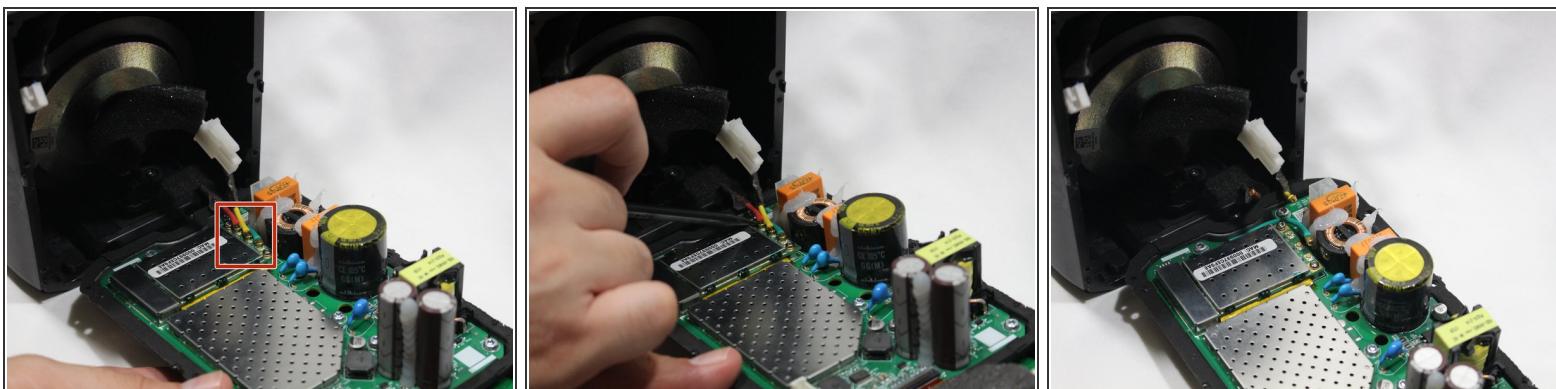

- Using the pointed end of the spudger, disconnect the red, green, and yellow cables connecting the WiFi transmitter/receiver.

Step 15

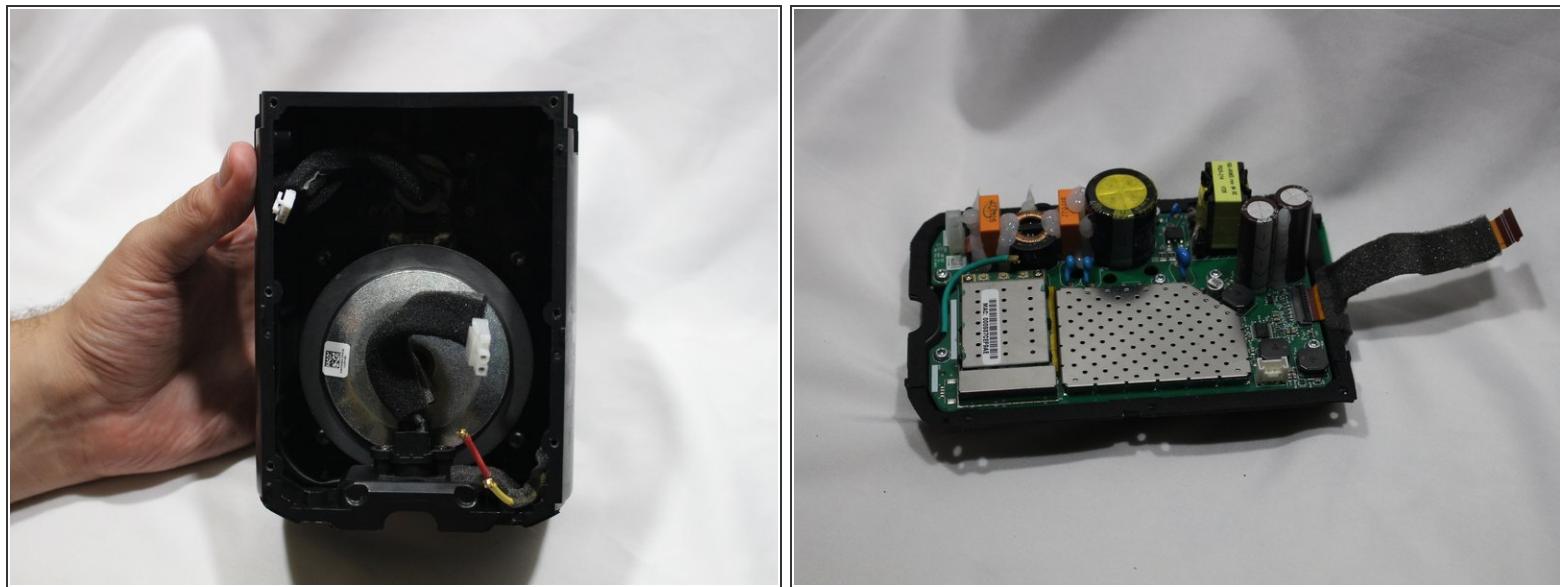

- Remove the motherboard panel from the speaker housing.

Step 16



(i) The woofer is highly magnetic, making removal of the metal screws sometimes difficult.

- Remove the two 9mm Torx T8 screws from the power adapter plug.
- Remove the power adapter receptacle from its housing slot.

Step 17 — Tweeter Diaphragm




- Disconnect the woofer cables.
- ⓘ If removing the tabs is difficult, the flat end of the spudger may be used to depress the middle tab and then the tab may be pulled to disconnect.

Step 18



- Disconnect the cables from the tweeter.

Step 19

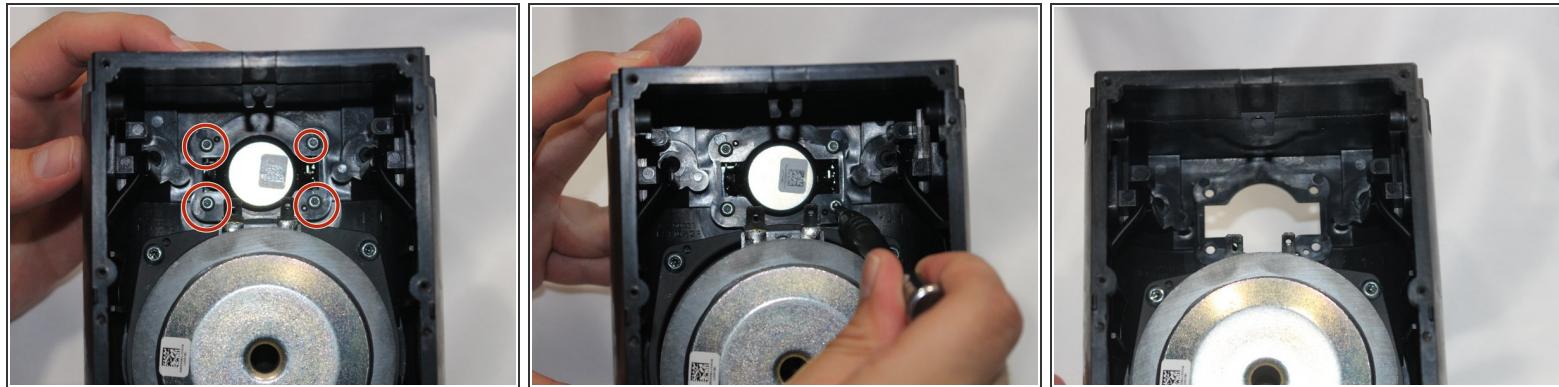

- Remove the four 10mm Torx T10 screws from the tweeter.
- Remove the tweeter from the speaker housing.

To reassemble your device, follow these instructions in reverse order.