



# Sony AZ1VR Lens O Ring Replacement

This O Ring helps keep the device water proof. Overtime it could wear down and cause a leak.  
Here's how to replace it.


Written By: Michael Martin



 **TOOLS:**

- Mako Driver Kit - 64 Precision Bits (1)

## Step 1 — Lens O Ring

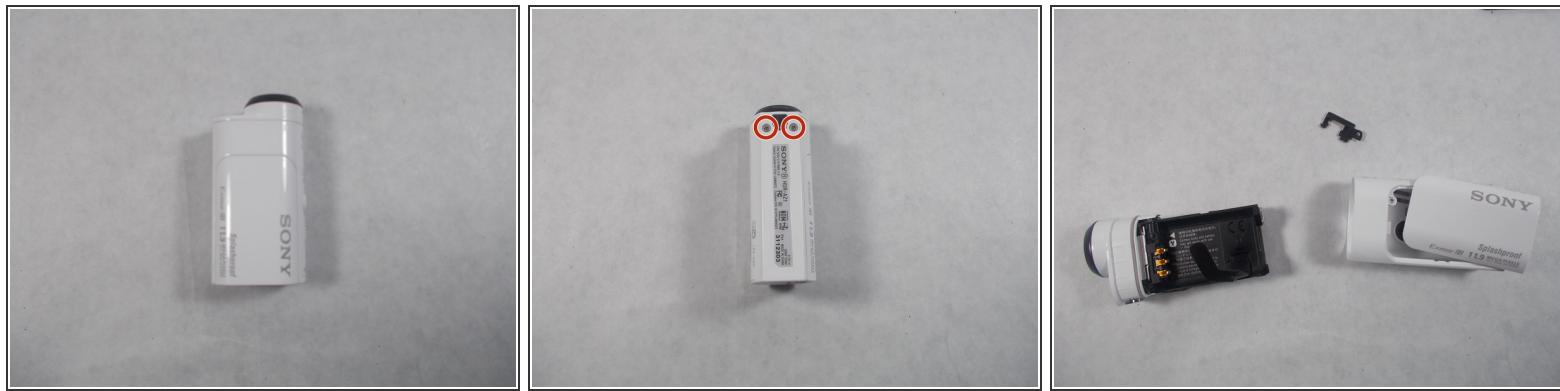

- Start by removing the two screws on the bottom, and the screw inside the battery room. Once these are removed, slide the door out, and the small piece of plastic with the door.

## Step 2



- Now, grab the lens and pull the body out of the plastic, this will reveal the insides of the device. You'll see a screw on the top of the device, towards the front, remove this screw. Next pull the tabs on the bottom and top of the lens, and pull outward, this will remove the lens housing from the body.

## Step 3



- Next, you'll see a white ring around the lens, slowly remove that ring without causing damage to the device. Now put the new one in its place. Now reassemble the device, it's all set to be used.

To reassemble your device, follow these instructions in reverse order.