



Sony Ericsson K750i Keypad Replacement

This guide will demonstrate the procedures involved in removing or replacing the keypad of the Sony Ericsson K750i cell phone.

Written By: Abby Evers



INTRODUCTION

Please note: you must remove the screws from the back casing before beginning this guide.

TOOLS:

- [Phillips #0 Screwdriver](#) (1)
- [Flathead 3/32" or 2.5 mm Screwdriver](#) (1)
- [T6 Torx Screwdriver](#) (1)

Step 1 — Back Casing



- Remove two Phillips #0 screws from the battery chamber.
- Remove two Torx T6 screws from the battery chamber.


Step 2



- Gently pry off the back casing.

i Work an opening tool around the entire seam before attempting to pull off the casing. This action will reduce the chance of cracking the casing.

Step 3

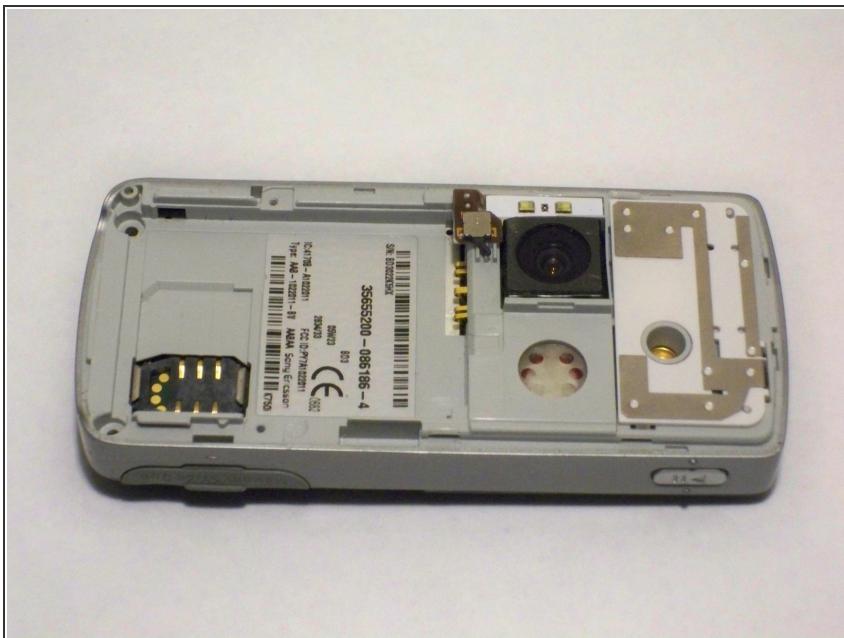

- Remove the casing to expose the camera's components.

Step 4 — Keypad



- Gently pry open the front casing by working an opening tool along the entire seam.

Step 5



- Remove the front casing by gently lifting it from the phone.
- *i* Be careful not to pull off any other delicate pieces.

Step 6



- Remove the keypad.

⚠ The LCD screen is very fragile. Be careful not to catch the keypad on it while removing.

To reassemble your device, follow these instructions in reverse order.