




Sony Ericsson K750i LCD Screen Replacement

This guide will demonstrate how to remove or replace the LCD Screen in the Sony Ericsson K750i.

Written By: Abby Evers

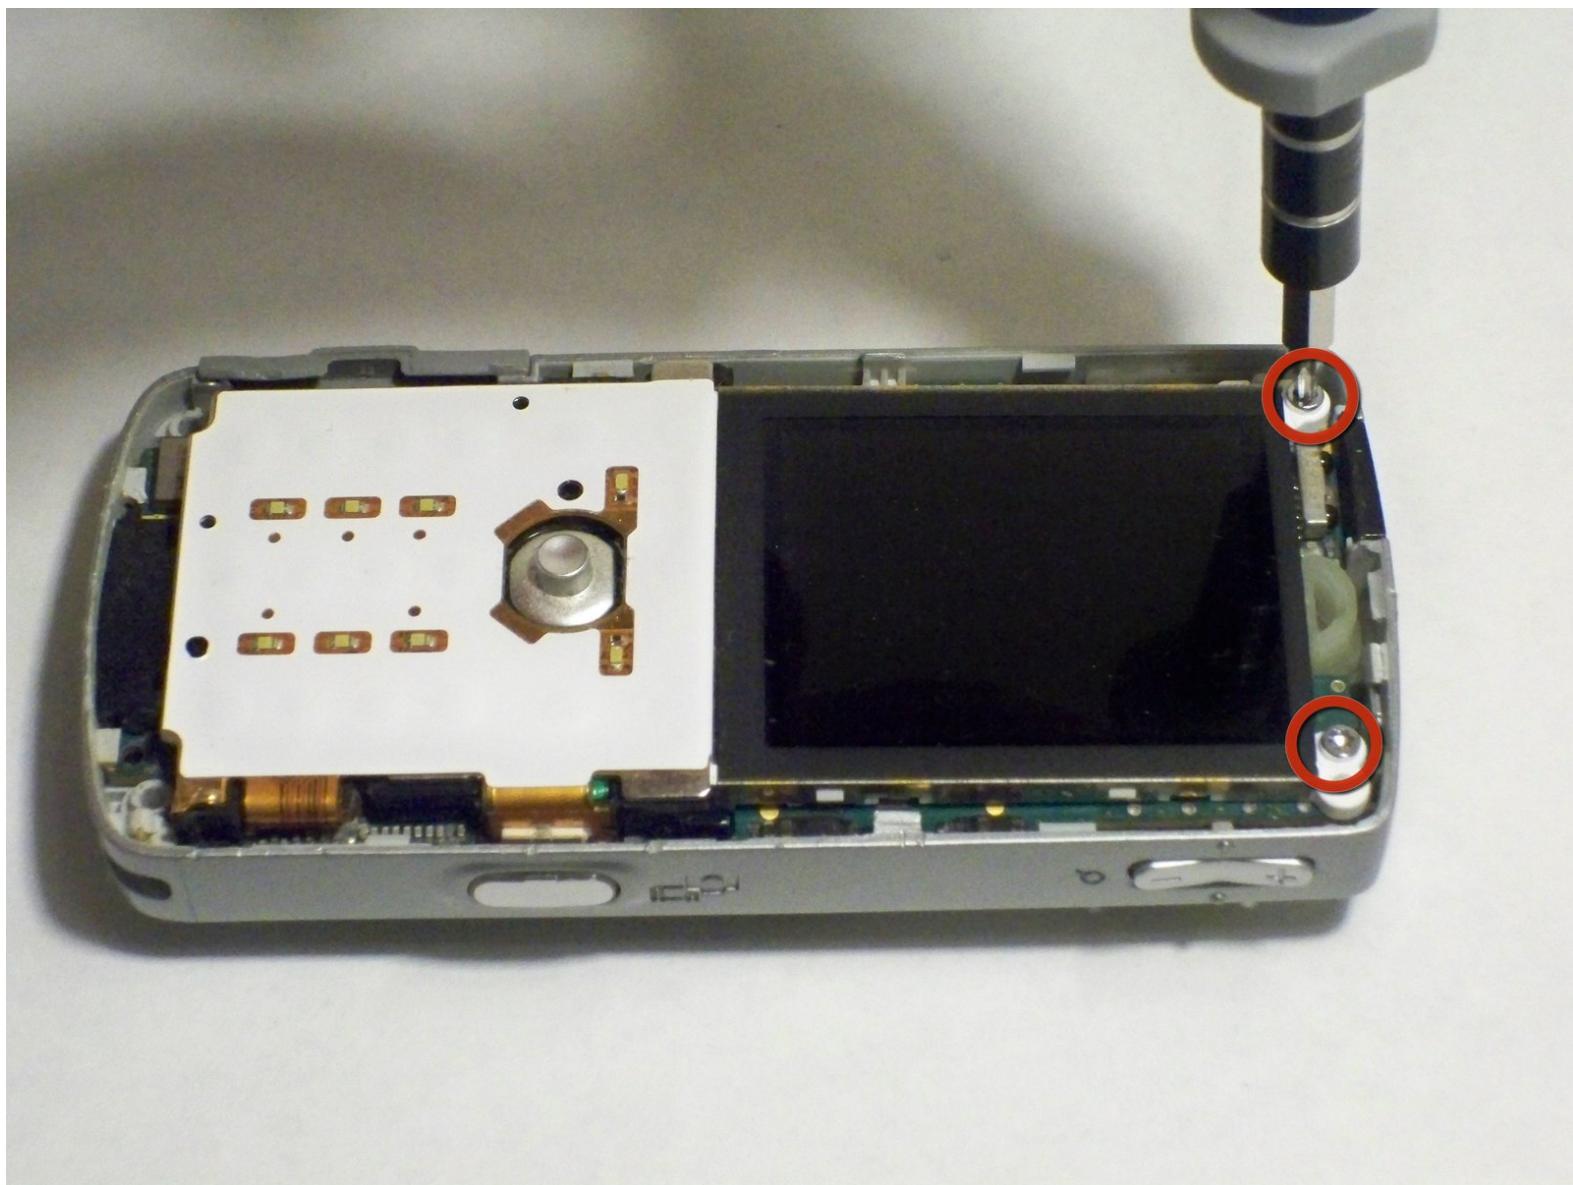

 **TOOLS:**


- **Phillips #0 Screwdriver (1)**
- **Flathead 3/32" or 2.5 mm Screwdriver (1)**
- **T6 Torx Screwdriver (1)**
- **Tweezers (1)**

Step 1 — Battery Cover



- Remove the battery cover.
- Press down firmly with your thumb and slide the cover back.

Step 2 — Back Casing

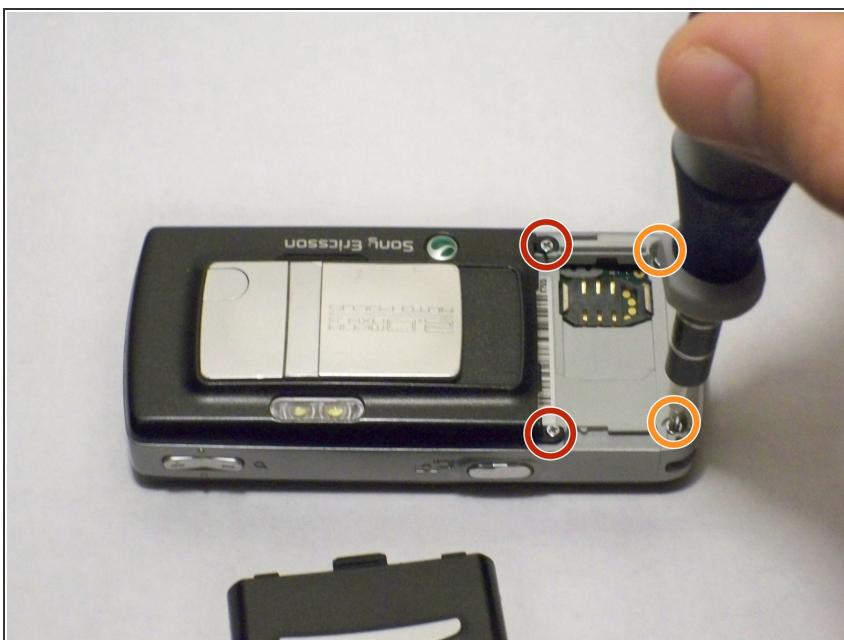


- Remove two Phillips #0 screws from the battery chamber.
- Remove two Torx T6 screws from the battery chamber.

Step 3



- Gently pry off the back casing.
- *(i)* Work an opening tool around the entire seam before attempting to pull off the casing. This action will reduce the chance of cracking the casing.

Step 4

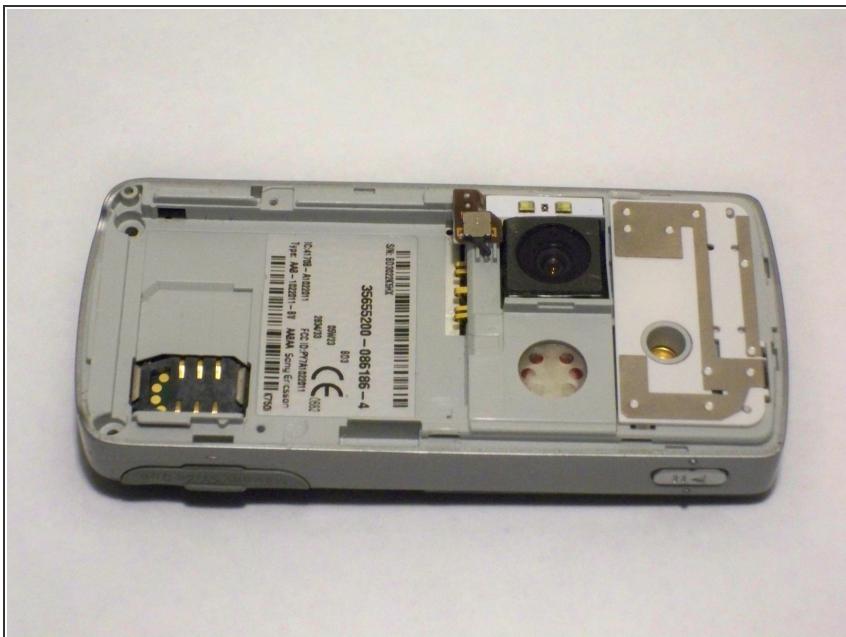

- Remove the casing to expose the camera's components.

Step 5 — Keypad



- Gently pry open the front casing by working an opening tool along the entire seam.


Step 6



- Remove the front casing by gently lifting it from the phone.

i Be careful not to pull off any other delicate pieces.


Step 7

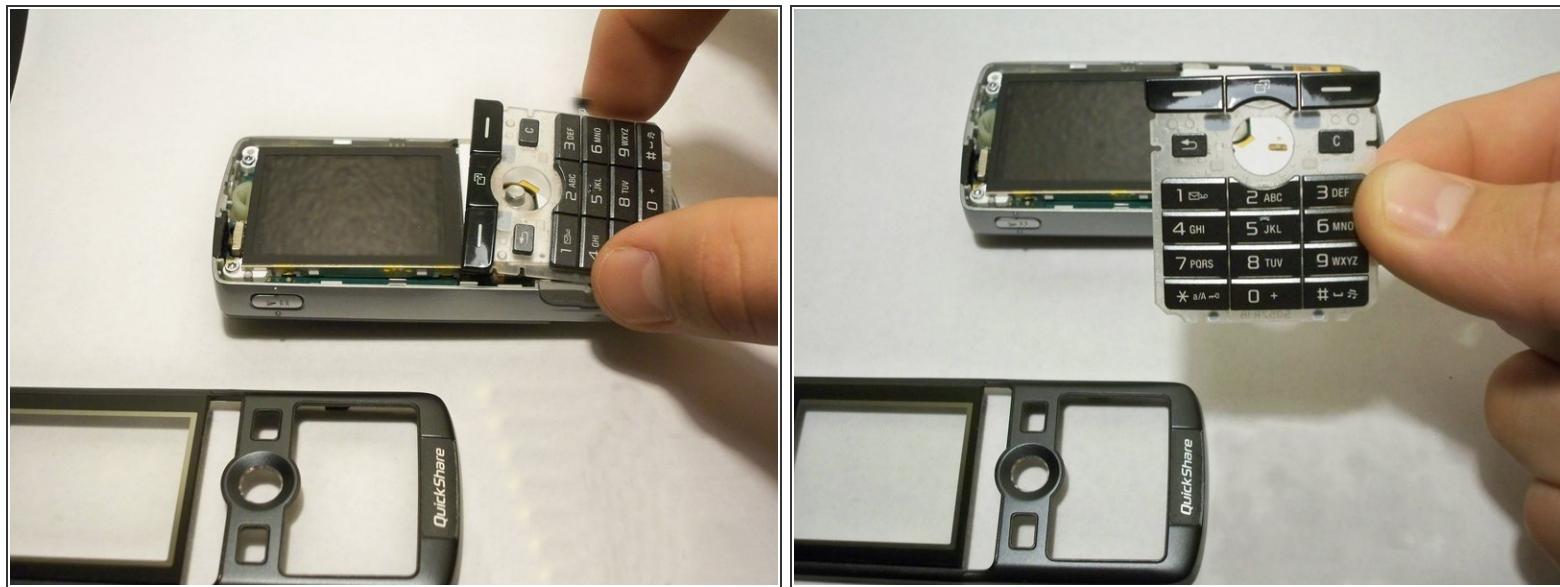

- Remove the keypad.


⚠ The LCD screen is very fragile. Be careful not to catch the keypad on it while removing.

Step 8 — LCD Screen

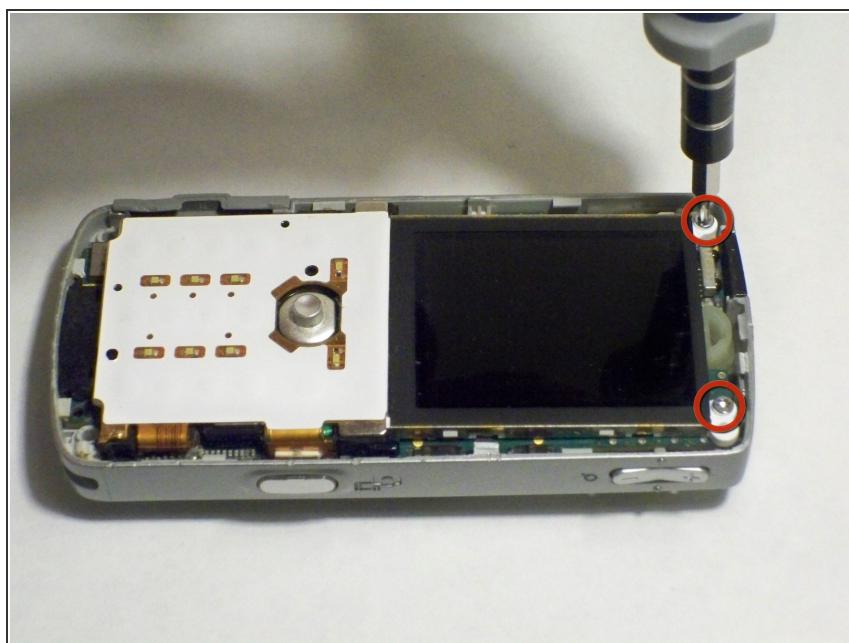


- Remove the screws holding the screen in place.

Step 9

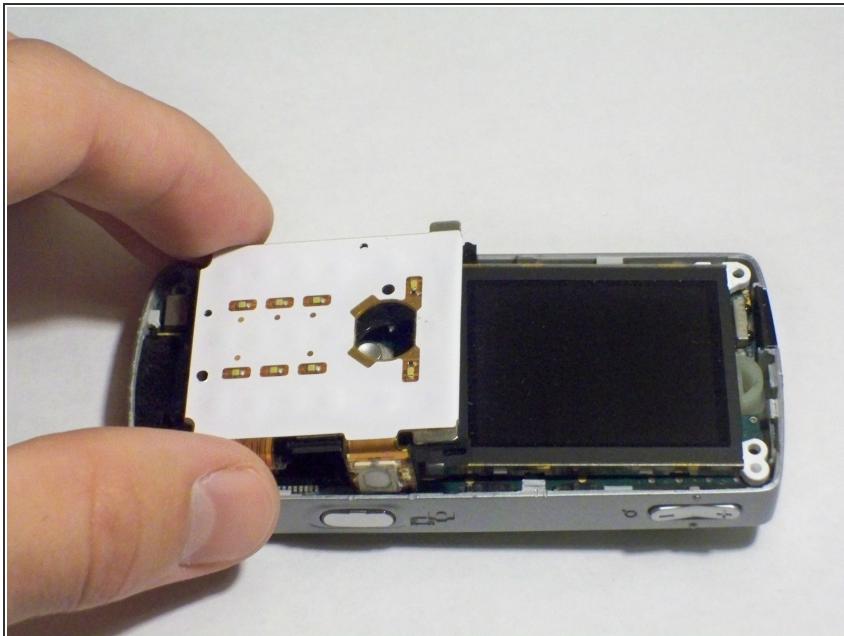

- Gently lift the base of the keypad to remove it.

Step 10

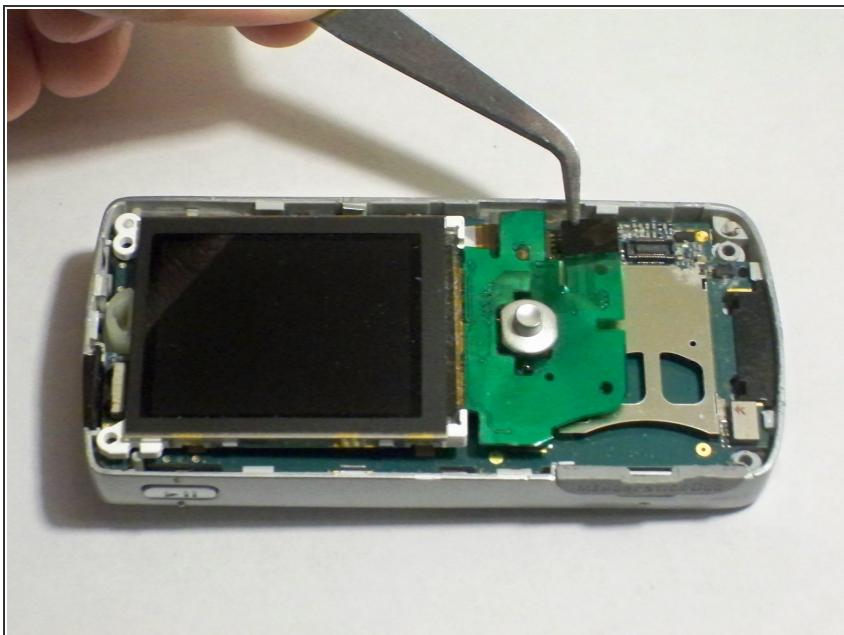

- Gently pull up the green film, avoiding the joystick.

i The LCD screen will be attached to this film and come off with it.

To reassemble your device, follow these instructions in reverse order.