




# Sony Ericsson T68i Screen Replacement

Written By: Tim Dascomb

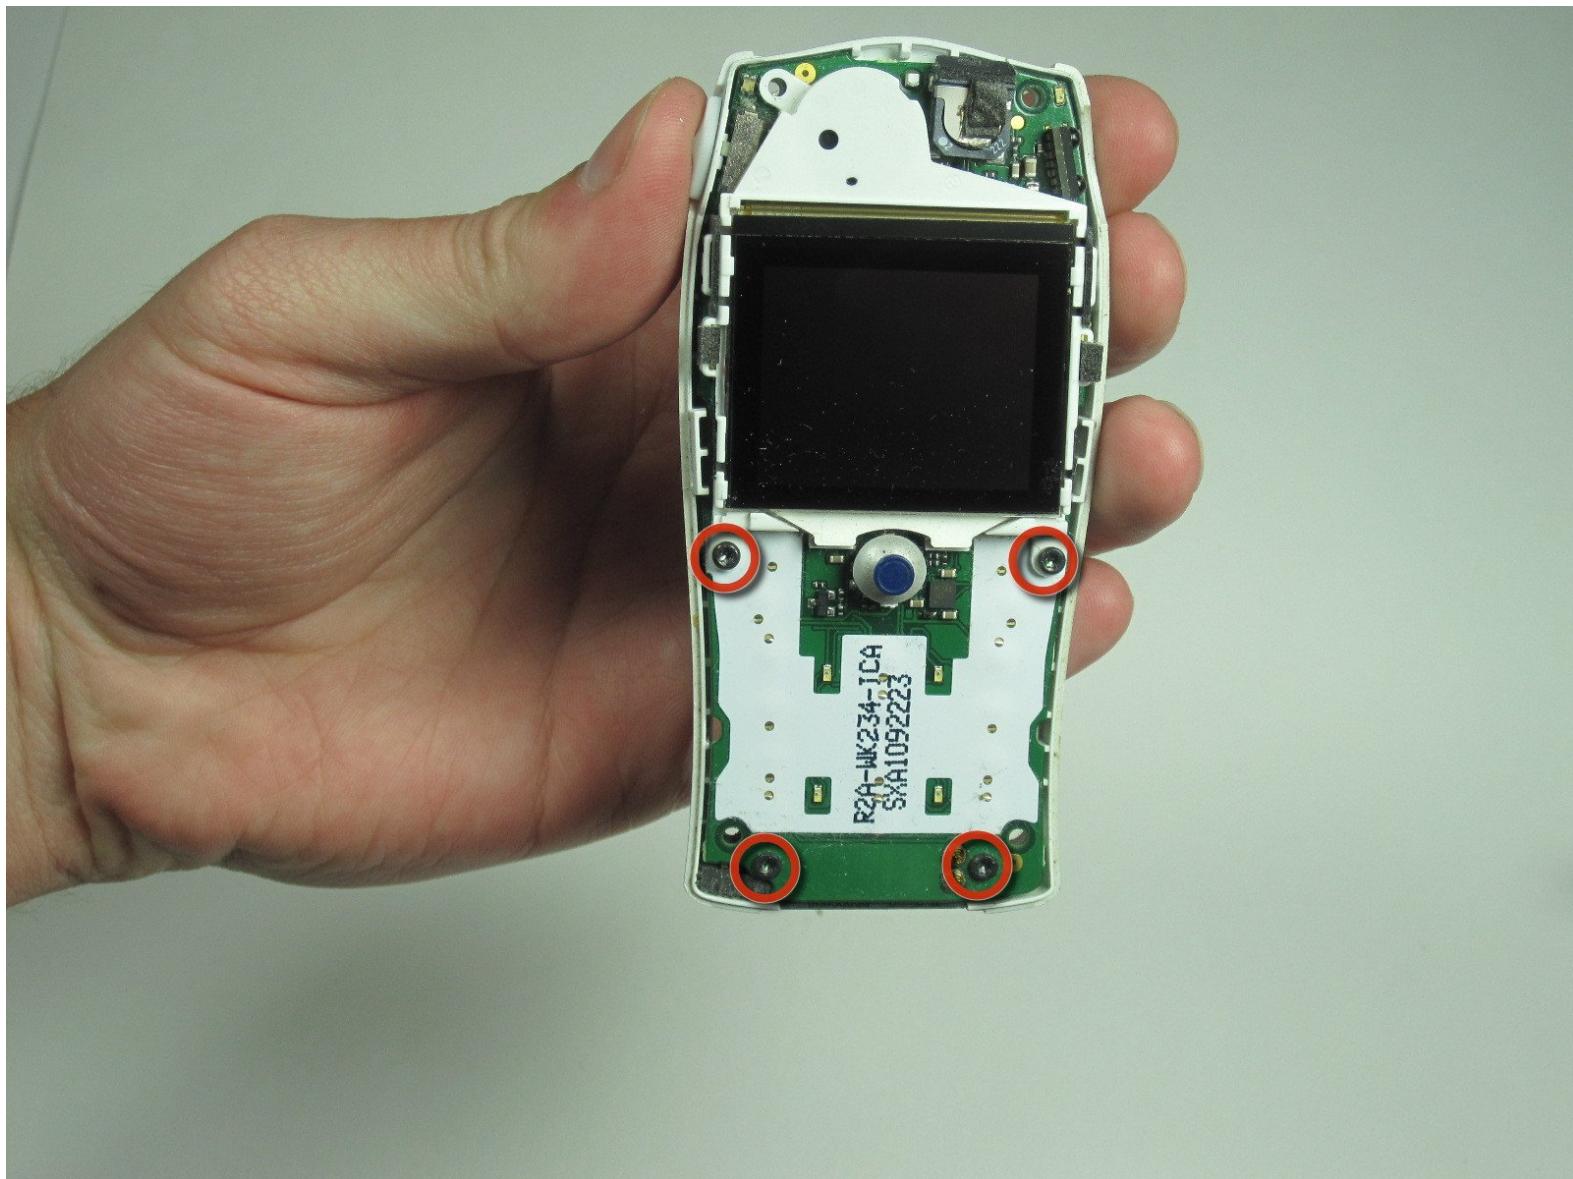

## INTRODUCTION

This guide will assist you in removing the screen from your Sony Ericsson T68i.

### TOOLS:

- [iFixit Opening Tools](#) (1)
- [T6 Torx Screwdriver](#) (1)

## Step 1 — Keypad



- Remove the battery from the back.

## Step 2



- Pry off the plastic cover from the top with a thin plastic shim, then remove it from the two bottom clips.

⚠ Do not bend it too far down, or else you risk breaking the two bottom clips.

## Step 3



- Unscrew all four Torx T6 screws.


- ⓘ Keep in a safe place.

## Step 4




- After removing the screws, the two halves will separate. If not, then pry them gently apart.

## Step 5 — Screen

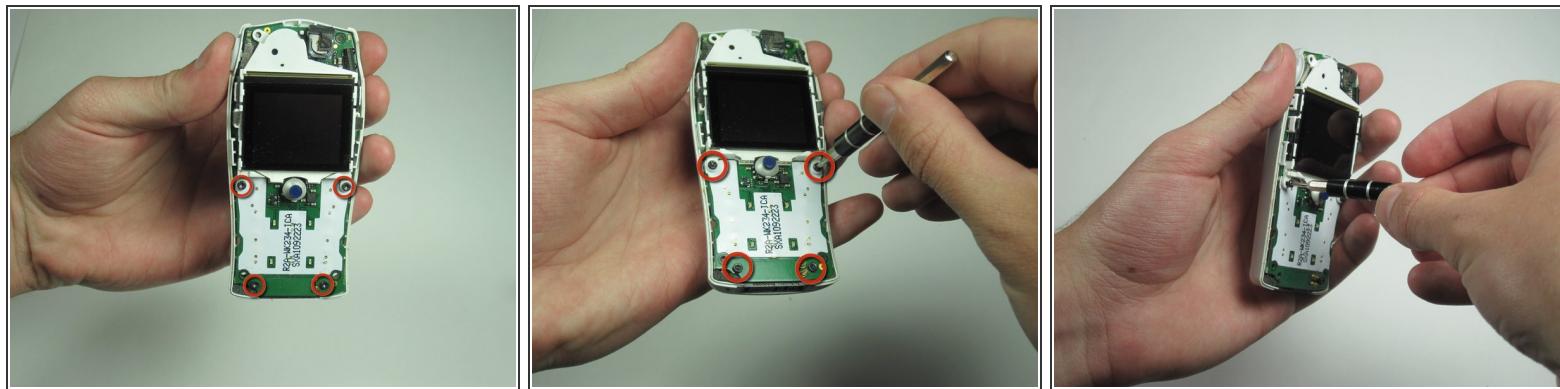


- Remove the circuit board and screen from the device.
- Use your T6 to remove the 4 screws.

## Step 6

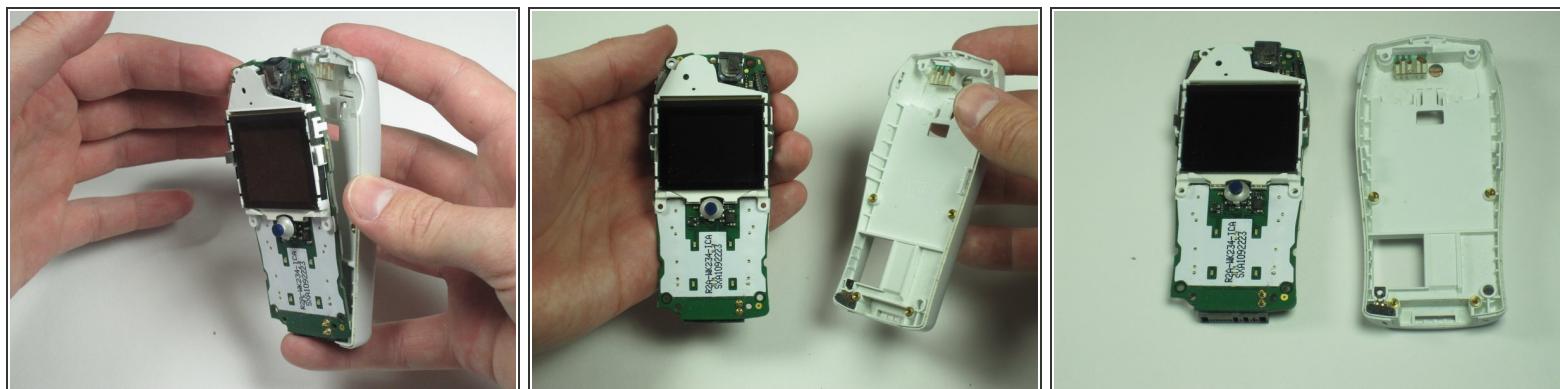

- Remove the board and screen.

## Step 7

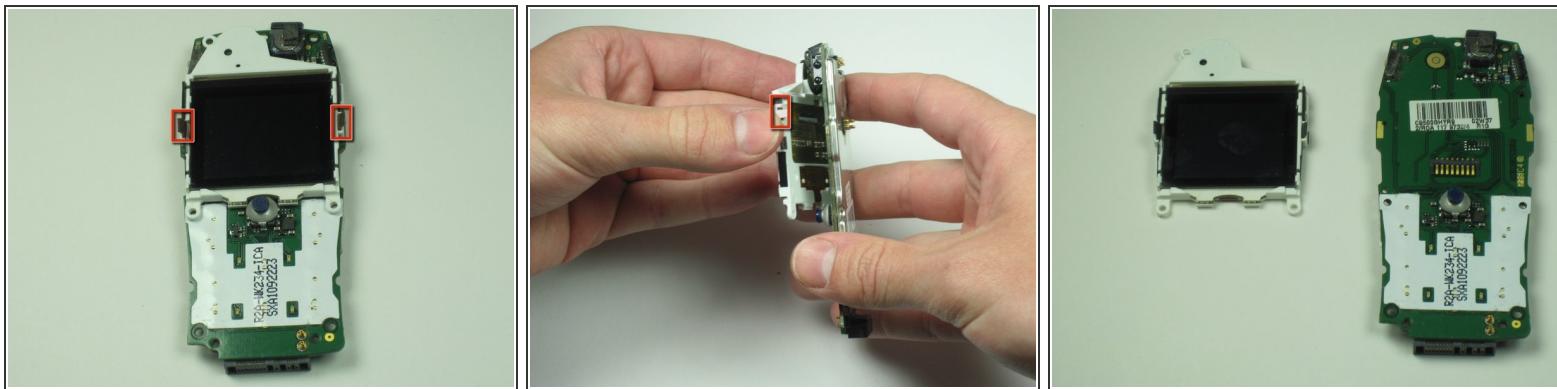

- Carefully remove the plastic clips holding the screen on the board.

To reassemble your device, follow these instructions in reverse order.