



Sony SRS-X5 Speaker Replacement

If the audio sounds distorted, try replacing the speakers.

Written By: Carrie Cutler




INTRODUCTION

This guide will show how to replace the speaker component of the Sony SRS-X5.

TOOLS:

- [Phillips #1 Screwdriver \(1\)](#)
- [iFixit Opening Tools \(1\)](#)

Step 1 — Battery

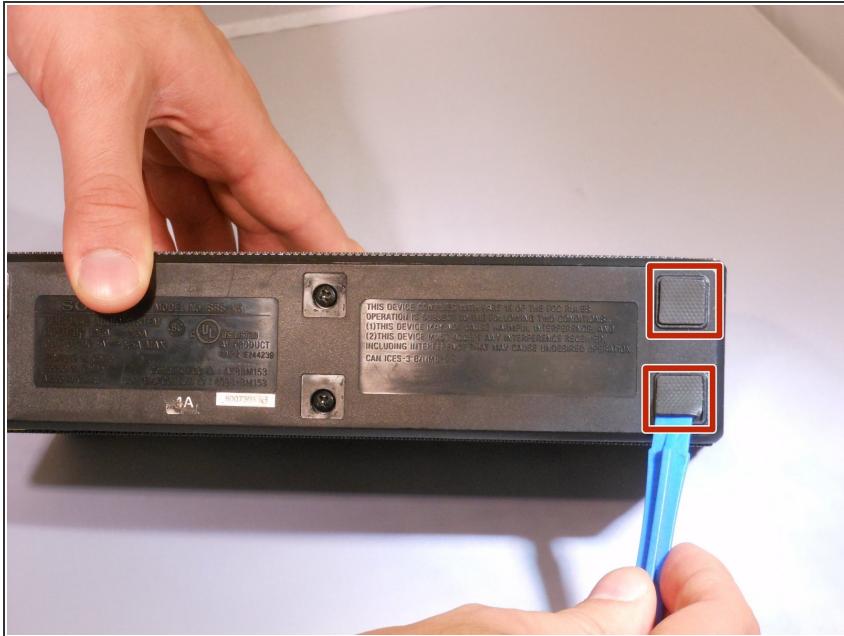

- Remove the pads on the bottom of the speaker using the blue plastic opening tool to reveal the screws underneath.


 Make sure the speaker is unplugged and powered down before doing any work on the device.

Step 2



- Unscrew the six 6mm screws with a Phillips head #1 screwdriver.
- Remove the bottom panel of the speaker.

Step 3

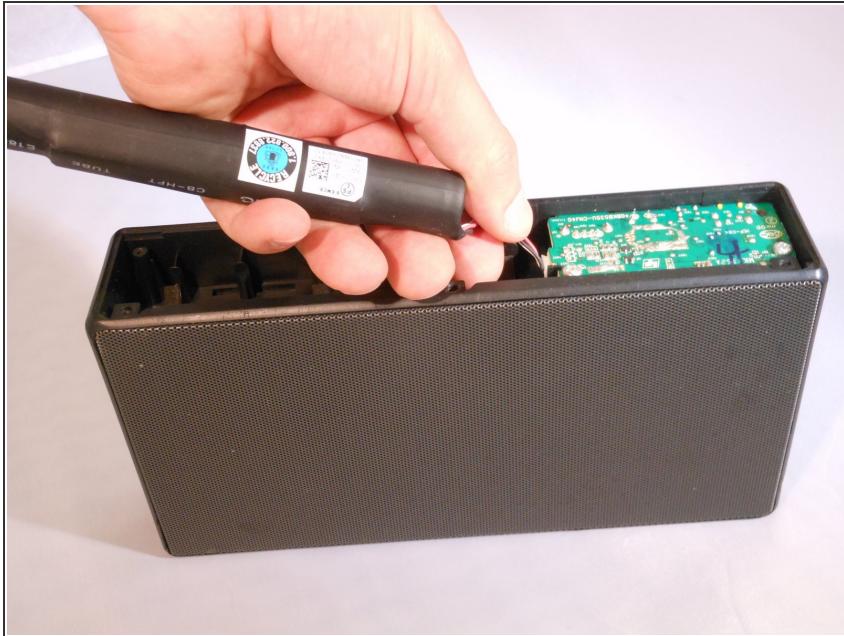


- Unplug the battery by gently pinching the plastic end connected to the smaller board and pull away.
- Remove the battery.

Step 4 — Speaker




- Remove the lower frame by pushing the middle plastic tab upward.

Step 5

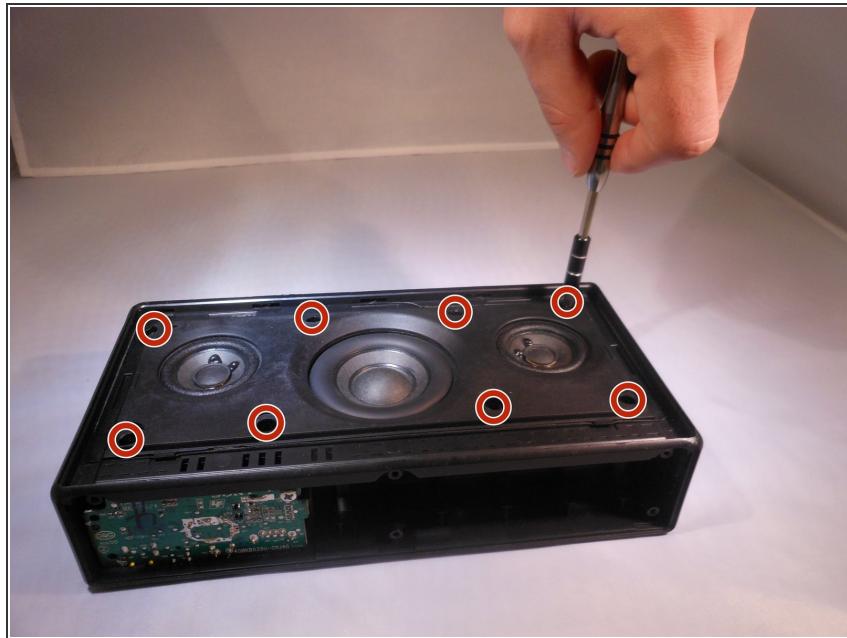

- Remove the eight 0.5mm Phillips #1 screws from the speaker panel.

Step 6

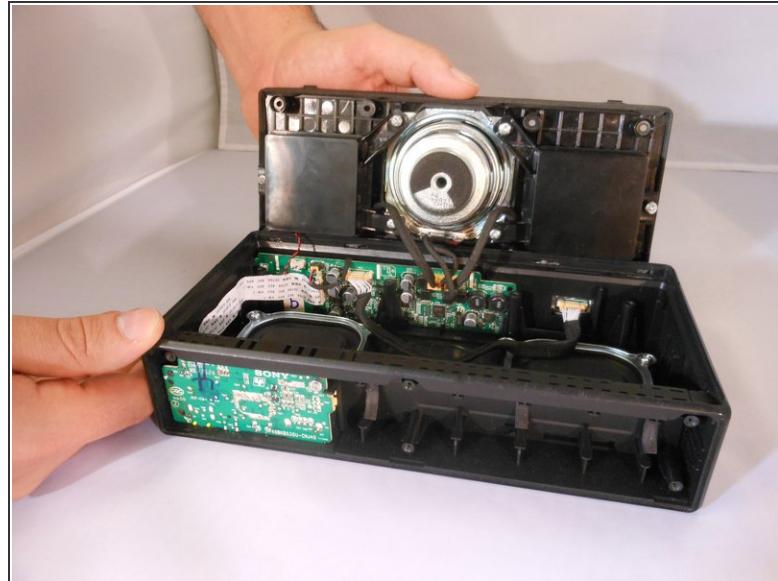

- Using the plastic opening tool, flip open the speaker panel.

Step 7



- Unplug the two cables connecting the speaker to the motherboard by squeezing the sides of the plastic ends.

To reassemble your device, follow these instructions in reverse order.