



Sony VAIO PCG-3E2L Hard Drive Replacement

The purpose of this guide is to help the reader replace the Hard Drive of the device.

Written By: Chengyang Chen



INTRODUCTION

This guide will aid readers to replace or upgrade Hard Drive of the device when the Hard Drive is not functioning properly.

TOOLS:

- [Phillips #00 Screwdriver \(1\)](#)

PARTS:

- [2.5" Serial ATA Hard Drive \(1\)](#)

Step 1 — Hard Drive



- Using a #00 Phillips screwdriver, remove the screw

Step 2



- Remove the cover

Step 3



- Using a #00 Phillips screwdriver, remove the screw



Step 4



- Grab the black plastic handle and pull the hard drive out slowly.

⚠ Only pull the hard drive horizontally. Do not lift the hard drive vertically

Step 5

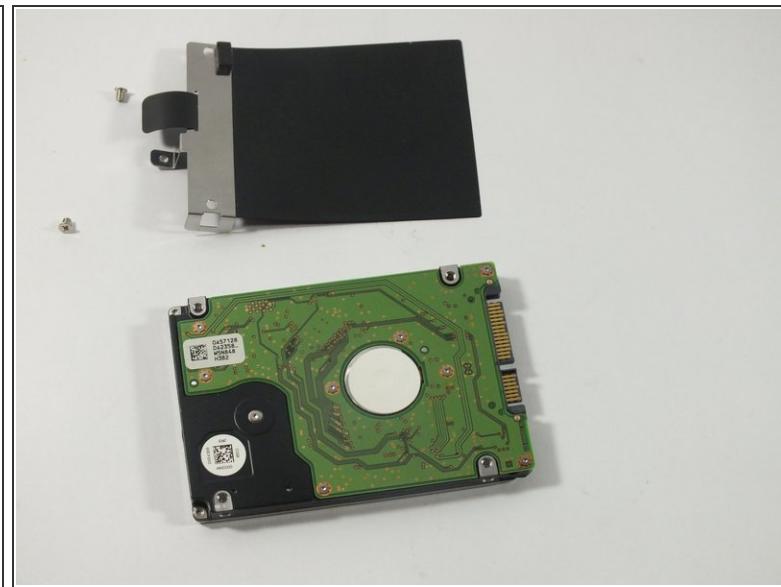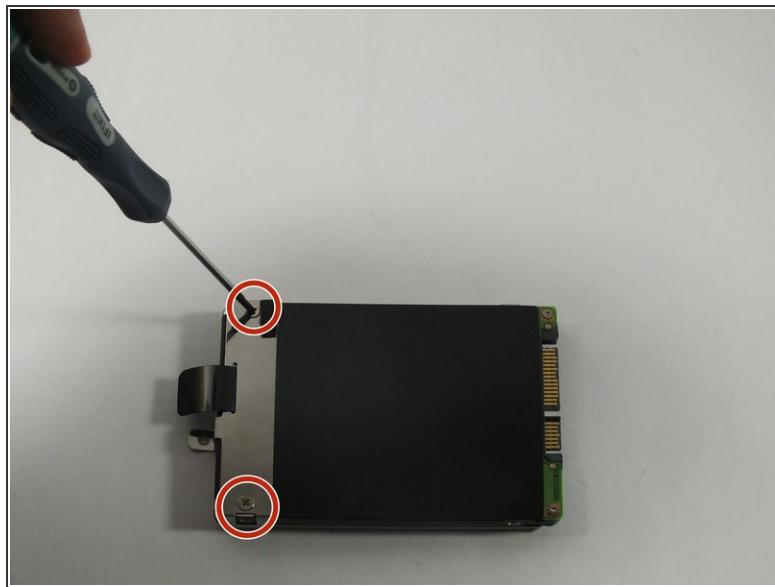

- Using a #00 Phillips screwdriver, remove the screw

To reassemble your device, follow these instructions in reverse order.