




Sony Vaio PCG-71312I RAM Replacement

Follow this guide to remove RAM for testing or replacement.

Written By: Maxine Filcher

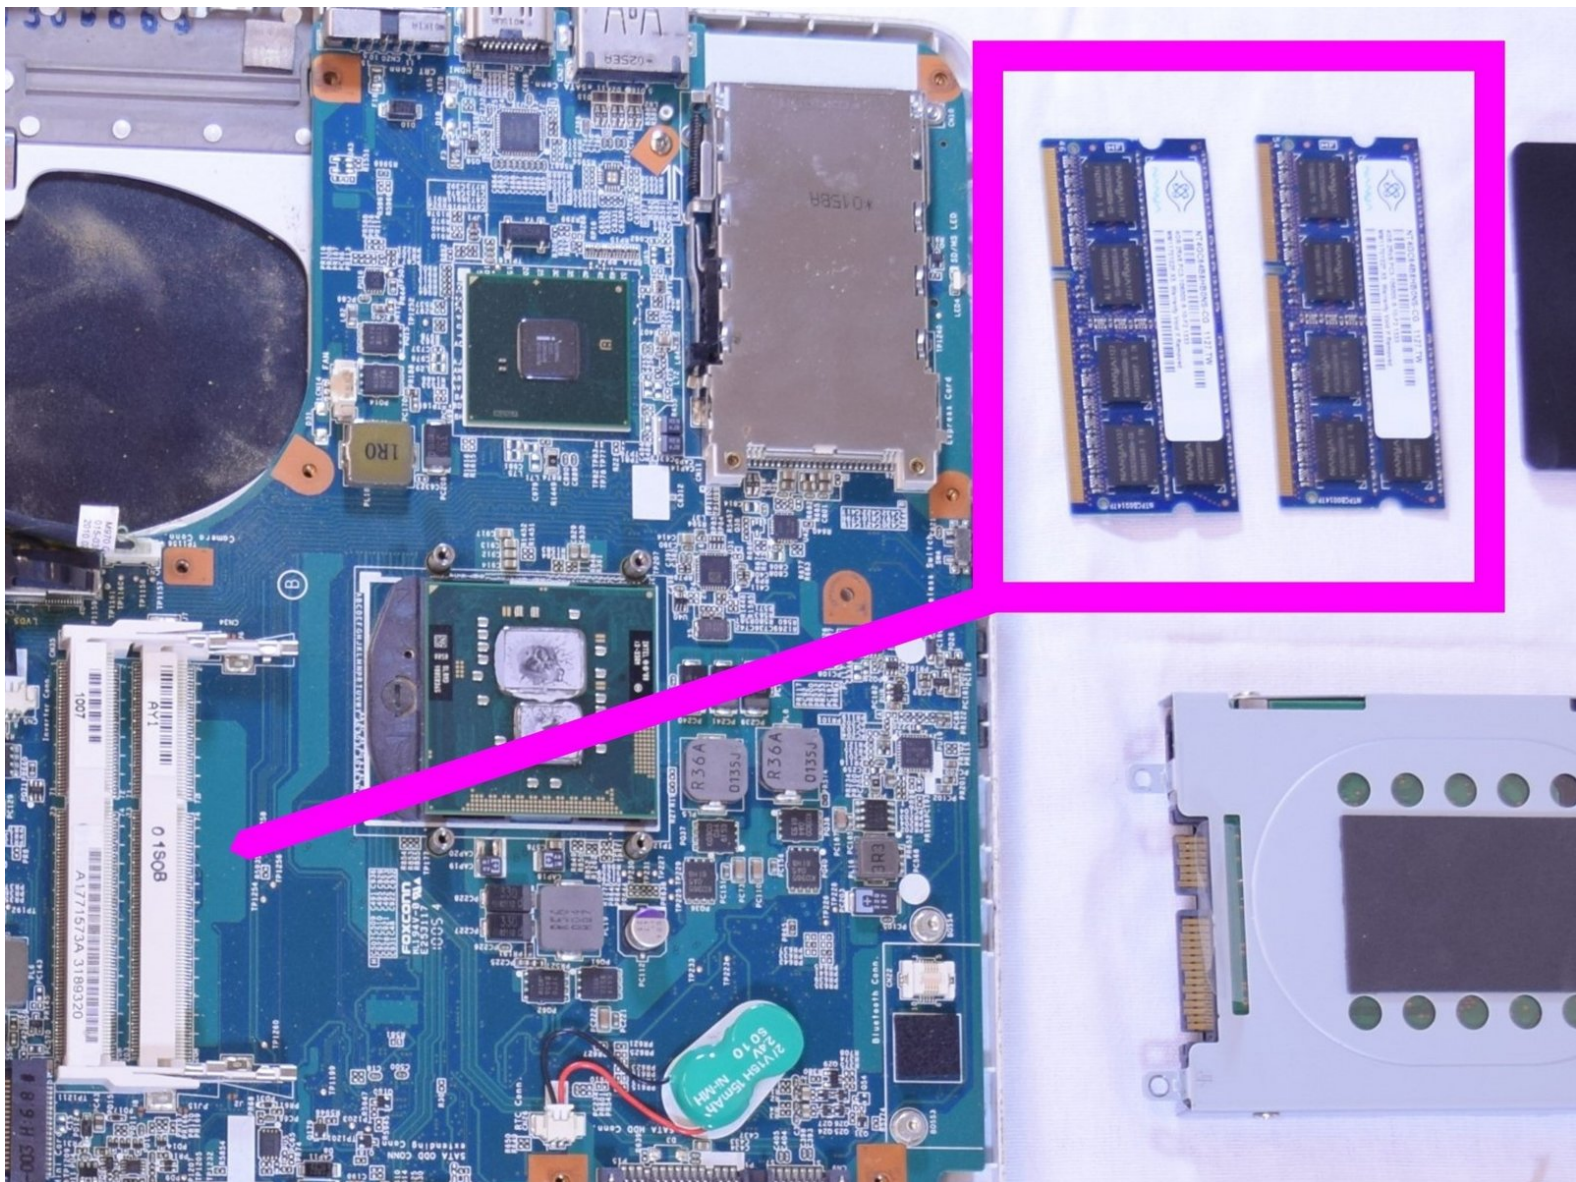

Step 1 — Battery



- ⚠ Power down and disconnect from power supply.
- Use your finger to unlock the tab by pressing the slide away from you.

Step 2



- Hold the release slide, while using thumb to apply upward pressure.

Step 3




- Pull the battery off.

Step 4 — RAM



- Unscrew the RAM case
- The case to pop up once you lose up the case

Step 5

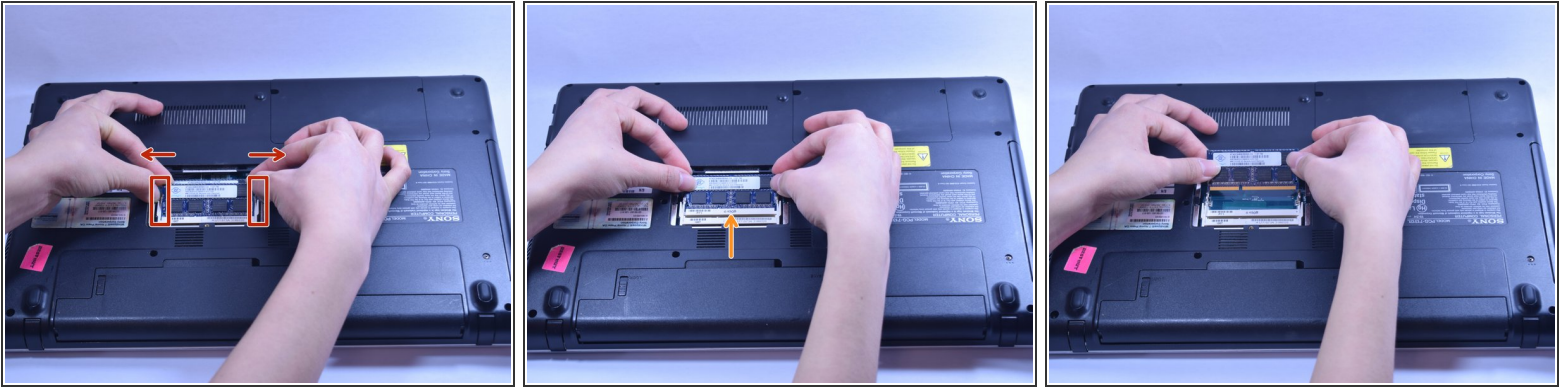

- Use two finger gently to pul the white plastic strap outward with both side.
- Once you pull the strap, the RAM with lose up, you are able to just lift up the RAM
- Once you done with the top, repeat the same step for the bottom

To reassemble your device, follow these instructions in reverse order.