



# Sony Vaio Tap 21 SVT212A11L Screen Replacement

How to remove the screen and LCD panel from the Sony Vaio Tap 21 SVT212A11L.

Written By: Mauricio Retana




## INTRODUCTION

Use this guide to replace the LCD panel and the screen on a Sony Vaio Tap 21 all-in-one desktop. The screen and LCD panel are attached together. It is moderately easy fix that will make your desktop look brand new.

### TOOLS:

- [iFixit Opening Tools](#) (1)
- [JIS #0 Screwdriver](#) (1)


## Step 1 — Screen

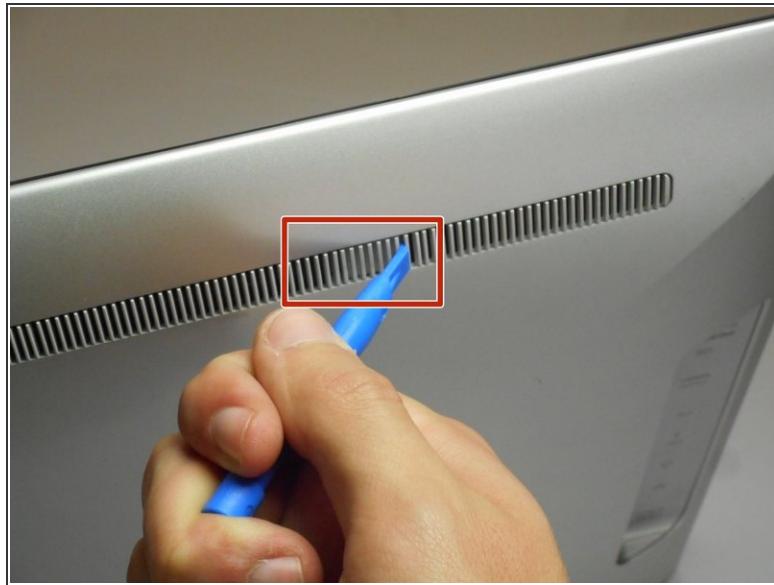

- Insert the plastic opening tool at an angle into the grill and lift the tab by applying force down and to the left as you are lifting it out of place.
- Use your plastic opening tool to remove the right plastic tab blocking the screw mounts behind the device.
- The plastic tab is located on a plastic stretch of grill running along the upper half of the back of the device.

*(i)* You can find the tab looking for a solid fill within the grill. The tab is solid within the slits.

## Step 2

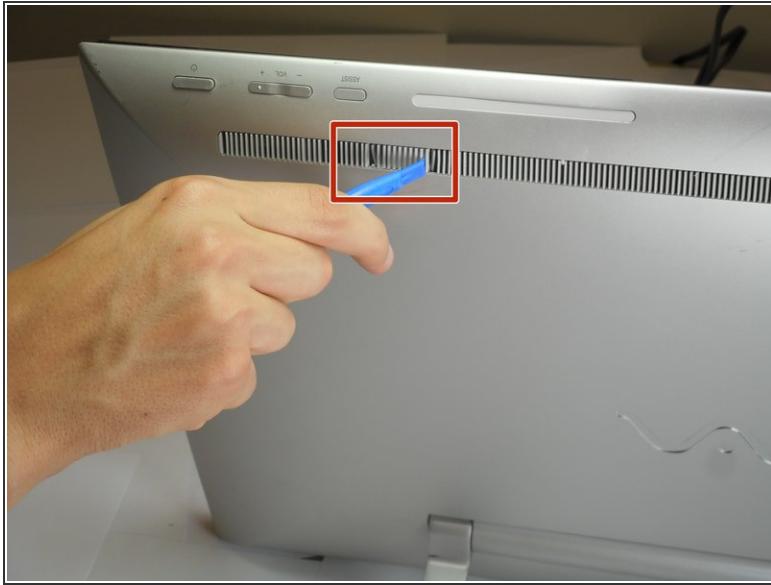

- Insert the plastic opening tool at an angle into the grill and lift the tab by applying force down and to the left as you are lifting it out of place.
- Use your plastic opening tool to remove the right plastic tab blocking the screw mounts behind the device.
- The plastic tab is located on a plastic stretch of grill running along the upper half of the back of the device.

*(i)* You can find the tab looking for a solid fill within the grill. The tab is solid within the slits.

## Step 3



- Remove the two 5mm screws on the back of the device using a JIS 0 screwdriver.

## Step 4



- Face the screen of the device upwards.
- Gently un-clip the screen around the four sides of the body with the plastic opening tool.
- Use an up-down motion.

*(i)* It would be easier to do this if the device is fully rested flat by pushing the device down. It should rest on the stand.

## Step 5



- Lift the screen gently from the top of the device.

*(i)* Make sure to lift the screen from the same side the screws were removed.

## Step 6



- Slowly and gently lay the screen on its face.

**i** It's important that the cables are not damaged while doing this process. Ensure as you lay the screen on its face any cables are carefully moved insuring no stress is applied on the cables.

To reassemble your device, follow these instructions in reverse order.