




Sony Vaio VGN-S260 Speakers Replacement

Written By: Jeffrey Bryan

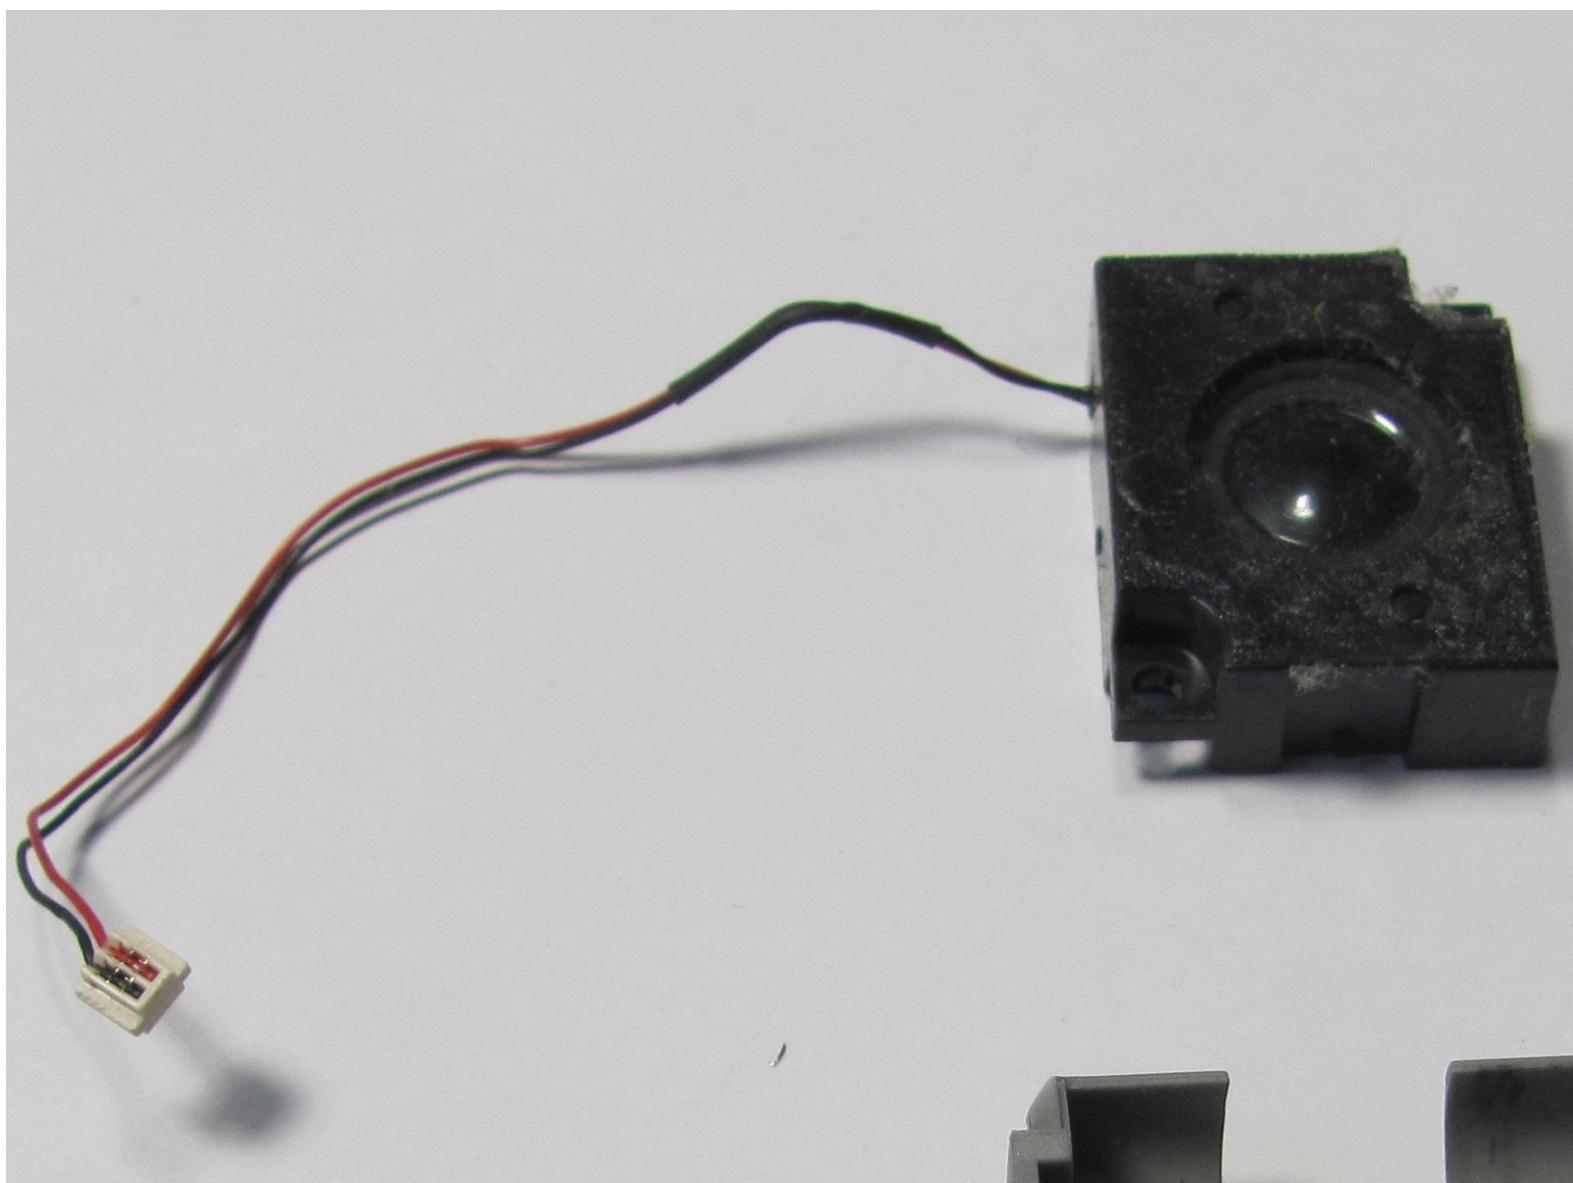

INTRODUCTION

How to take out the speakers of your Sony Vaio VGN-S260

TOOLS:

- [Phillips #00 Screwdriver](#) (1)

Step 1 — Battery



- Flip the laptop over so the Vaio logo is facing down.
- Locate the battery at the top and Find the release and unlock slides on the battery.
- Slide the unlock tab to the unlock position.
- Slide the release tab in the direction of the arrow, i.e. towards the unlock tab.

Step 2



- With the tabs still in the unlock position, slide the battery away from the main case.

Step 3 — Keyboard




- Flip the computer over so the Vaio logo is facedown.
- Unscrew the 2 screws next to the battery.

Step 4



- Flip the computer over again so the Vaio logo is face up.
- Open the lid.



Step 5

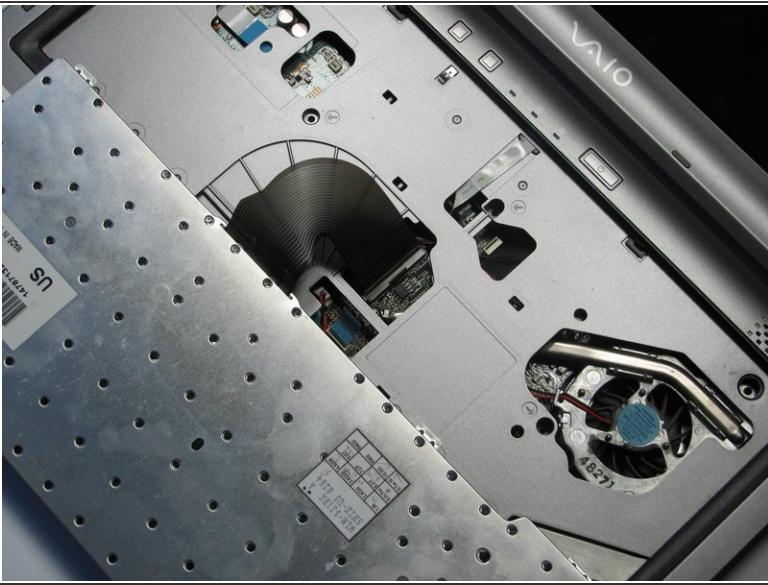

- Press down on the outer gray shell around the keyboard.
- Use the spudger to gently lift keyboard.

⚠ Do not pull up the keyboard too far as it is attached to a ribbon underneath.

Step 6

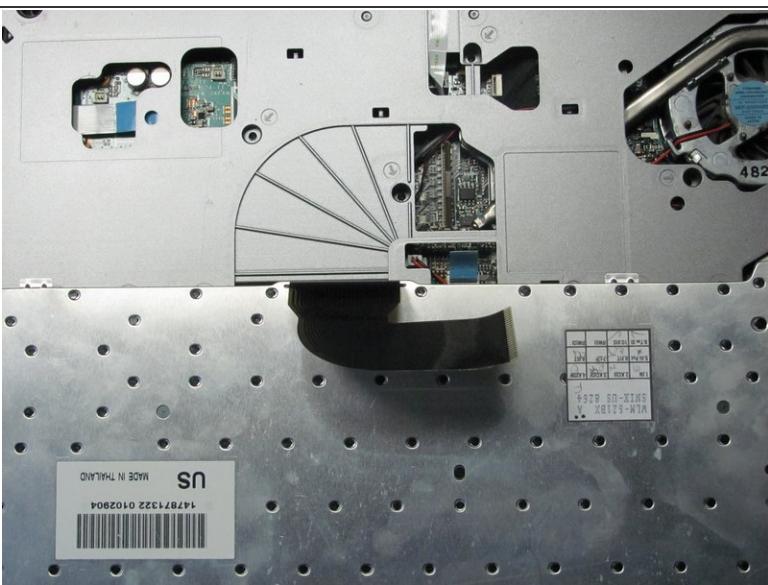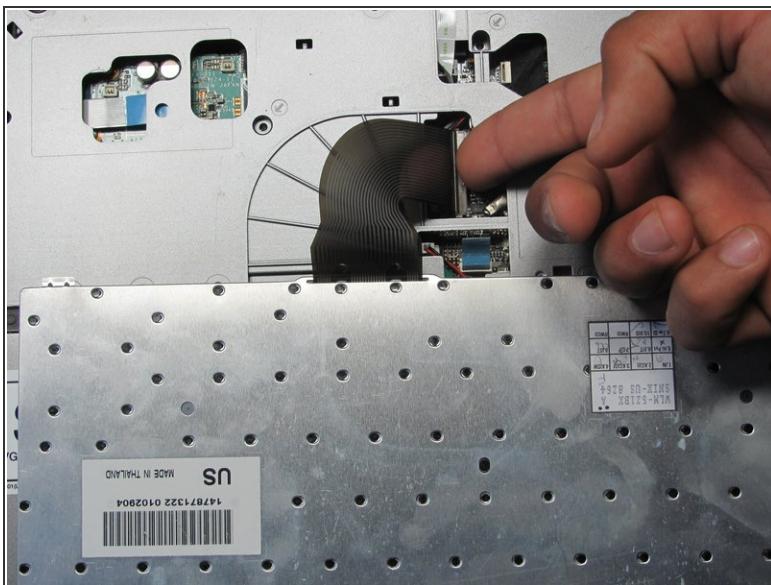

- Lift up lever underneath the ribbon to detach the keyboard.

This document was generated on 2019-09-24 08:18:49 AM (MST).

Step 7 — Upper Casing




- Remove memory/wireless compartment cover.

Step 8




- Flip so the Vaio Logo is face down.
- Locate and remove a total of 8 screws on the bottom.

Step 9

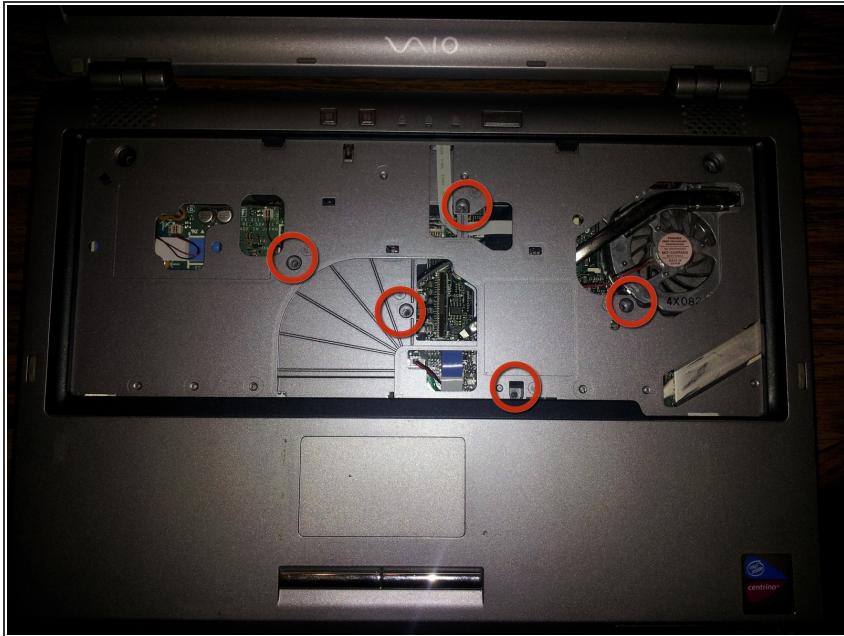

- Find and remove 5 screws (they all have arrows next to them) from cover.

Step 10

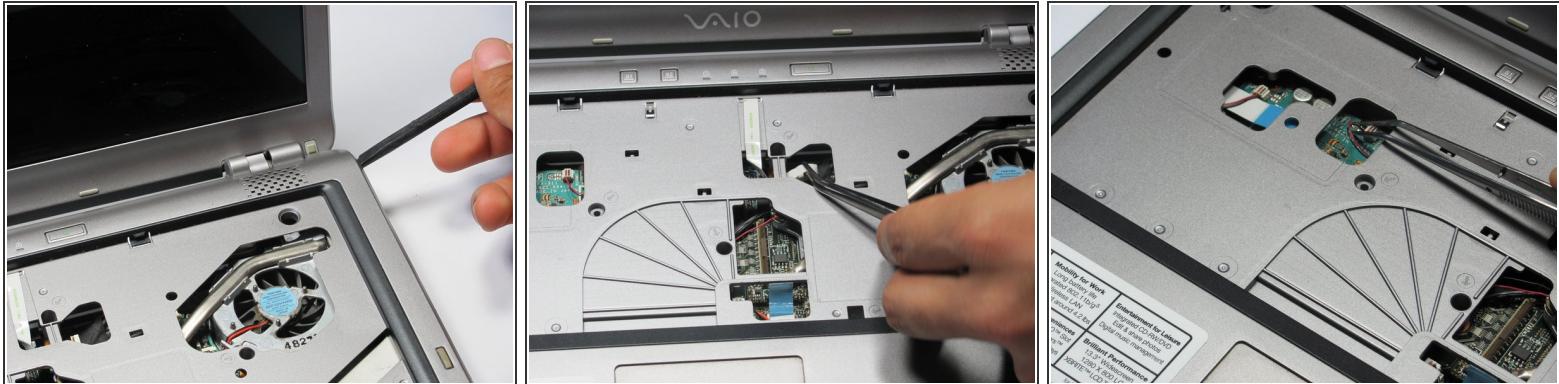

- Flip the laptop over so the Vaio logo is face up.
- Use the spudger to pop up the upper casing.

⚠ Do not lift too much as the upper casing is attached to wires underneath.


- Remove the wires that are attaching the upper casing to the motherboard.

Step 11





- Remove the upper casing.

Step 12 — Speakers

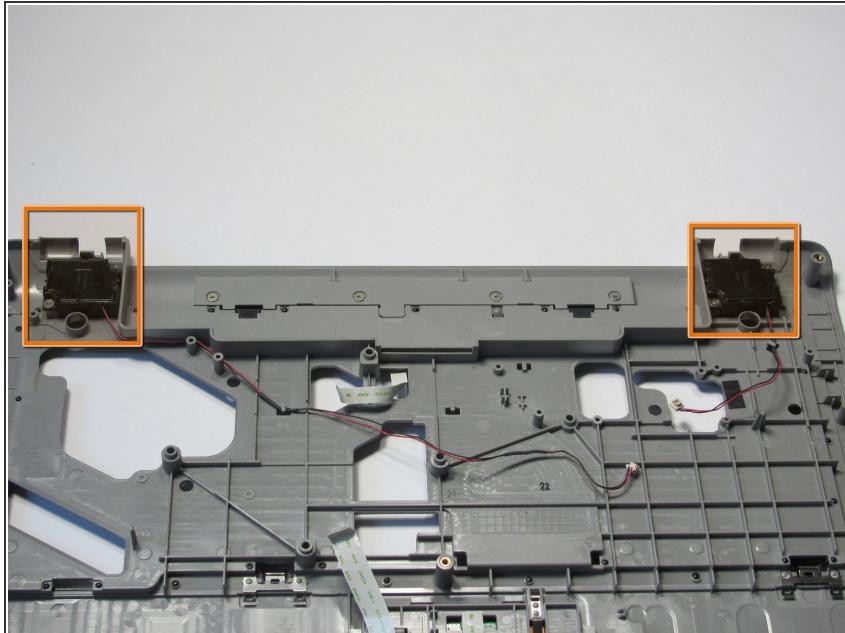

- After removing the Uppercasing, flip it over and locate the two black speakers

Step 13

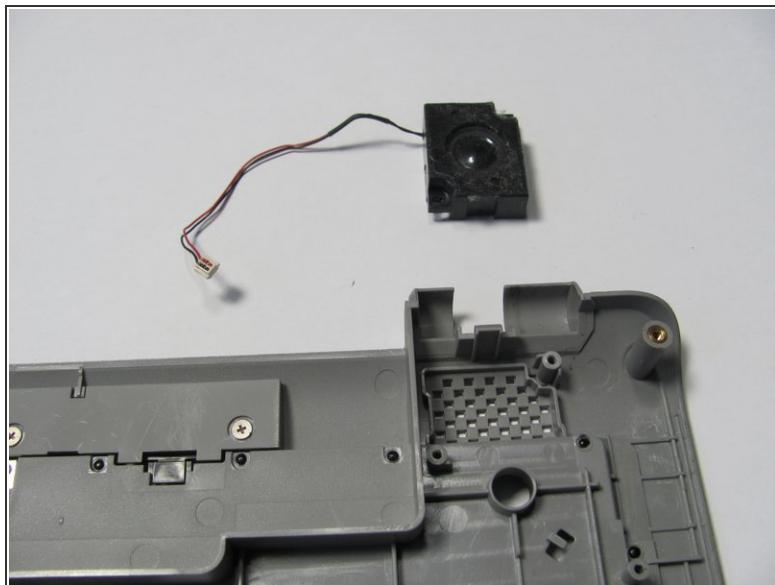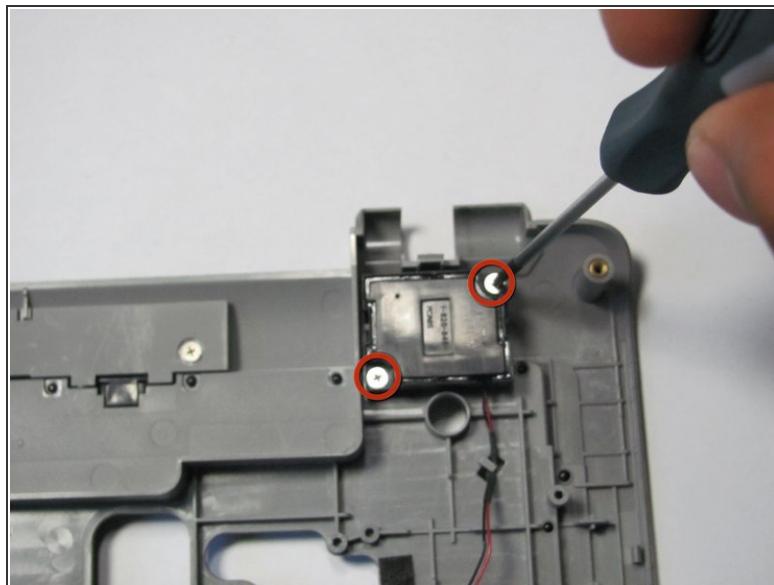

- Remove the screws on the speakers
- *(i)* Each speaker will have two screws
- Remove the speakers

To reassemble your device, follow these instructions in reverse order.