



# Sony Xperia Arc S Teardown

Just a quick view of the internals


Written By: Josh Thomas



 **TOOLS:**


- [T7 Torx Screwdriver \(1\)](#)
- [JIS #00 Screwdriver \(1\)](#)

## Step 1 — Sony Xperia Arc S Teardown

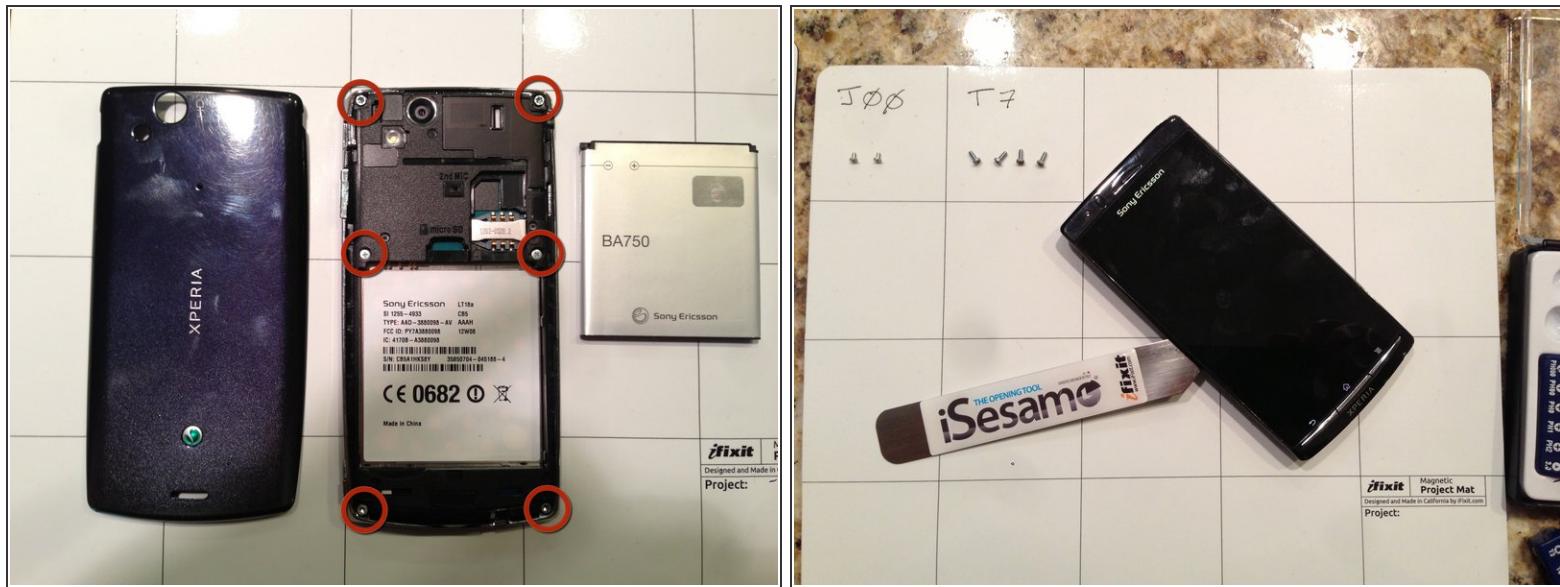



- Pop the back and remove the battery
- Remove the 6 screws from the back (2 x J00 & 4 x T7)
- After the screws are gone, spudge the plastic shielding away.

## Step 2

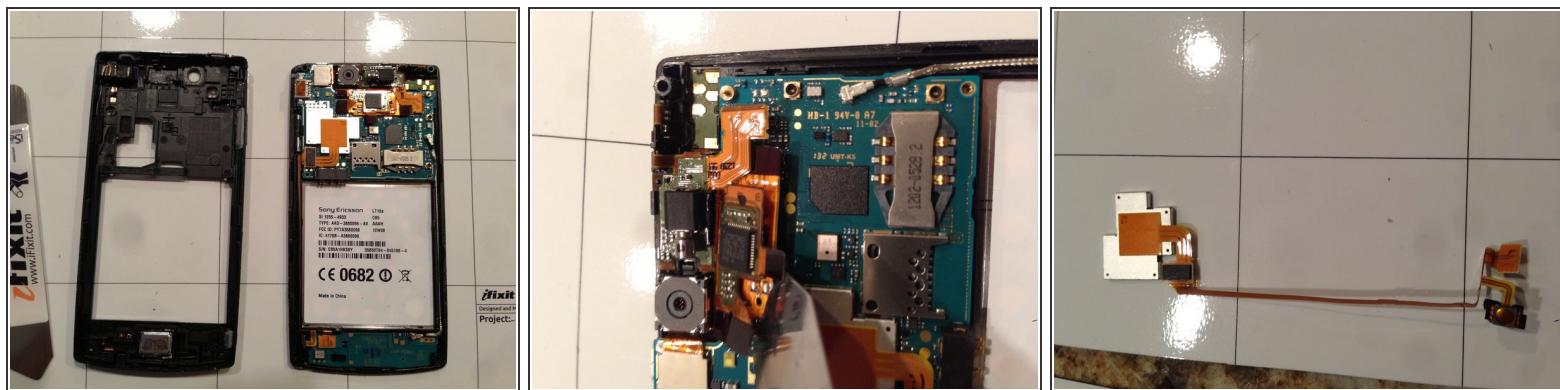

- Once the backplate is removed, no more screws or spudging needed!
- Pop out the cable connectors
- Remove the camera assembly

## Step 3

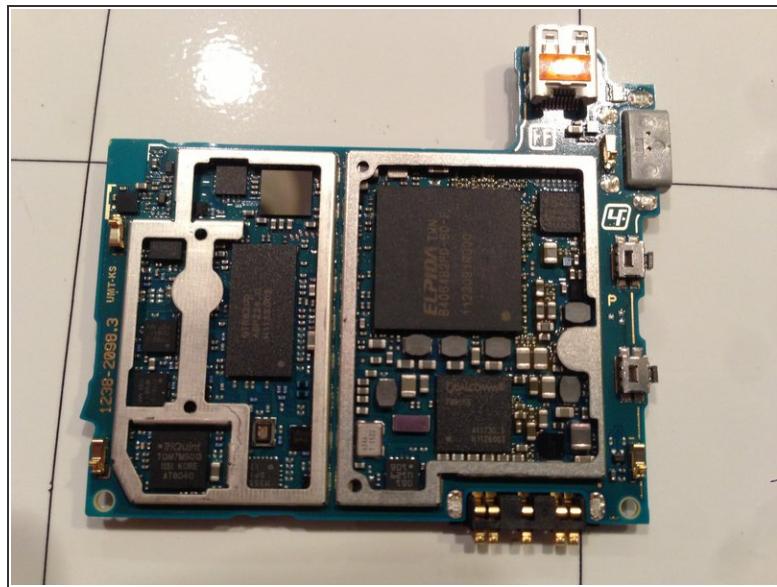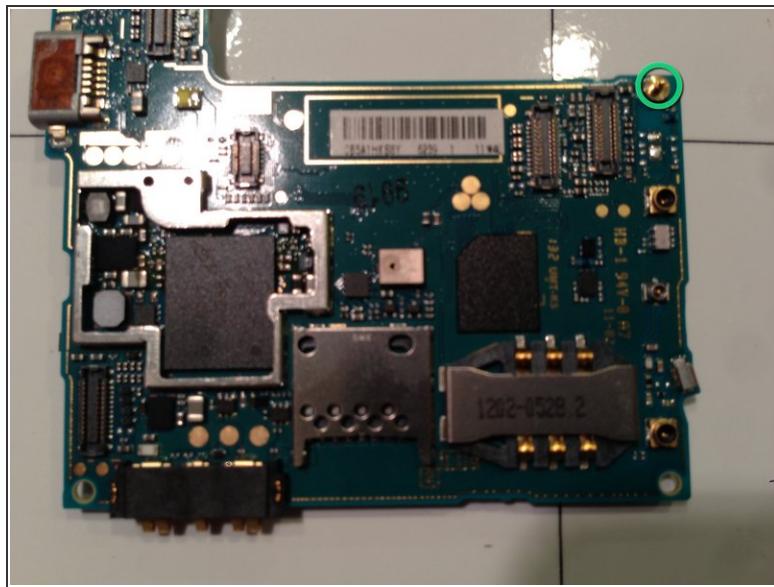

- Top and bottom of the board with shielding removed
  - Loving the pogo pins
- Charge not save