



# Sony Xperia E4 Touch Screen Glass / LCD Display Replacement

Sony Xperia E4 Touch Screen Glass / LCD Display Replacement

Written By: ZFix



# INTRODUCTION

E2104, E2105, E2115, E2124

How to disassemble, take apart the device and change / replace broken touch screen glass digitizer, LCD

[video: <https://www.youtube.com/watch?v=dlpq41LcFzk>]

## TOOLS:

- [iFixit Opening Picks set of 6](#) (1)
- [T4 Torx Screwdriver](#) (1)
- [Tweezers](#) (1)
- [Heat Gun](#) (1)
- [Double Sided Adhesive Tape - 3 mm Width](#) (1)

## Step 1 — Battery Cover



- Remove the back cover and any installed SIM and memory cards.
- There are 8x black screws Torx T4. Remove them.

## Step 2




- Remove the small black rubber at the lower left corner.
- Under it is the battery flex cable, disconnect it.

## Step 3




- Use a plastic tool to separate the middle frame.
- The battery is glued to the middle frame with an adhesive tape.
- Loudspeaker

## Step 4 — Logic Board

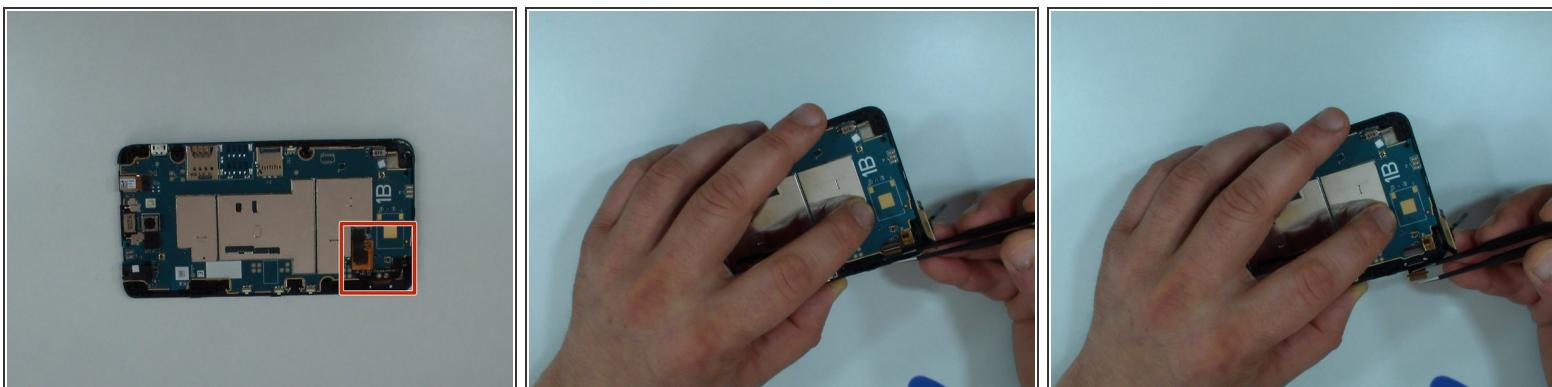

- Disconnect the touch screen flex cable.
- Under it is the LCD flex cable. Disconnect it also.

## Step 5

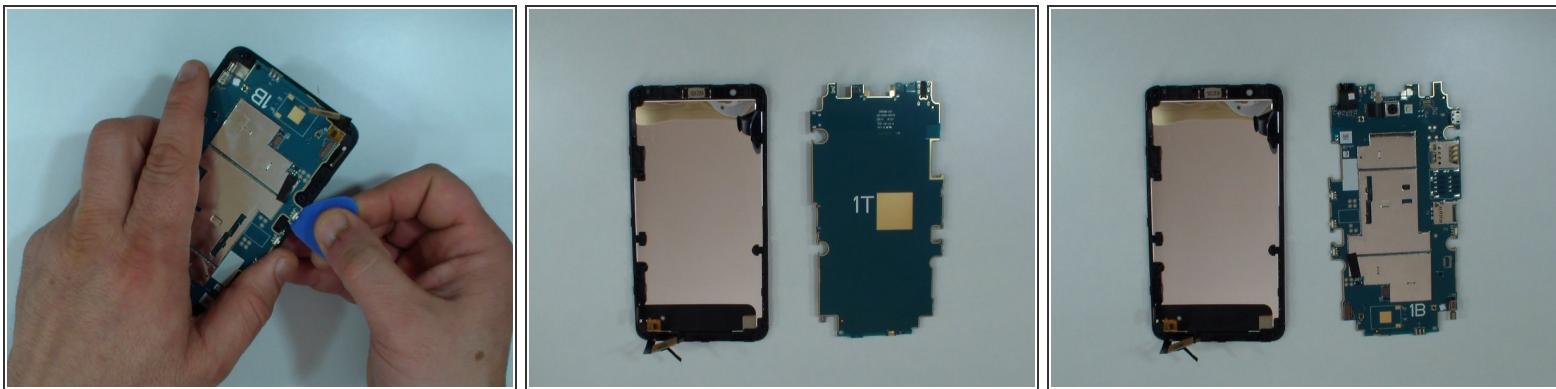

- Remove the logic board.

 Be careful for the flex cables.

## Step 6 — Touch Screen Glass / LCD Display



- Cover the glass with a scotch tape.
- Warm the glass for about minute.
- With a cutter lift a little the glase to make a room for the plastic tool.

## Step 7




- Carefully put the plastic tool between the glass and the LCD.

 The tool must be thin, you can use also a plastic card.

 Periodically warm the glass.

- Remove the display frame.

## Step 8

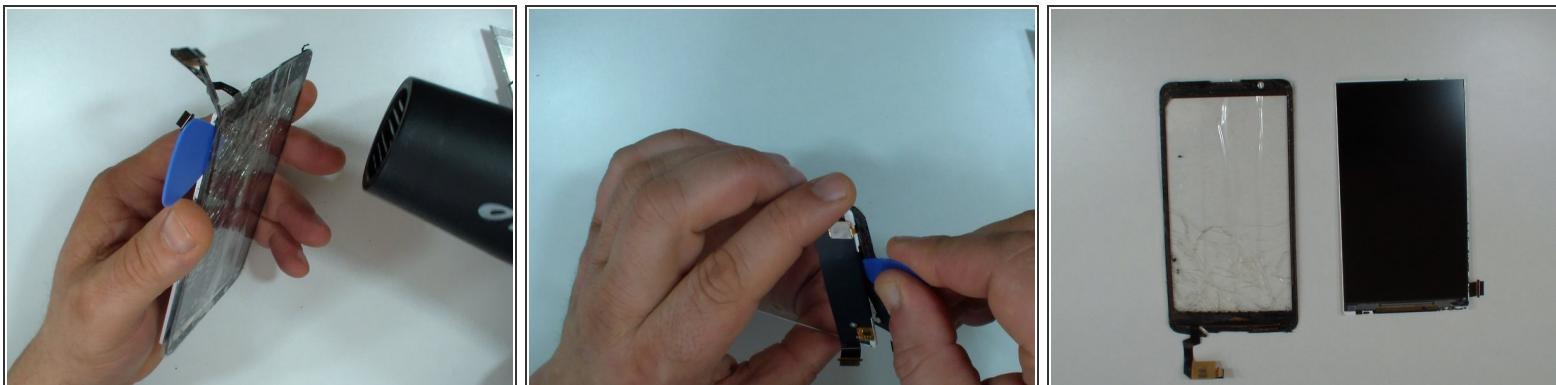


 Use only plastic tools and don't force the LCD.

## Step 9



- Install adhesive tape.  
*(i)* It's easier if you order your touch screen together with adhesive sticker.
- Start with the reassembling.

## Step 10

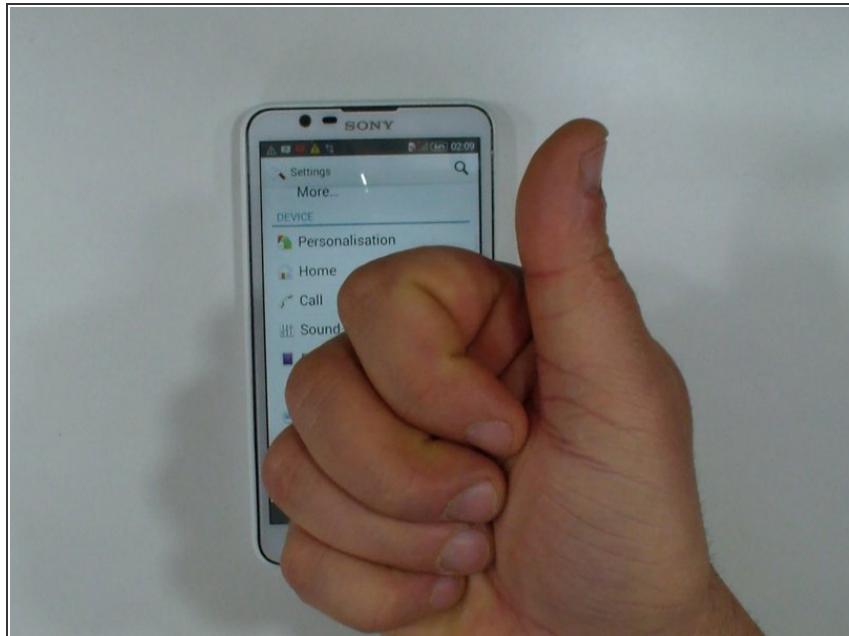

- That's all.

To reassemble your device, follow these instructions in reverse order.