




# Sony Xperia M2 Loudspeaker Replacement

Sony Xperia M2 Loudspeaker Replacement

Written By: ZFix

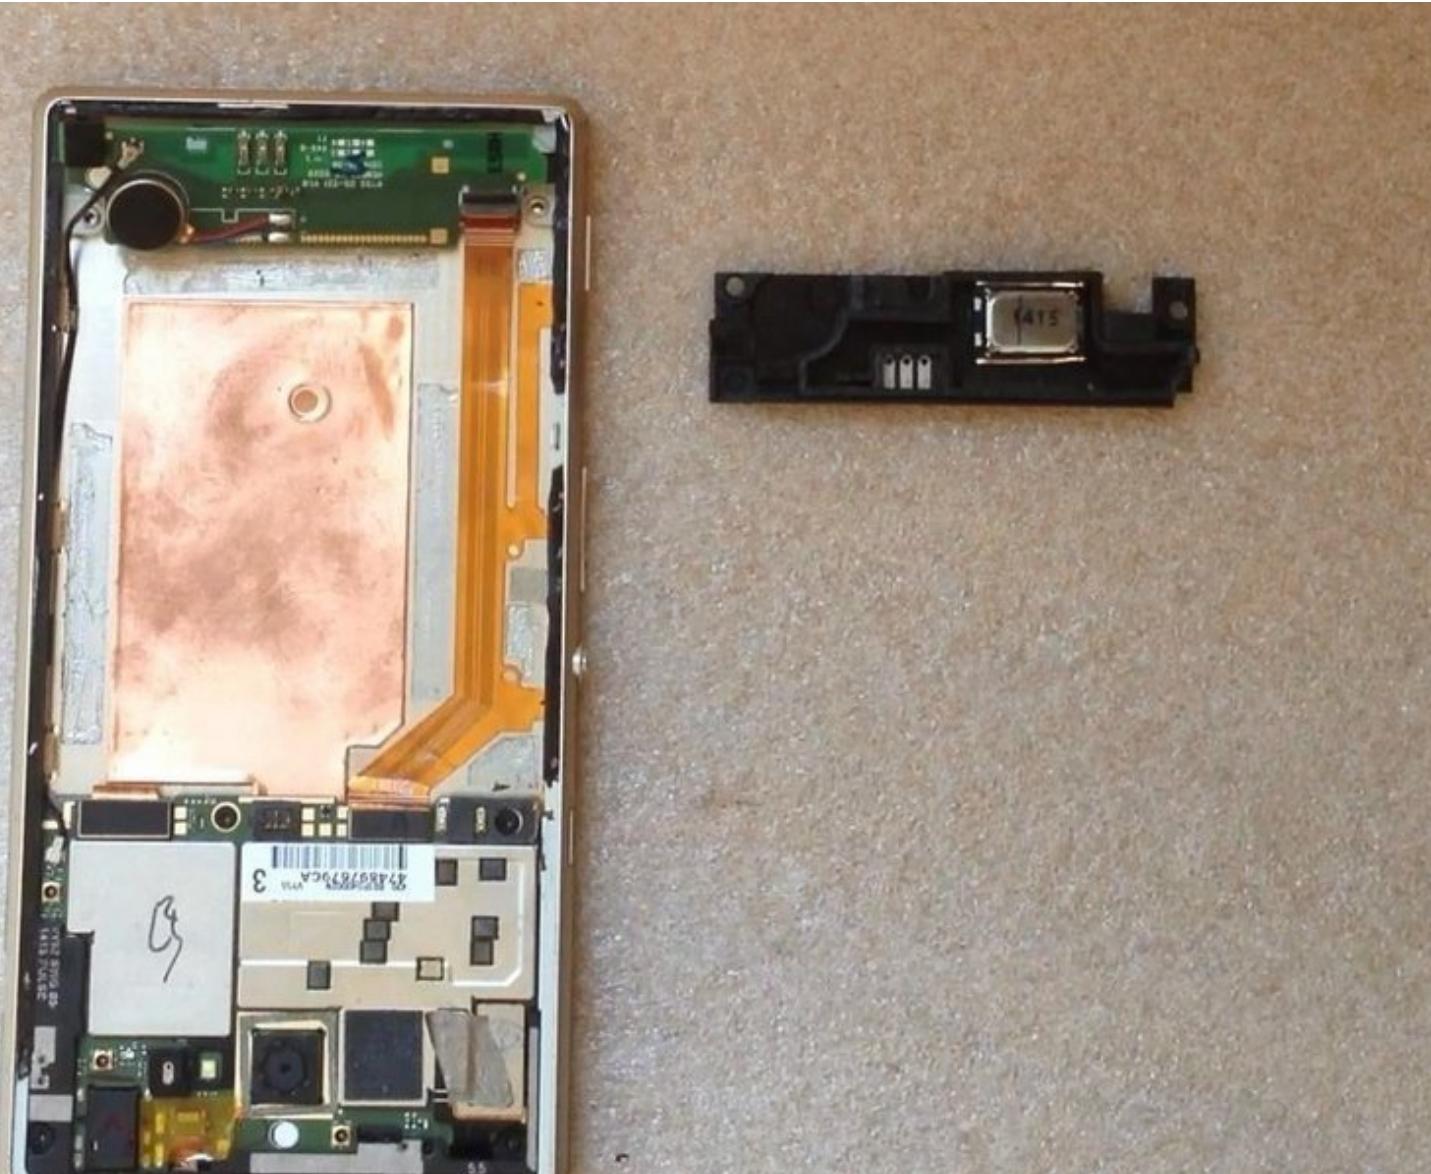

## INTRODUCTION

With this guide we will help you if you have a problem with the Loudspeaker and you want to disassemble the phone and change it.

[\*\*Please SUBSCRIBE to my channel ↴\*\*](#)

[video: [http://youtu.be/TpZRy6rl\\_hc](http://youtu.be/TpZRy6rl_hc)]

## **TOOLS:**

- [iFixit Opening Tools](#) (1)
- [Suction Handle](#) (1)
- [Spudger](#) (1)

## Step 1 — Rear Cover



- Warm the Back Cover. You can use a hairdryer.

 Be careful, the Cover is plastic.


- Use a small suction cup and plastic tools for separating the Rear panel.
- Before installing the new cover, you must clean the phone from the old adhesive tape and install a new one if your spare part has come without double sided adhesive tape.

## Step 2 — Battery





- Disconnect the Battery Cable.
- The battery is stuck to the phone frame. Use the white tape to remove it.
- Li-Polymer Battery, 2230 mAh
- Part number: LIS1551ERPC
- [\*\*Please SUBSCRIBE to my channel ↴\*\*](#)

## Step 3 — Loudspeaker

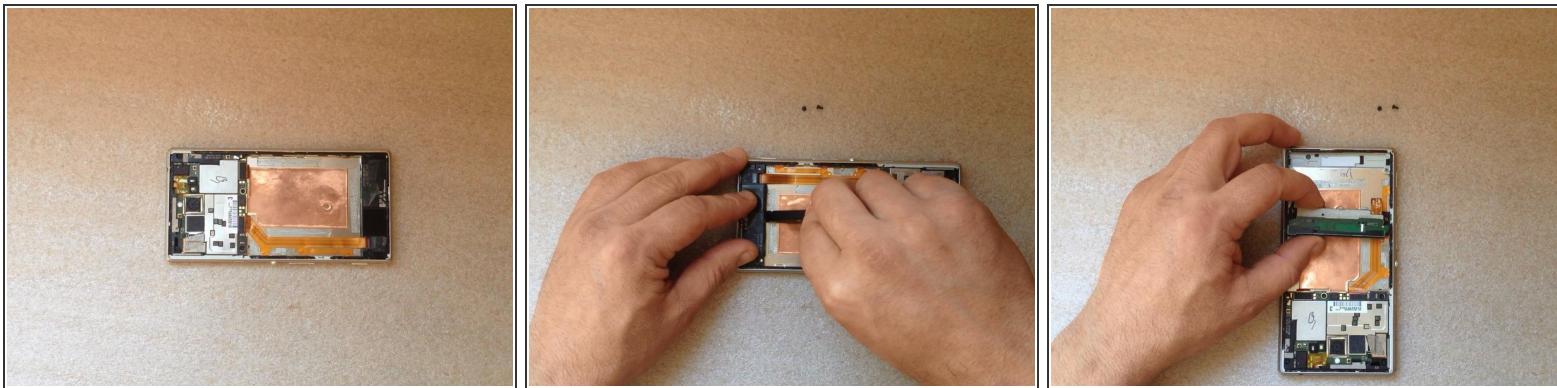

- Remove the two T5 screws.
- Use a plastic tool to unstuck the the Loudspeaker module from the Main frame.

## Step 4

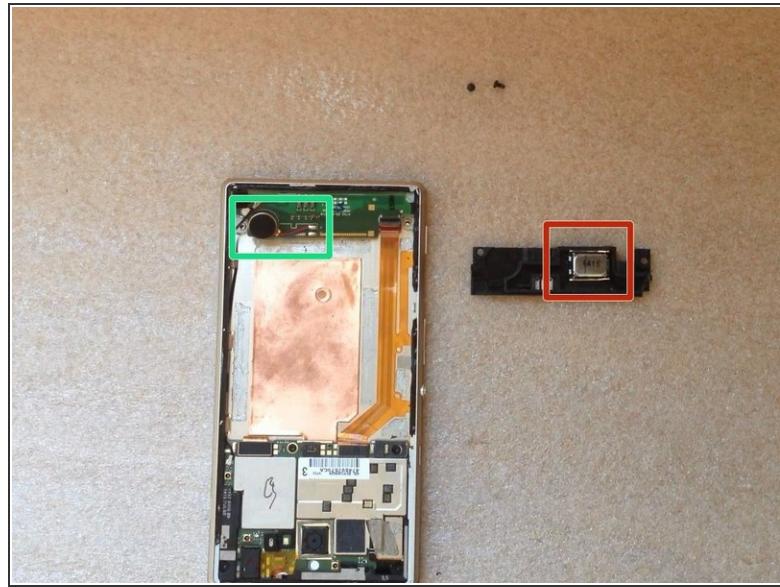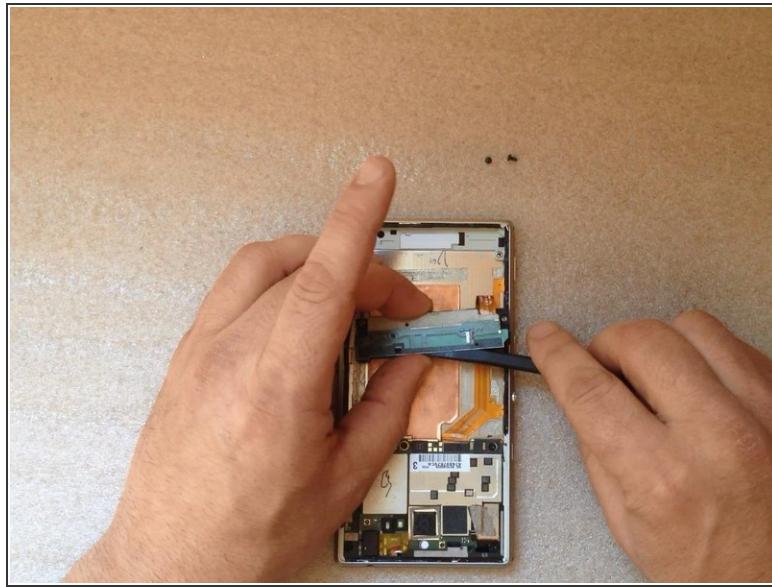

- Open the Loud speaker module.
  - Loudspeaker
  - Vibromotor

 [\*\*Please SUBSCRIBE to my channel\*\* ↗](#)

To reassemble your device, follow these instructions in reverse order.