



Sony Xperia TL Battery Replacement

This guide will teach you how to access and remove the battery.

Written By: Adam Giniger



INTRODUCTION

Removing this part is hard for the first time because the manufacturer used adhesive to keep it in place.

TOOLS:

- [Phillips #00 Screwdriver](#) (1)
- [iFixit Opening Tools](#) (1)

Step 1 — Remove Top Plastic Section



- Use the plastic opening tool to pry the top plastic section off.

Step 2 — Remove Bottom Plastic Section




- Use the plastic opening tool to pry the bottom plastic section off.

Step 3 — Unscrewing the Back Off



- Remove the four 5mm screws.
- Use the plastic opening tool to pry off the back.

Step 4 — Battery

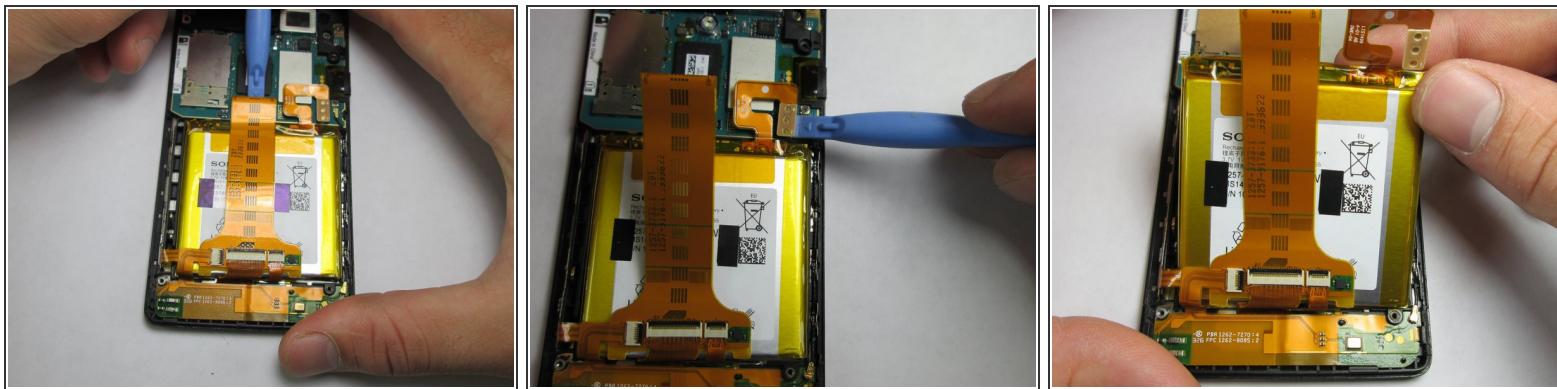

- Use the plastic opening tool to detach the ribbon running across the battery.
- Use the plastic opening tool to detach the ribbon connecting the battery to the motherboard.

To reassemble your device, follow these instructions in reverse order.