



Spin Master Hatchimal Draggle Fur Replacement

Removing the fur from the Spin Master Hatchimal Draggle for cleaning or replacement.

Written By: Kimberly Searles



INTRODUCTION

Toys go through a lot, and many times they get dirty. This guide will show you how to remove the fur for further cleaning or full replacement.

TOOLS:

- [iFixit Opening Tools](#) (1)
- [Utility Scissors](#) (1)
- [Spudger](#) (1)
- [Phillips #00 Screwdriver](#) (1)

Step 1 — Plastic Wing Replacement



- lay the Hatchimal on its side.

Step 2



- Using the plastic opening tool, push in on the purple clip.


Step 3



- Pull the wing off of the hatchimal.


(i) The wing should come off with little resistance.

Step 4 — Fur Replacement

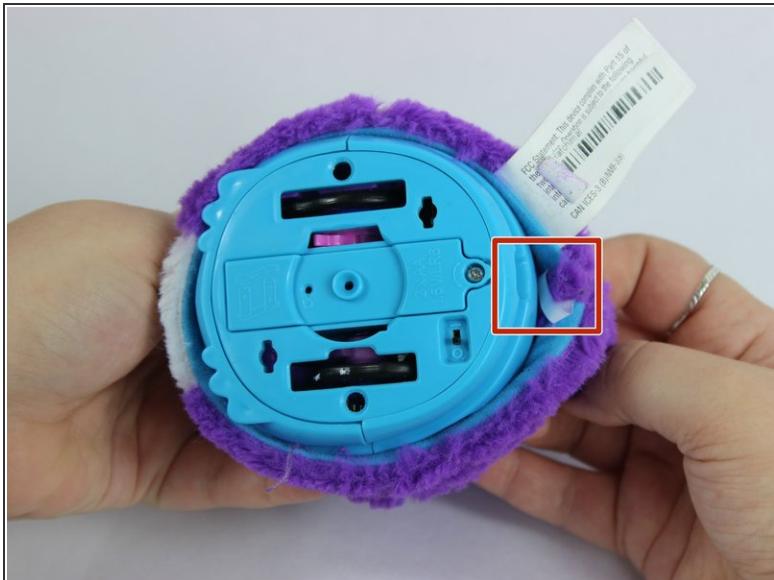

- Cut the fur retaining zip-tie with a pair of scissors.

Step 5

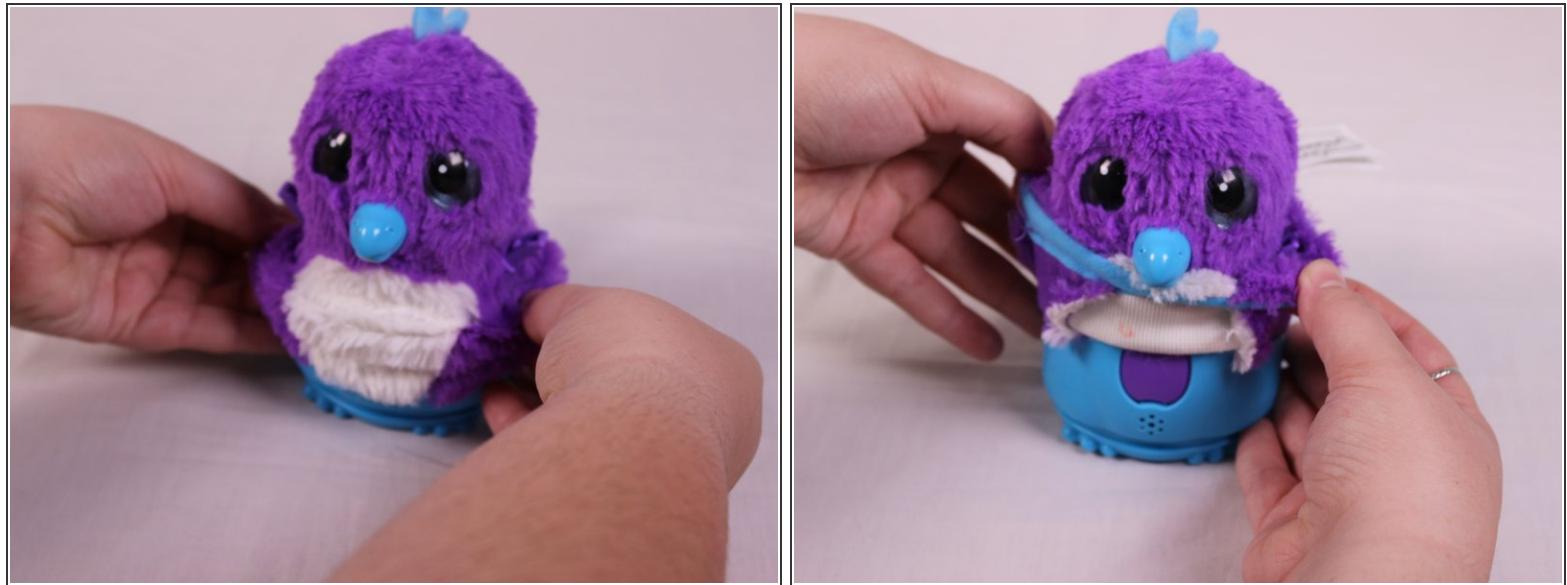

- Lift the fur up until it can't go further.

Step 6




- Use the spudger tool to push up on the black clip to free it.
- Pull the clip out.

Step 7





- Lift fur up to reveal the next set of clips.
- Insert a spudger to push up on the black clip to free it.
- Pull out the clip.

Step 8

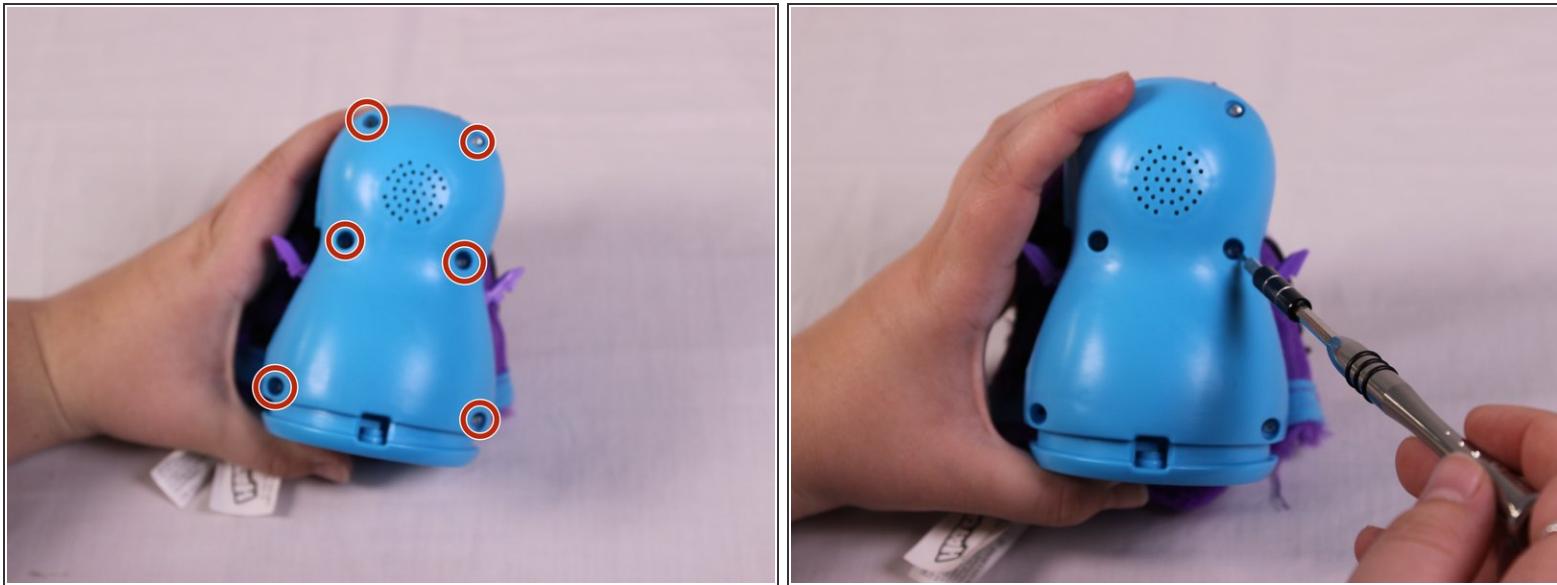



- Lift the fur up and over the Hatchimals Head.
- Remove the six 12mm Phillips #00 screws from then body.

Step 9

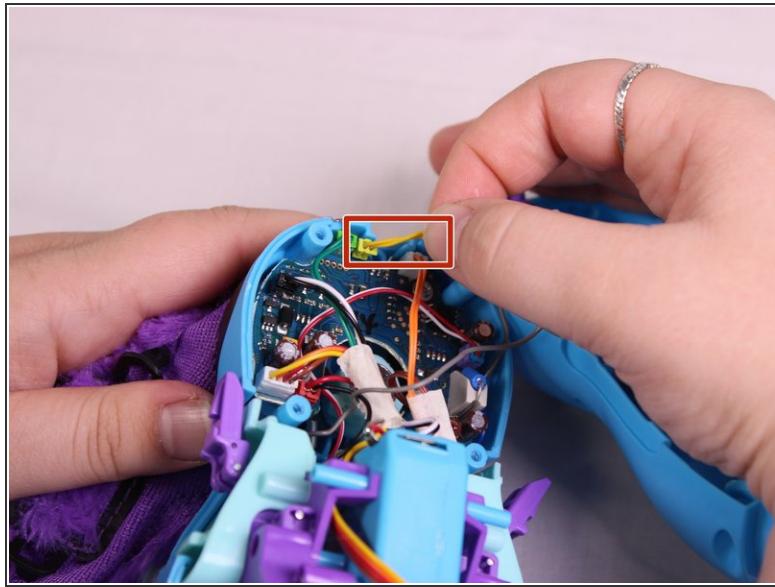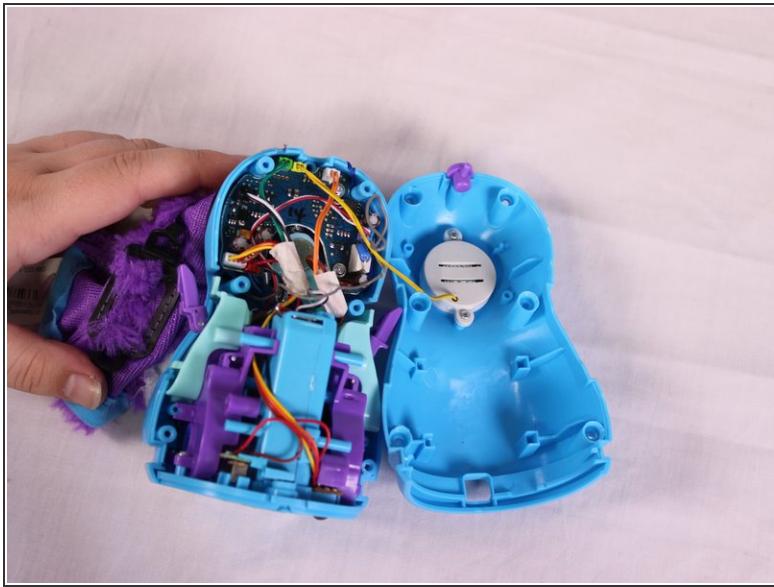

- Pull the casing apart.
- Remove the yellow speaker cable.

Step 10

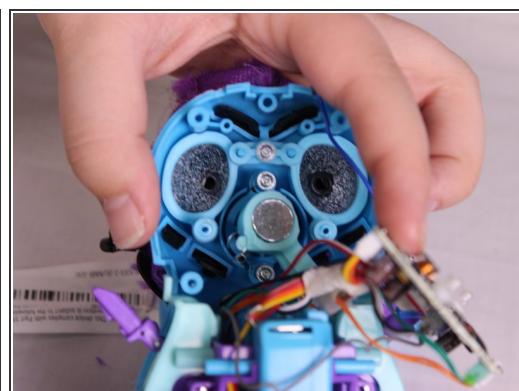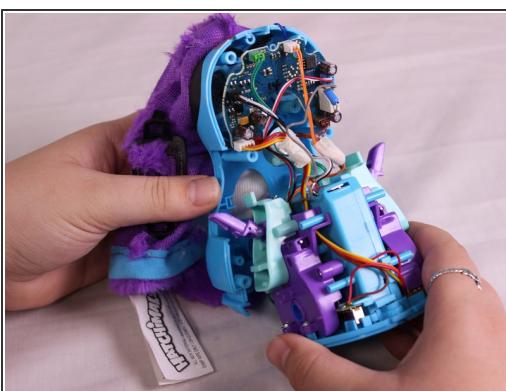

- Remove the three 7mm Phillips #00 screws from the head.
- Remove the wheel base and the circuit board carefully not to damage the spring.

Step 11



- Push the six black fur clips out using the spudger.
- Remove the fur completely.

To reassemble your device, follow these instructions in reverse order.