



Sprout Channel Cubby Front Half Replacement

prerequisite only


Written By: jasen biggins



 **TOOLS:**

- [iFixit Opening Tools \(1\)](#)

Step 1 — Dissasemble the device

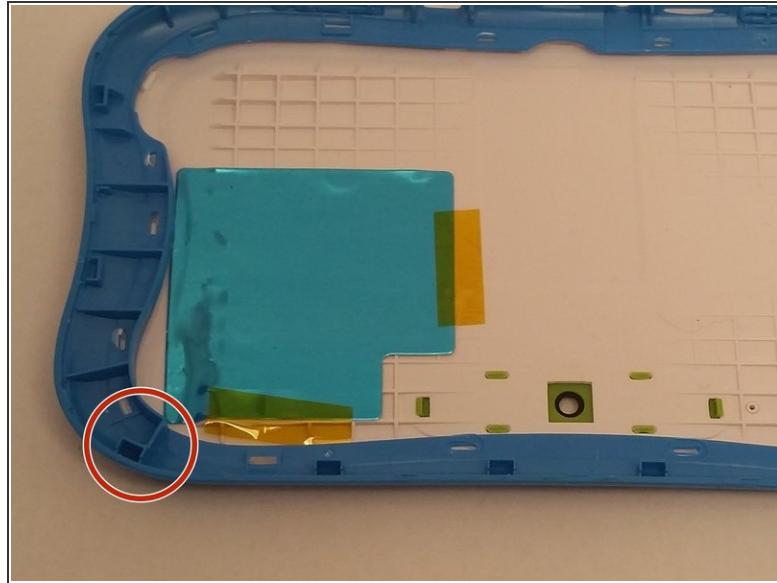

- Use an opening tool to push in and release sixteen small plastic clips around the edge of the case. As the clips are released, gradually pry the case apart.
(i) It is easiest to start on the corners.

To reassemble your device, follow these instructions in reverse order.