




SteelSeries Arctis Pro Plus GameDAC Headset Mute Button Replacement

This guide will show how to replace the physical mute button on the SteelSeries Arctis Pro Plus GameDAC headset.

Written By: Kyle Chang

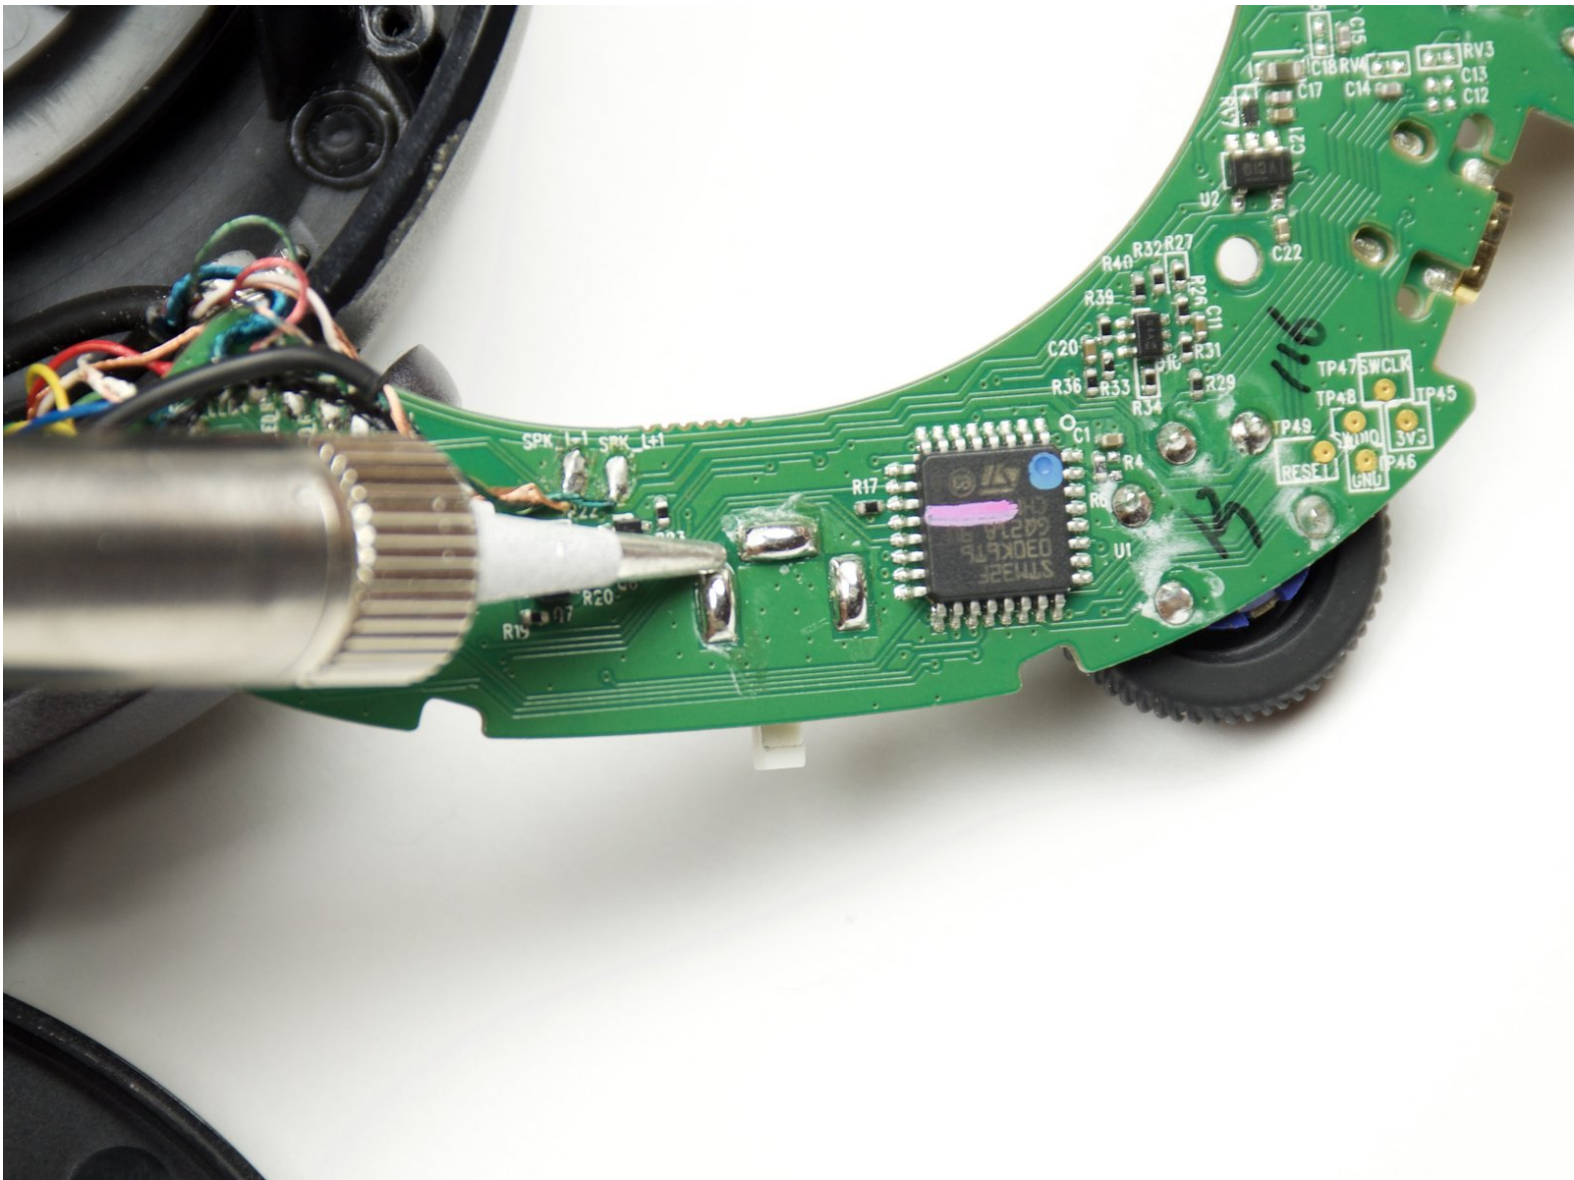

INTRODUCTION

If the headset mute button is not pressing down or not muting the microphone, the physical button may need to be replaced. Follow this guide to safely replace the button.

TOOLS:

- [Phillips #0 Screwdriver](#) (1)
 - [Soldering Iron](#) (1)
-

Step 1 — Headset Ear Cushions



- Lift the edge of the cushion and pull out slightly.
- Work your way around the cushion until it comes off completely.
- Repeat for the other cushion.

Step 2 — Headset Circuit Board




- Remove the three 5mm screws with a Phillips #0 driver head on the headphone with the microphone.

Step 3



- Lift the speaker off the headset to expose the circuit board.

 Be careful not to lift the speaker too quickly or too forcefully to prevent the wires from being pulled out of their connections.

Step 4



- Remove the three 5mm screws using a Phillips #0 driver head.

Step 5




- Lift the circuit board out of the plastic housing.
- ⓘ Press in on the volume wheel while pulling on the circuit board to help maneuver the circuit board out of the housing.

Step 6 — Headset Mute Button Cap





- Flip the circuit board over and remove the keycap by pulling on it.

Step 7 — Headset Mute Button

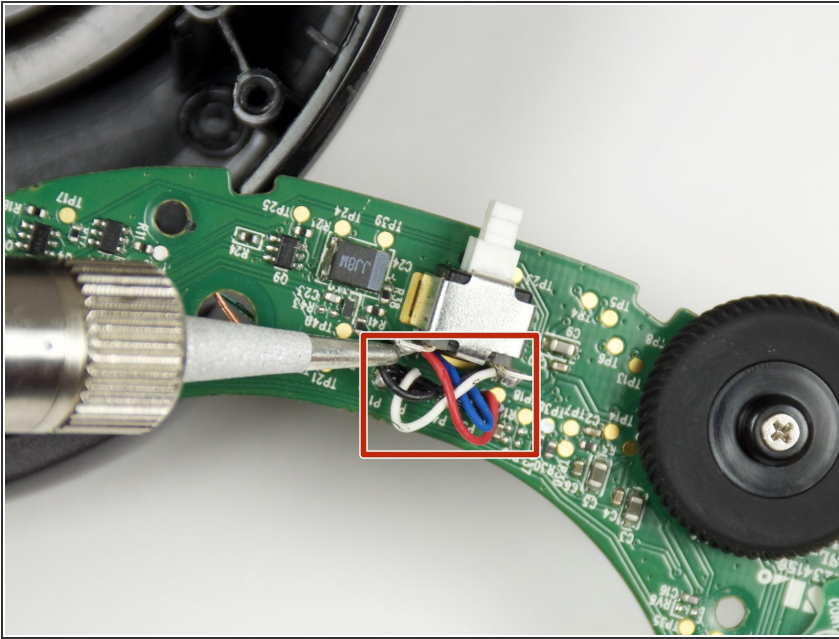

- Desolder the wires connecting the button to the circuit board.
- ⓘ For help desoldering connections, follow this useful guide on [How To Solder and Desolder Connections](#).
- ⚠ Use caution when soldering. The heated tip may cause damage to the board or burn you.

Step 8

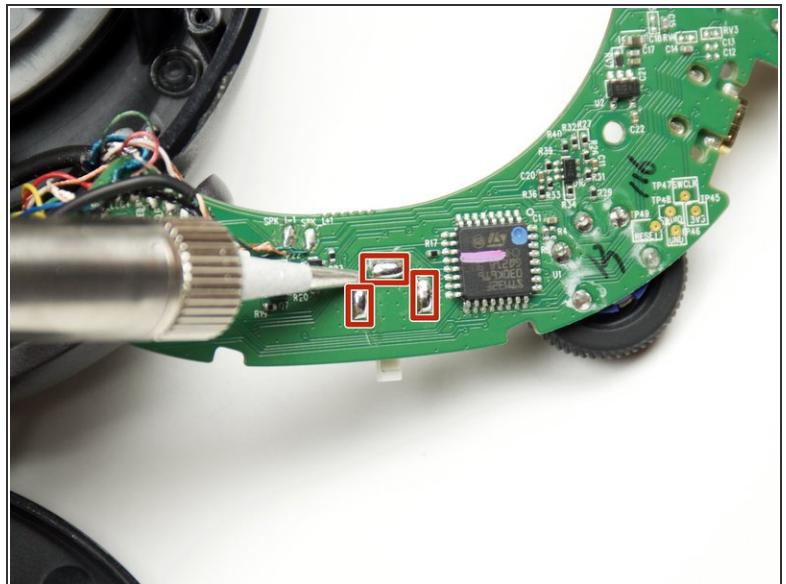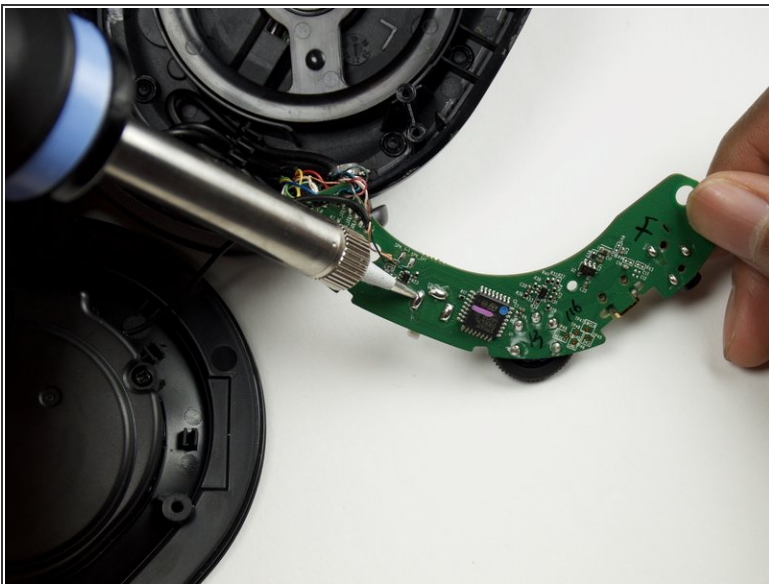

- Desolder the three pins to remove the button from the circuit board.
- For help desoldering connections, follow this useful guide on [How To Solder and Desolder Connections](#).
- ⚠ Use caution when soldering. The heated tip may cause damage to the board or burn you.

This document was generated on 2020-01-14 07:15:31 AM (MST).

To reassemble your device, follow these instructions in reverse order.