



# Summer 3D Lite Convenience Stroller Seat Replacement

This guide will show you how to take the seat out in order to replace it.

Written By: Pradeep Sangli



## INTRODUCTION

If the seat gets dirty, or the fabric is damaged, this guide will show you how to take the seat out.

### TOOLS:


- Phillips #1 Screwdriver (1)

## Step 1 — Seat



- Remove the two silver 12.7 mm #01 screws (1 on each side) holding the back of the seat to the frame.

## Step 2

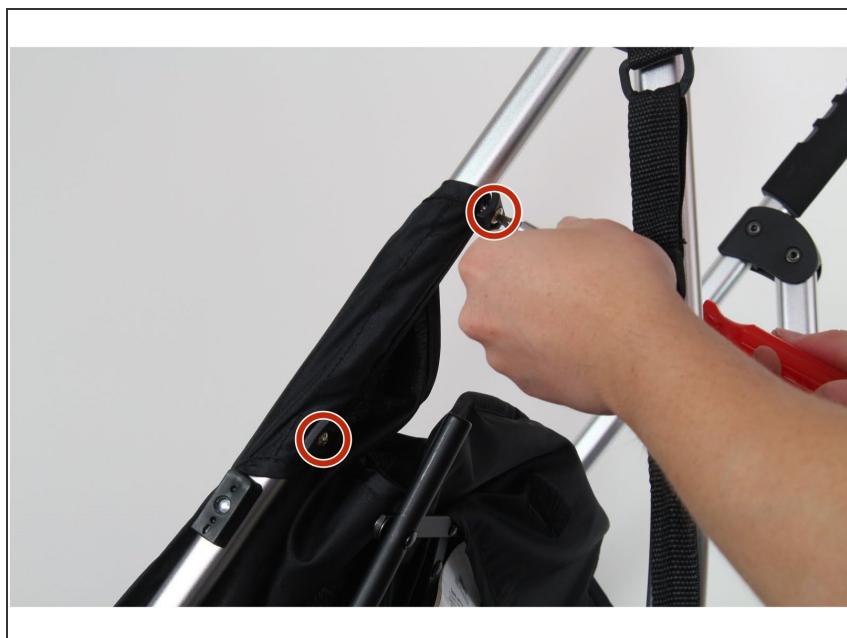

- Unscrew the four silver 12.7 mm #01 screws (2 on each side) holding the fabric along the handlebars on both sides.

## Step 3



- Unscrew the four silver 12.7 mm #01 (2 on each side) screws on the bottom of the frame where the fabric is held in place.

## Step 4



- After checking that all screws are unattached, pull the seat off.

To reassemble your device, follow these instructions in reverse order.