




Supersonic Matrix SC-91MID Battery Replacement

This guide will show you how to replace the battery.

Written By: Jake

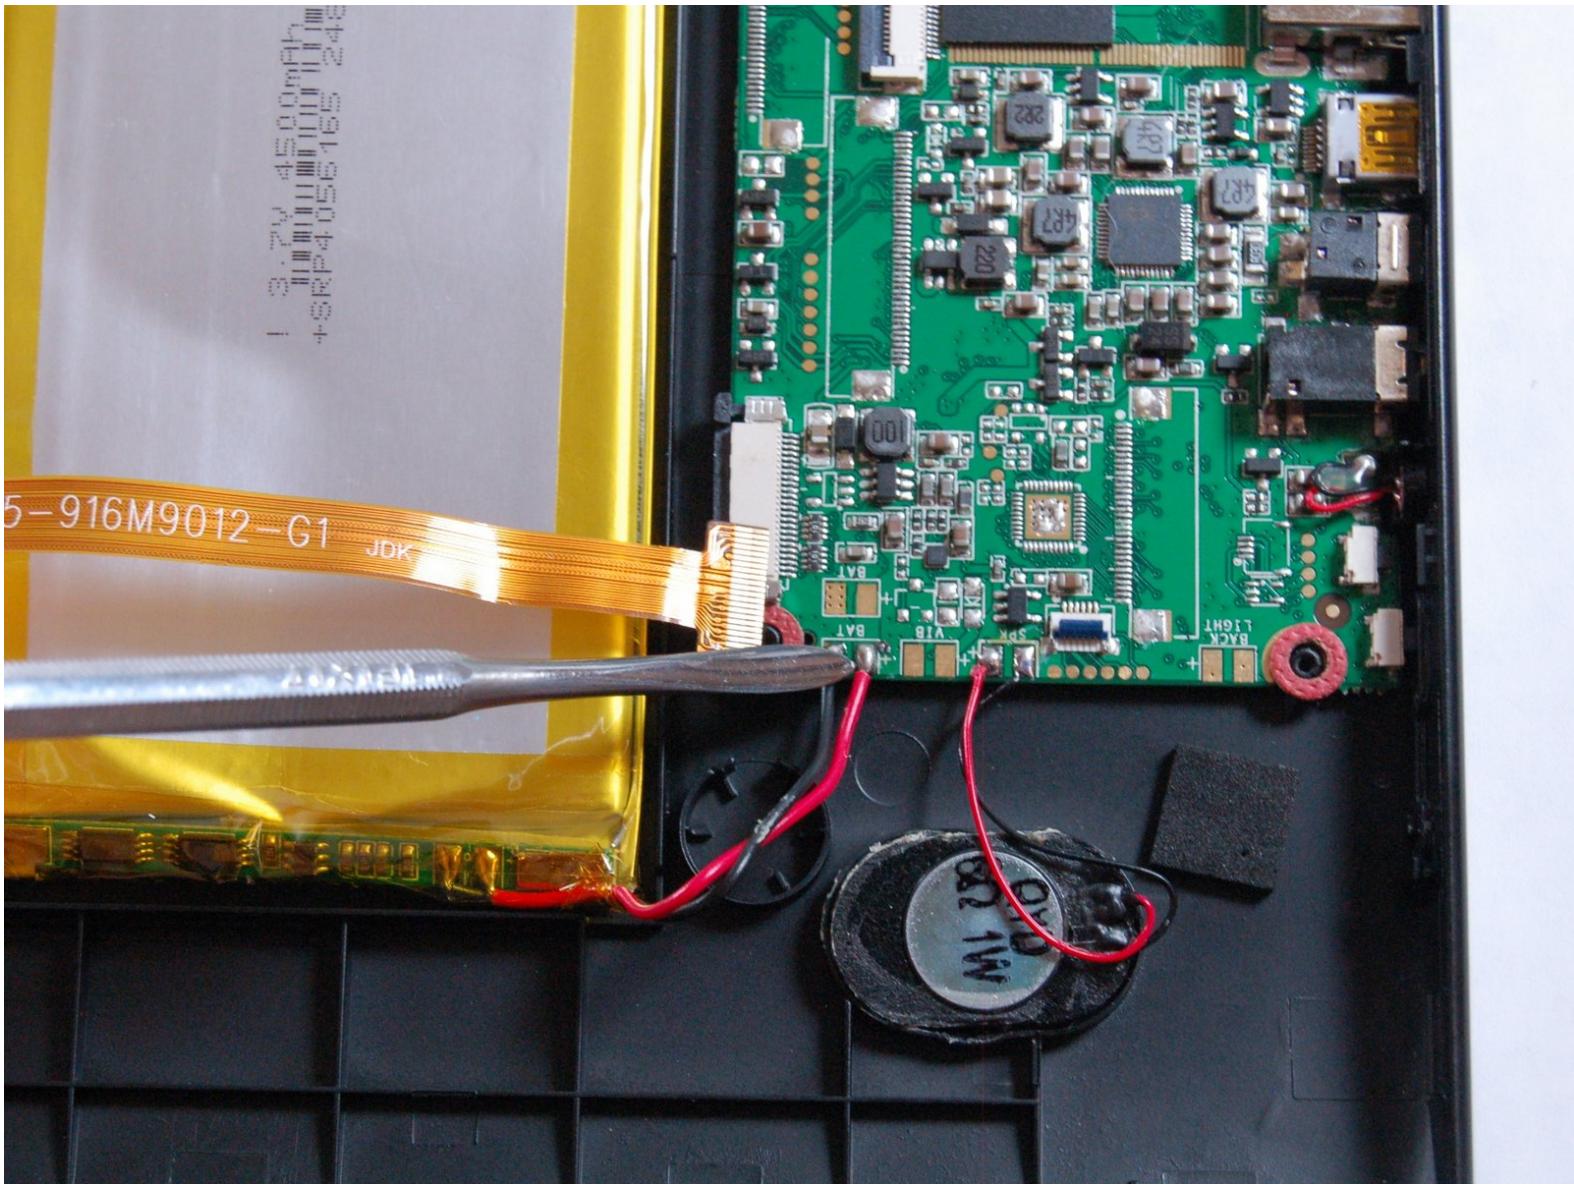

INTRODUCTION

In this guide, you will open up the tablet, disconnect the display ribbons from the motherboard, and remove the battery.

TOOLS:


- [Tweezers \(1\)](#)
- [Soldering Iron \(1\)](#)
- [Spudger \(1\)](#)

Step 1 — Battery




- First, you will need to open up the tablet using the wedger.

Step 2

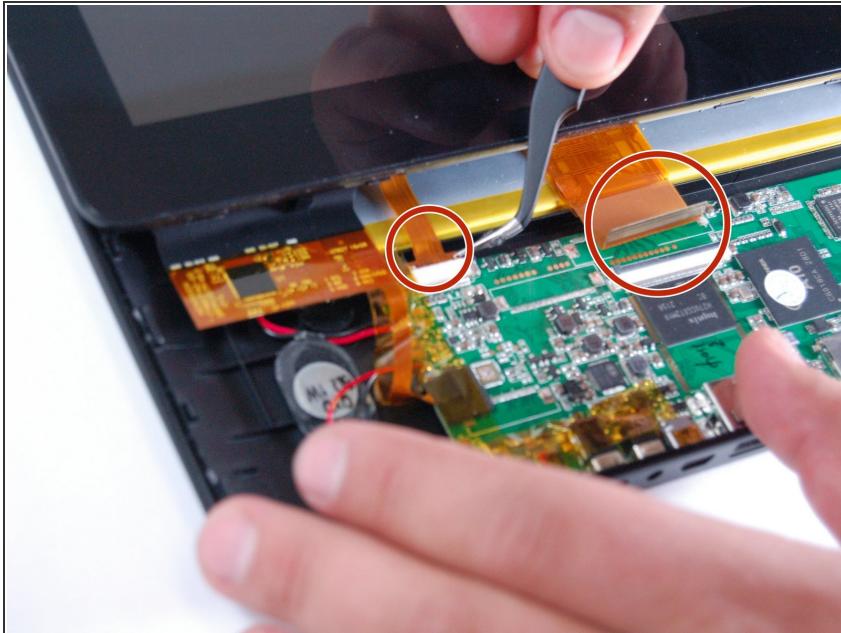

- Carefully remove the touch screen tape sensors using tweezers in order to separate the two halves.

Step 3

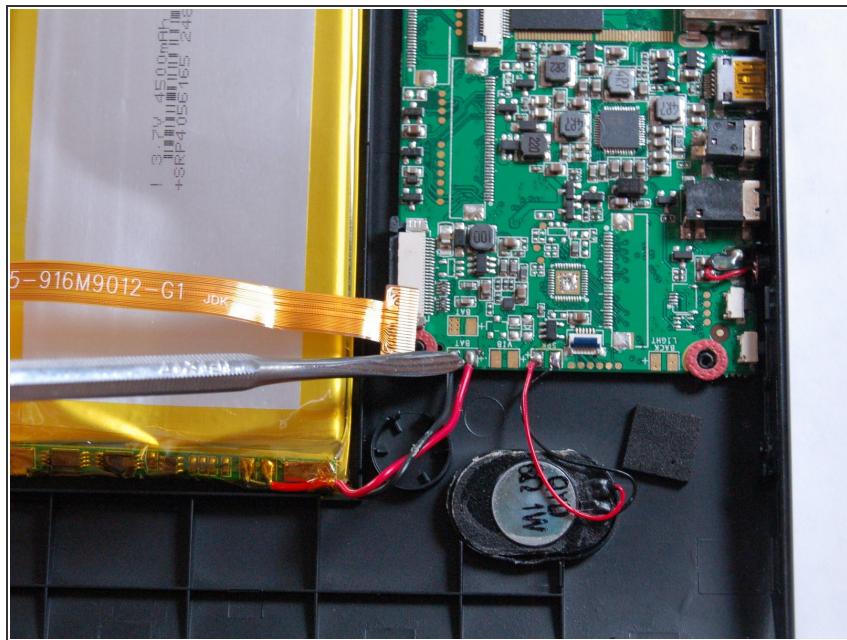

- You will need to desolder the battery from the motherboard. Once its off you just solder the new battery in its place.

To reassemble your device, follow these instructions in reverse order.