



# SwagTron T1 Back Panels Replacement

Use this guide to replace the 2 back panels of your SwagTron T1.

Written By: Adrian Abarca




## INTRODUCTION

This explains what will be necessary to not only replace the back panels, but also open the SwagTron T1 to have access to other parts.

### TOOLS:

- [Phillips #2 Screwdriver \(1\)](#)


## Step 1 — Back Panels

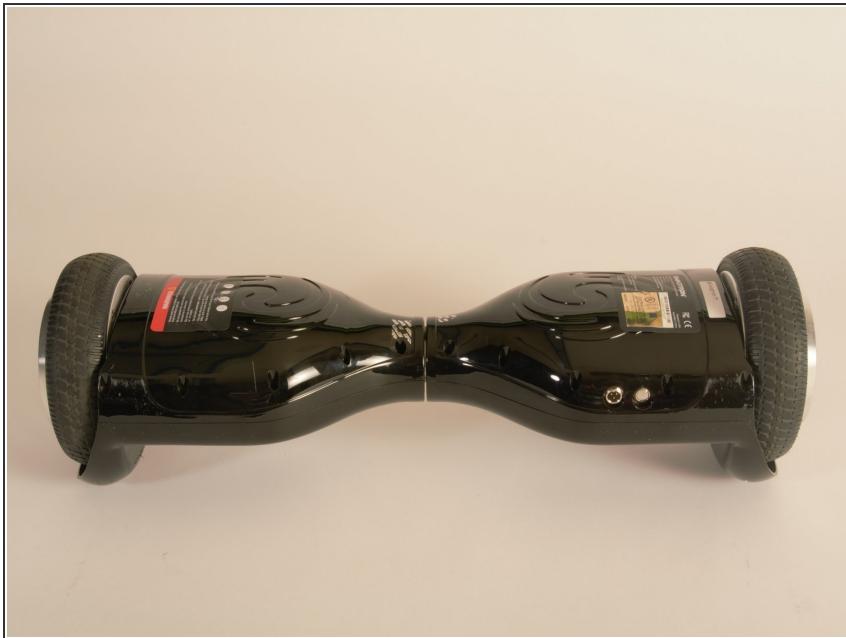

! Ensure that the SwagTron is off.

- Turn the SwagTron upside down to see the underside.

## Step 2

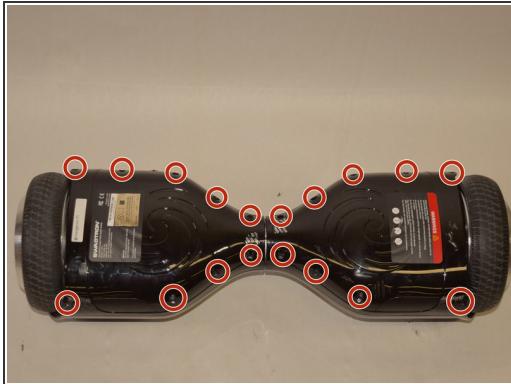


- Unscrew the eighteen 10mm screws that secure the back panels using a Phillips #2 screwdriver.
- i The screws are tightly in place. It will take effort to screw them out.

! The panel is still attached to the SwagTron by wires that go to the motherboard.

- Carefully lift the panels off

## Step 3

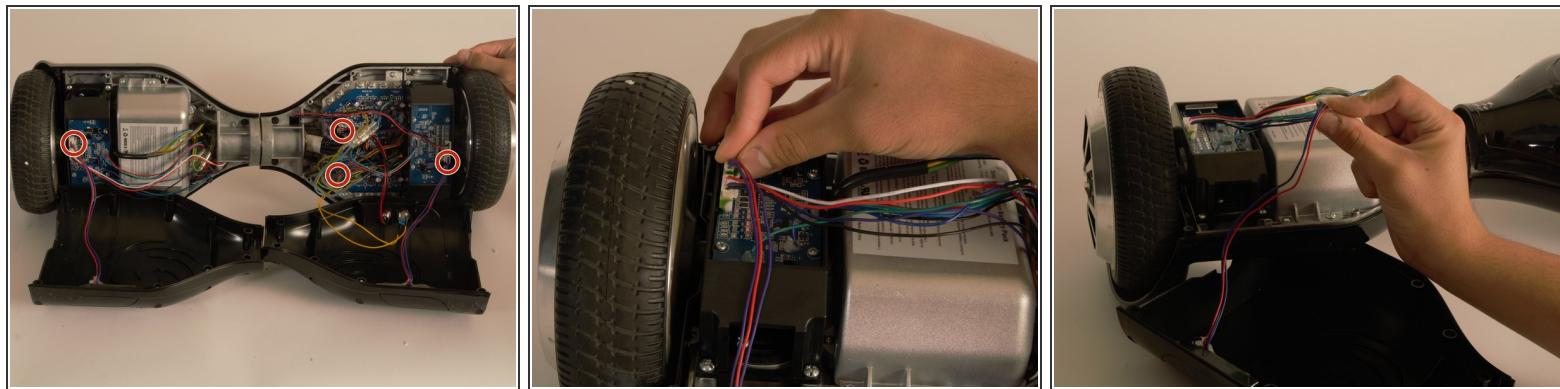

- Follow the wires from the panels to the motherboard.
- You may need to cut any zip ties that are holding the wires together.
- There is one connection on the battery side and three on the other side that must be removed.

**⚠** These connections may be difficult to remove. Try to securely press the connection and pull firmly.

- Your back panels are now completely removed.

To reassemble your device, follow these instructions in reverse order.