




# Tengda S5 Plus Speakers Replacement

Replacing your broken or damaged speakers on your Tengda S5 Plus.

Written By: Andrew Lam

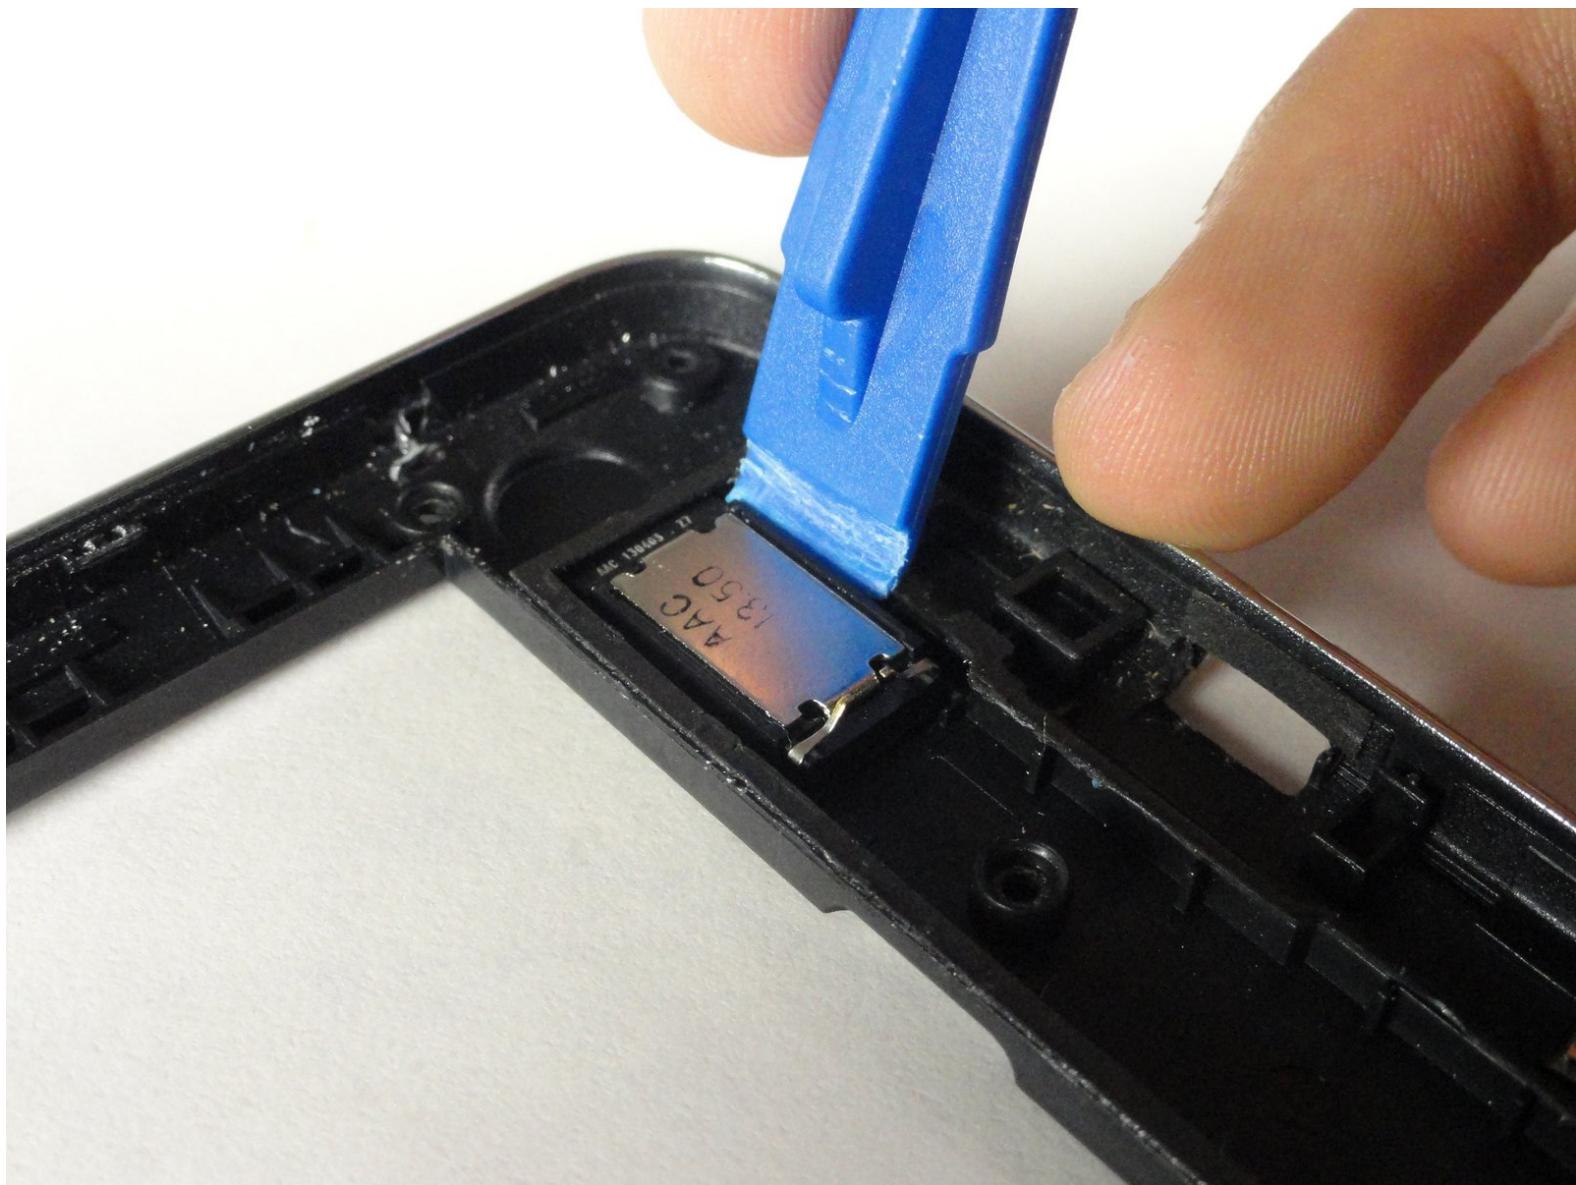

## INTRODUCTION

This guide is help you reach your speakers in case you need to clean or replace it. The only tools you will need for this guide are a plastic prying tool and a Phillips #00 screwdriver.

### TOOLS:


- [Spudger \(1\)](#)
- [iFixit Opening Tools \(1\)](#)
- [Phillips #00 Screwdriver \(1\)](#)

## Step 1 — Back Panel



- Place the phone screen-side down.

## Step 2

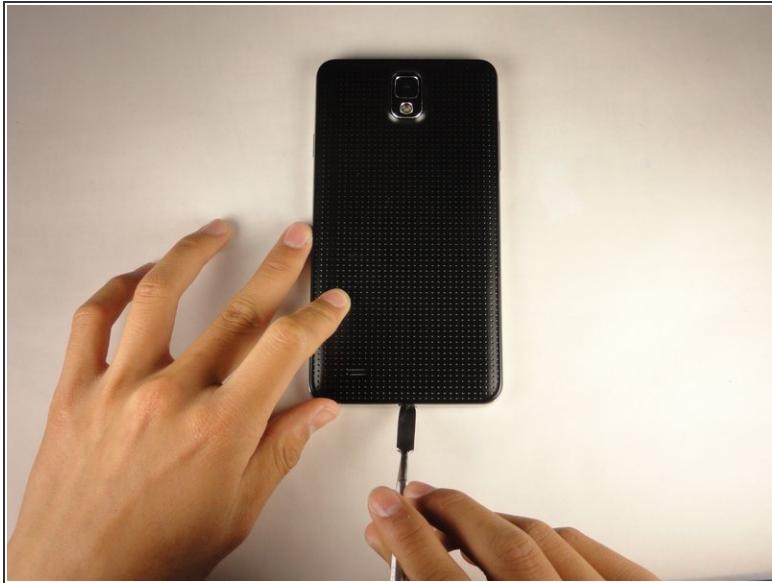

- Using your fingernail or any prying tool (we used the Metal Spudger), begin to pry away the back panel starting at the bottom of the phone.
- Continue to work your way around the phone counterclockwise until you can pull the back cover off.

## Step 3 — Speakers




- Using either your thumb or an iFixit opening tool, remove the battery and set it aside.

## Step 4




- Unscrew the twelve 3 mm screws from the back panel using a Phillips #00 screwdriver.

## Step 5

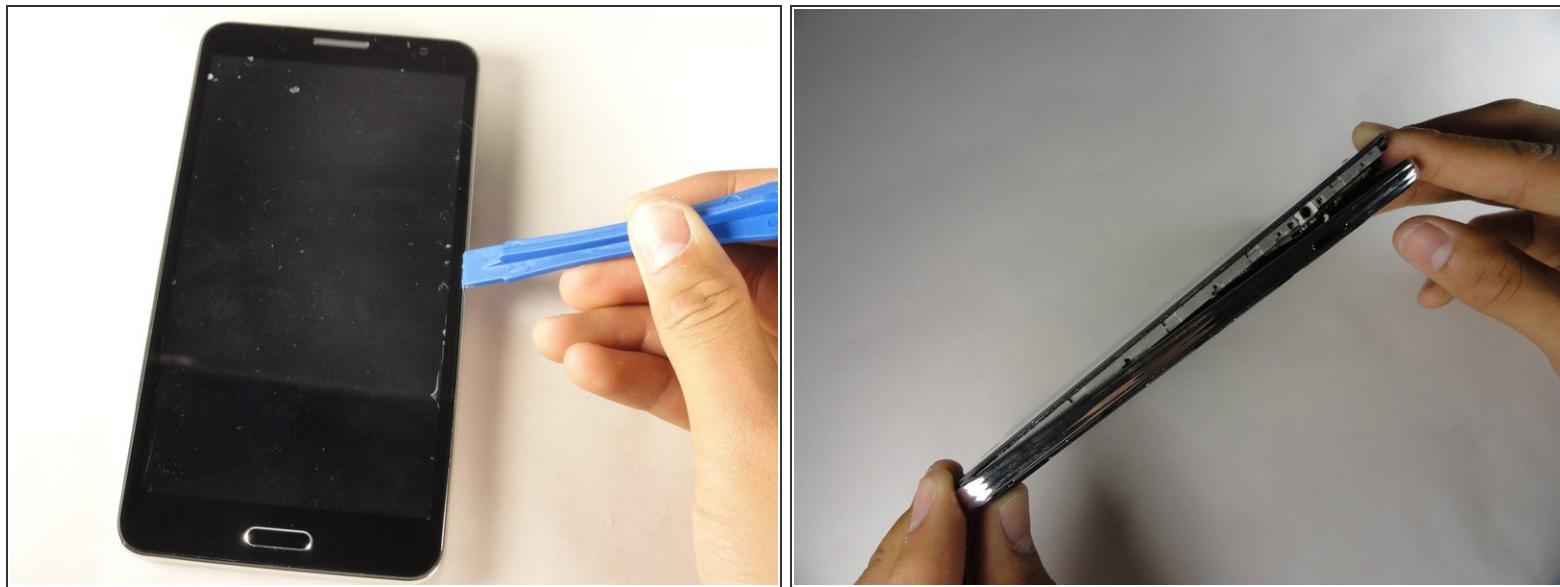

- Using the plastic opening tool, create space between the front screen and the metal casing.
- Once the screen is separated from the back panel, pull the two pieces apart.

## Step 6

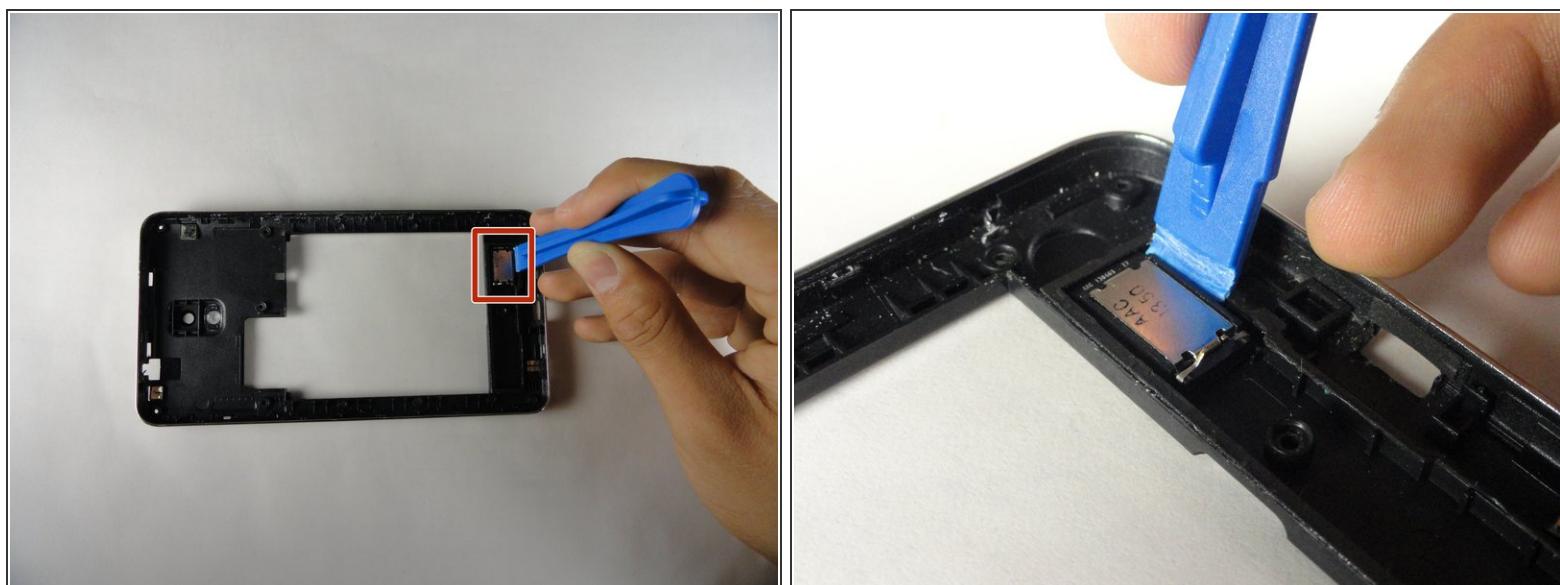

- Using an iFixit opening tool, remove the speakers.
- Do not be afraid to use a little force. The speakers are glued onto the phone, not wired.

To reassemble your device, follow these instructions in reverse order.